

DP E26 Base Downlight

A. IMPORTANT SAFETY INSTRUCTION

When using product, basic precautions should always be followed, including the following:
 Read all warnings including the ones below AND those on the product.

Recessed luminaires (fixtures) are designed to meet the latest NEC requirements and are UL/cUL listed in full compliance with UL. Before attempting installation of any recessed lighting luminaire, check your local electrical code. This code sets the wiring standards for your locality and should be carefully studied before starting.

WARNING - Risk of fire or electric shock. LED retrofit kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings. Does not exceed the input rating of the luminaire.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

This luminaire has not been modified to operate LED Lamp. Do not attempt to install or operate incandescent lamps or CFL in this luminaire.

Suitable for Type IC or Type Non-IC luminaires.


This retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction.





CAUTION: Connect fixture to a 120V/60Hz power source. Any other connection voids the warranty.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

INSIDE THE BOX

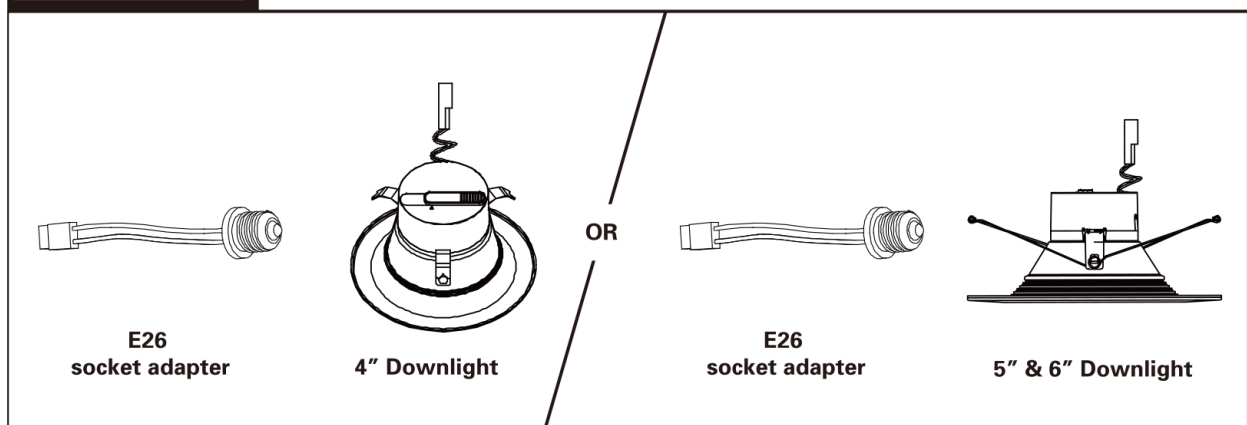

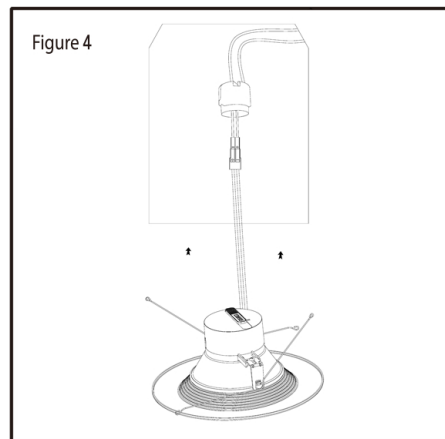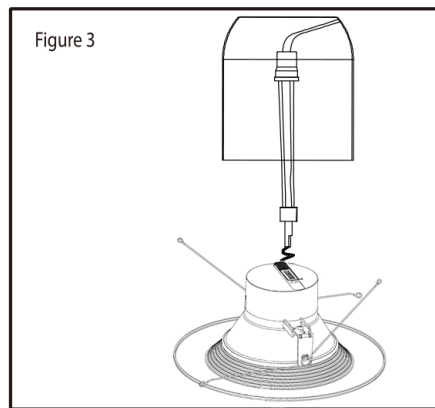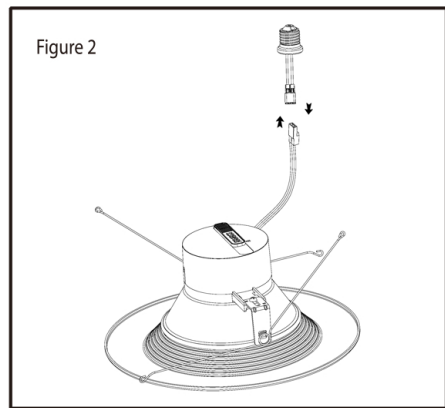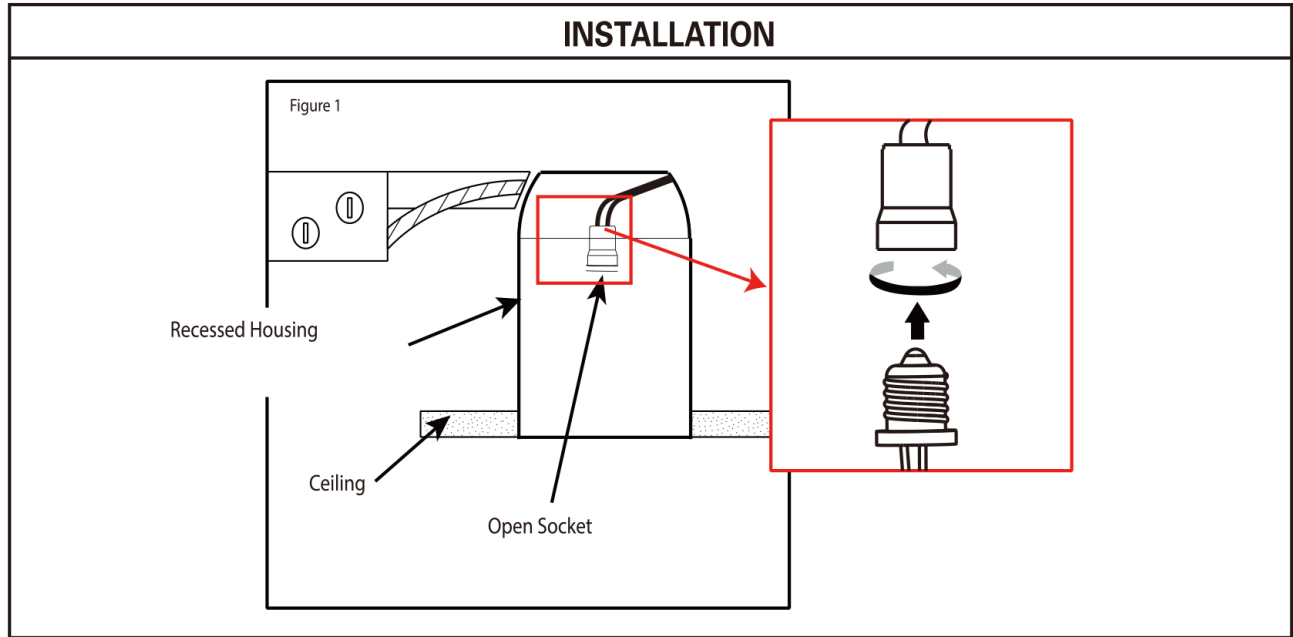

1. Disconnect all power prior to installation
2. Remove the existing trim and bulb to gain access to the socket
3. Screw in the E26 socket adaptor into the open socket.
(Figure 1)
4. Plug in the quick connector. (Figure 2)
5. Once connector is attached, squeeze spring clips and gently push trim into fixture opening until flush with ceiling (Figure 3)
6. (For 5" & 6" Downlights) Unscrew and adjust the plate inward or outward for 5" or 6" diameter