


## PRODUCT DESCRIPTION:

General flood lighting, corridor lighting, security lighting, and roof top lighting. Can also be used as a high bay.

## FEATURES:

- Mercury Free
- No UV
- Flexible, modular design
- Easy Installation
- Daylight Sensor available

## DIMENSIONS:

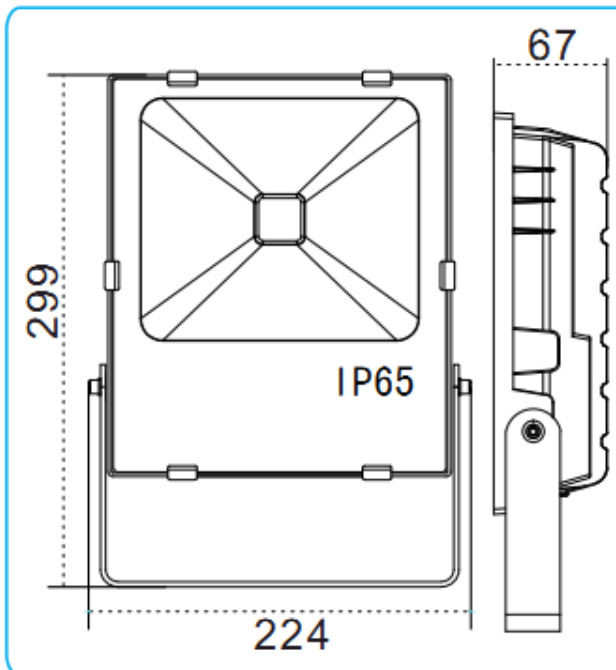

## Flood Light 50W Spec

LOD-FL-50W50K-HL (With Nichia 3030 LED)



### SPECIFICATIONS:

SPECIFICATION	Details
Model	LOD-FL-50W50K-HL (With Nichia 3030 LED)
Input Wattage (W)	50W
Lumens Delivered (LM)	6,200LM
Efficacy (LM/W)	124LM/W
CRI	75
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	100W – 150W
Dimmable	No
IP Rating	IP65
Beam Angle	120
Input Voltage	AC100-277V
Power Factor	0.95
Housing	Aluminum
Lens	Clear
Mounting	Bracket
THD	20%
Size	11.77" x 8.81" x 2.63"
Certification	DLC, ETL
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Environment	Outdoor
Warranty	5 years limited

### OPTIONAL ACCESSORIES:

#### Photocell

