

# W104

## Wall Sconce



### Features

#### Housing

Die-formed Cold-rolled Steel

#### Optical

Shade: High Transmission Acrylic Creates Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

#### Electrical

High Power Factor, Low THD

Option -EM : Built-in Emergency Light and Bi-Level Lighting

#### Lamp

LED Type: Integrate LED Module , 3000K LED

More Color Temperature Option 3500K, 4000K, 5000K

GU24 Type: - CFL Bulb, 2700K or 4000K


- 9W LED Bulb, 3000K or 4000K

#### Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

#### Warranty

5 Years Limited Warranty on Driver and LED

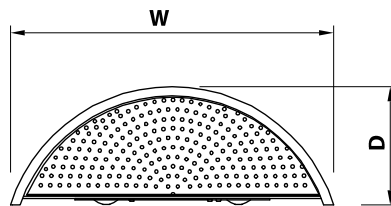

### LED Type

Model	Input Voltage	Input Wattage	LED CT	CRI	Lumen (TYP)	Finish/Shade	Dimension (W x H x D)	Energy Star
W104D-xxxxK	120V	15W	3000K	>80	1100	ORB / Acrylic	10.7" x 11.5" x 4.0"	Yes
W104D-EM-xxxxK	120V	15W	3000K	>80	1100	ORB / Acrylic	10.7" x 11.5" x 4.0"	Yes

### GU24 Type

Model	Input Voltage	Lamp	Finish	Shade	Dimension (W x H x D)	Energy Star
W104-213	120V	2 x 13W GU24 CFL	ORB	Acrylic	10.7" x 11.5" x 4.0"	---