

# W260

## Wall Sconce



### Features

#### Housing

Die-formed Cold-rolled Steel  
 Finish Option: -62 Satin Nickel -30 Oil Rubbed Bronze

#### Optical

Shade: High Transmission Glass Creates Excellent Light Distribution and Uniformity  
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

#### Electrical

High Power Factor, Low THD  
 Option -EM : Built-in Emergency Light and Bi-Level Lighting

#### Lamp


LED Type: Integrate LED Module , 3000K LED  
 More Color Temperature Option 3500K, 4000K, 5000K  
 GU24 Type: - CFL Bulb, 2700K or 4000K  
 - 9W LED Bulb, 3000K or 4000K

#### Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

#### Warranty

5 Years Limited Warranty on Driver and LED

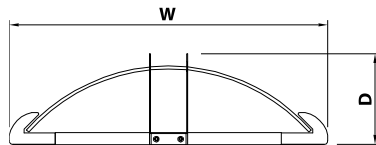

### LED Type

Model	Input Voltage	Input Wattage	LED CT	CRI	Lumen (TYP)	Finish/Shade	Dimension (W x H x D)	Energy Star
W260D-xxxxK	120V	15W	3000K	>80	1150	Satin Nickel / Frosted Glass	16.5" x 9.8" x 4.7"	Yes
W260D-EM-xxxxK	120V	15W	3000K	>80	1160	Satin Nickel / Frosted Glass	16.5" x 9.8" x 4.7"	Yes

### GU24 Type

Model	Input Voltage	Lamp	Finish	Shade	Dimension (W x H x D)	Energy Star
W260-213	120V	2 x 13W GU24	Satin Nickel	Frosted Glass	16.5" x 9.8" x 4.7"	---