

T8-43-96G-R17D-850-DE-BYP



Replace T8 or T12 fluorescent tubes. Double-ended line voltage wiring. Works with shunted and non-shunted sockets - no need to change sockets.

Color: White

Weight: 1.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts	43.00W	Input Voltage	120-277
Color Temp	5000K (Daylight)	Power Factor	0.9
Lumens	5,500	Flicker	N/A
Efficacy	127.9 LPW	THDi	N/A
Color Accuracy	82 CRI	R9	
L70 Accuracy	50,000		

Technical Specifications

Technical Specifications

Product Type:

Linear

Bulb Shape:

T8

Nominal Length:

8FT

Finish:

Frosted

Wattage:

43W

Wattage Equivalency:

59W/54W Fluorescent

Typical Lumen Output:

5500

Efficacy:

128 lm/W

Color Temperature:

5000K Daylight

CRI:

82

Base Type:

R17d

L70 Lifespan:

50,000 hours

Operating Temperature:

-20°C - 45°C

Dimmable:

No

Beam Angle:

240°

Warranty:

5-Year, No-Compromise Warranty

Installation Type:

Type B, Double Ended wiring

For Use in Emergency Fixtures:

No

For Use Outdoors in Open Fixtures:

No

Technical Specifications (continued)

Electrical Characteristics

Input Voltage:

120-277V

Power Factor:

0.9

Operating Frequency:

50 / 60 Hz

THDi:

<20%

Listings

UL Recognized:

Yes

UL Classified:

Yes


NSF Listing:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones

CEC Status:

Lawful for sale in California

Dimensions

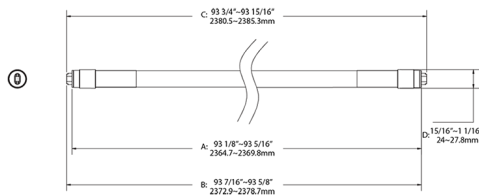

Features

FLUORESCENT REPLACEMENT - Replace conventional fluorescent T8 and T12 linear tubes

EASY TO INSTALL - Simply cut the ballast out, and rewire sockets directly to line voltage

SAVE ENERGY AND MONEY - Provides same output as fluorescent but uses far less energy

SAVE ENERGY AND MONEY - Provides same output as fluorescent but uses far less energy

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

DIFFUSION COATING - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle

BALLAST BYPASS - Internal driver eliminates the need for external ballasts or drivers

INSTANT ON - No warmup time required, full brightness instantly

LOW FLICKER - Less than 5% flicker

MERCURY FREE - Environmentally friendly vs fluorescent technologies

SHUNTED AND NON-SHUNTED - Works on shunted and non-shunted sockets