



SENSORWORX®

# POWER PACK

## INSTALLATION & OPERATION INSTRUCTIONS

CATALOG NUMBERS	DESCRIPTIONS
SWX-900	POWER PACK
SWX-910	SECONDARY RELAY PACK
SWX-900-AX	POWER PACK WITH AUXILIARY SWITCH INPUT
SWX-999	LOW VOLTAGE WIRING CHAMBER

## OVERVIEW

SENSORWORX power packs transform incoming line voltage power to Class 2 low voltage as needed by sensor(s) or other control device(s). Additionally, they switch on/off power to the connected lighting load as directed by the sensors and controls.

## FEATURES

- Powers Low Voltage Sensors
- Switches Line Voltage Loads
- Electronically Timed Switching Ensures Long Relay Life
- Integrated Test/Programming Button
- Optional Snap-On Attachment Provides Chamber for Low Voltage Wire Connections
- Optional Switch Input for Manual On, Hold On, or Hold Off Operations
- Plenum Rated (UL 2043)

## SPECIFICATIONS

### ELECTRICAL

#### OPERATING VOLTAGE

120/277 VAC

#### CLASS 2 OUTPUT RATINGS

18 VDC, 150 mA

#### RELAY CURRENT REQS

55 mA

#### LOAD RATINGS

20A @ 120 V -

General Purpose Plug Load

20A @ 120/277 VAC -

General Purpose, Tungsten, Magnetic Ballast

16A @ 120/277 VAC -

Electronic Ballast, LED Driver

#### DC LOAD RATINGS

20A @ 28 VDC (MAX)

1A @ 5 VDC (MIN)

#### MOTOR LOAD

1 HP

### ENVIRONMENTAL

#### OPERATING TEMP

-10°F to 122°F (14°C to 50°C)

#### RELATIVE HUMIDITY

0-95% Non-Condensing, Indoor Use Only

#### ROHS COMPLIANT

### PHYSICAL

#### SIZE

3.00" H x 2.25" W x 1.88" D  
(7.62 cm x 5.72 cm x 4.78 cm)

#### WEIGHT

6.00 oz.

#### COLOR

Blue

#### MOUNTING

1/2" Knockout




## INSTALLATION INSTRUCTIONS

### MOUNTING INSTRUCTIONS

Power Packs are designed to attach to electrical enclosures with 1/2" knockouts.

### INSTALLATION NOTES

- 1 For supply connections, use 14 AWG (90°C) or larger wires. Wire all circuits exiting chase nipple as Class 1 circuits.
- 2 Suitable for plenum use.
- 3 Risk of Electric Shock - More than one disconnect switch may be required to de-energize the equipment before servicing.

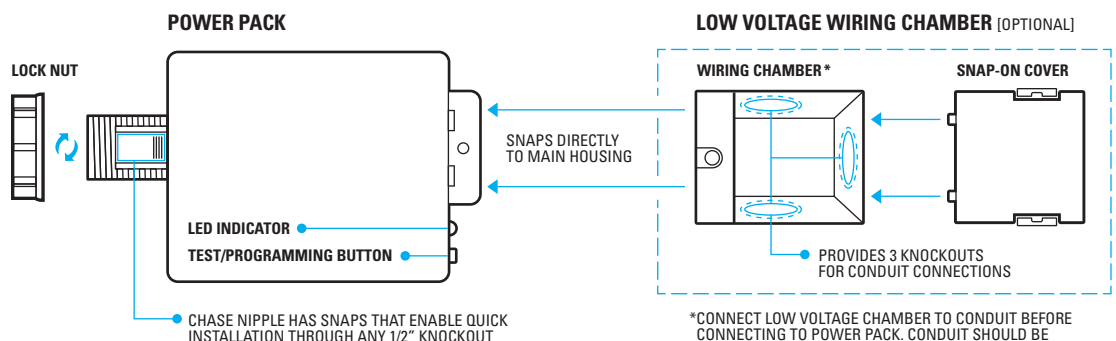


\*CONNECT LOW VOLTAGE CHAMBER TO CONDUIT BEFORE CONNECTING TO POWER PACK. CONDUIT SHOULD BE APPROPRIATELY SUPPORTED BY OTHER MEANS AND NOT USE THE LOW VOLTAGE CHAMBER FOR SUPPORT




# WIRING


## STANDARD WIRING

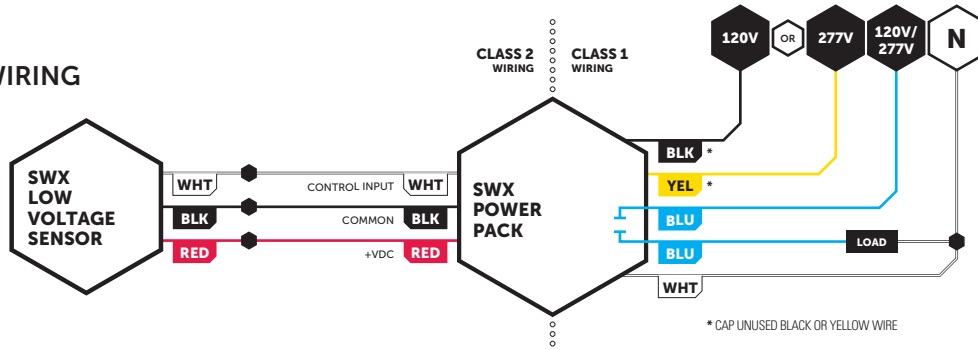

## MULTIPLE SENSOR WIRING

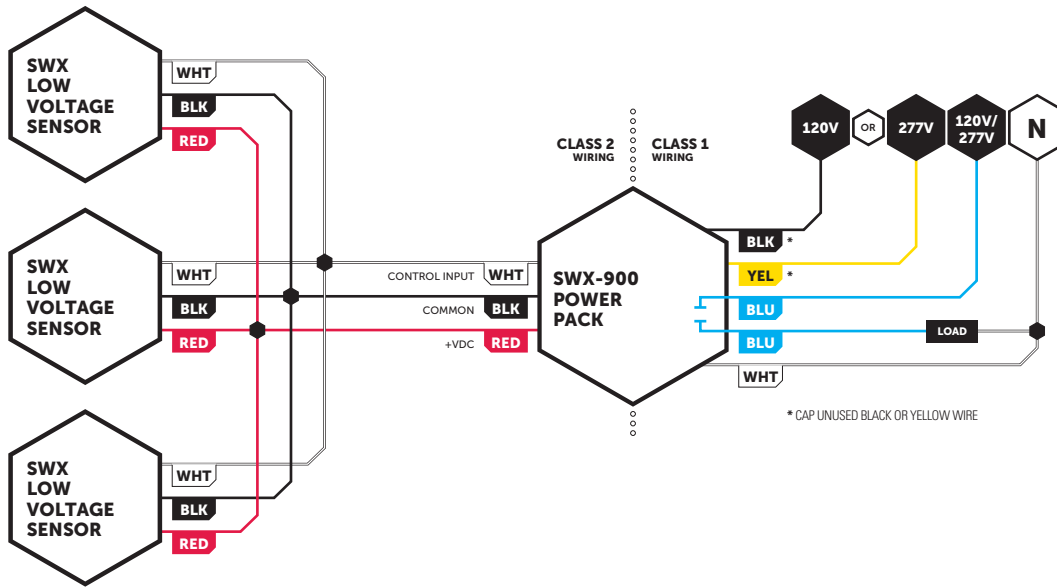


## MULTIPLE POWER PACK WIRING COMMON LINE FEEDS

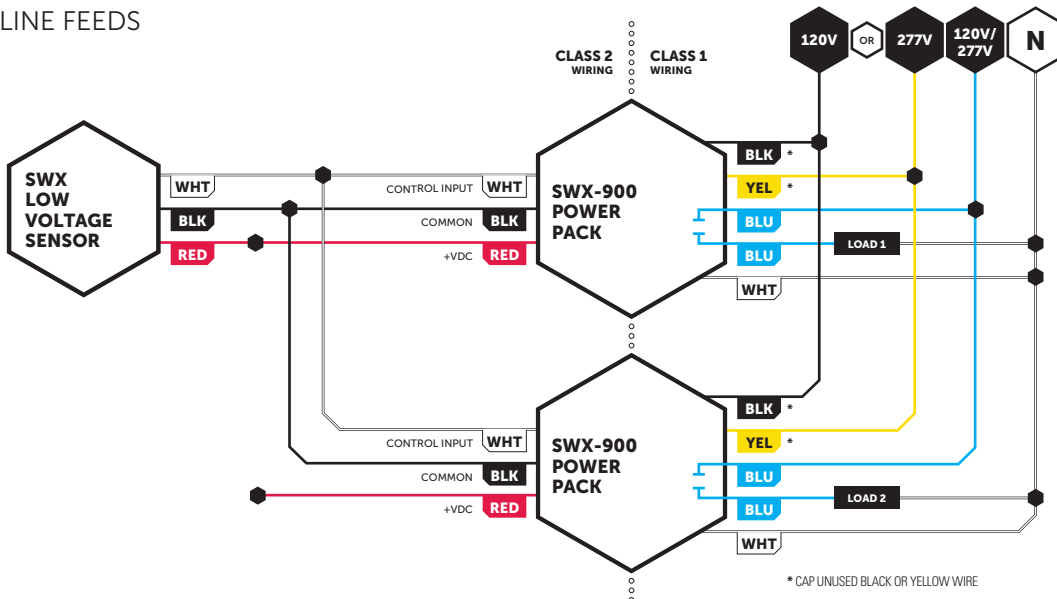


# WIRING CONT.

## MULTIPLE POWER PACK WIRING SEPARATE LINE FEEDS

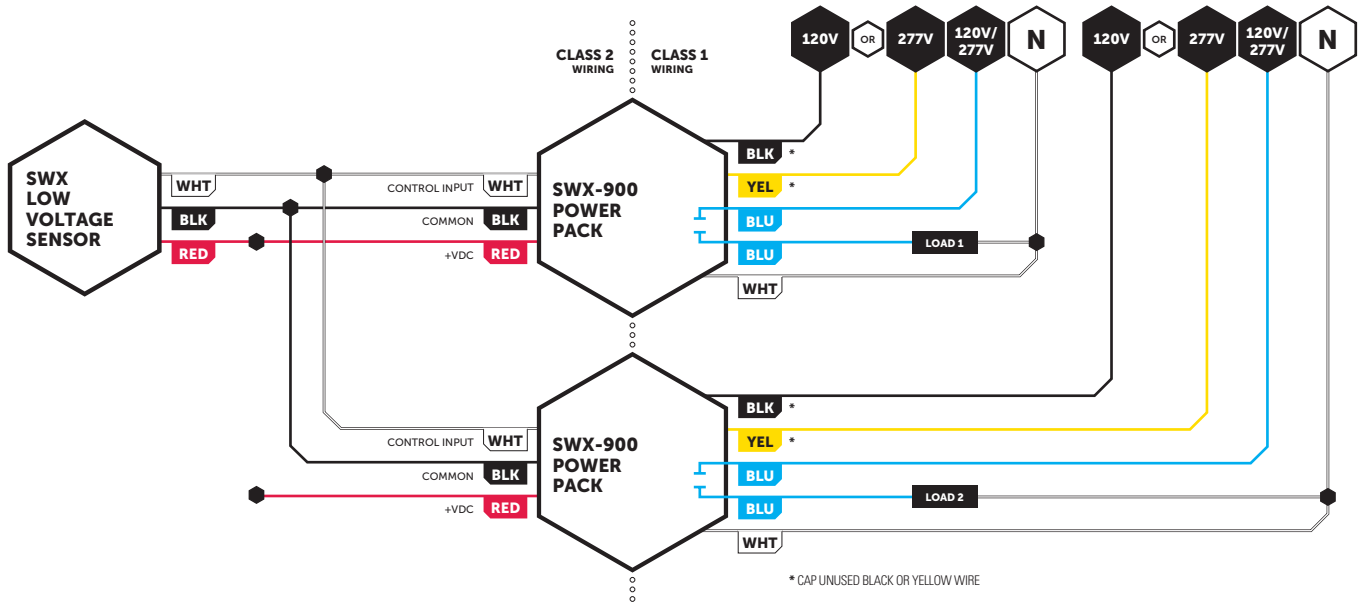

## POWER PACK w/ SECONDARY RELAY PACK WIRING

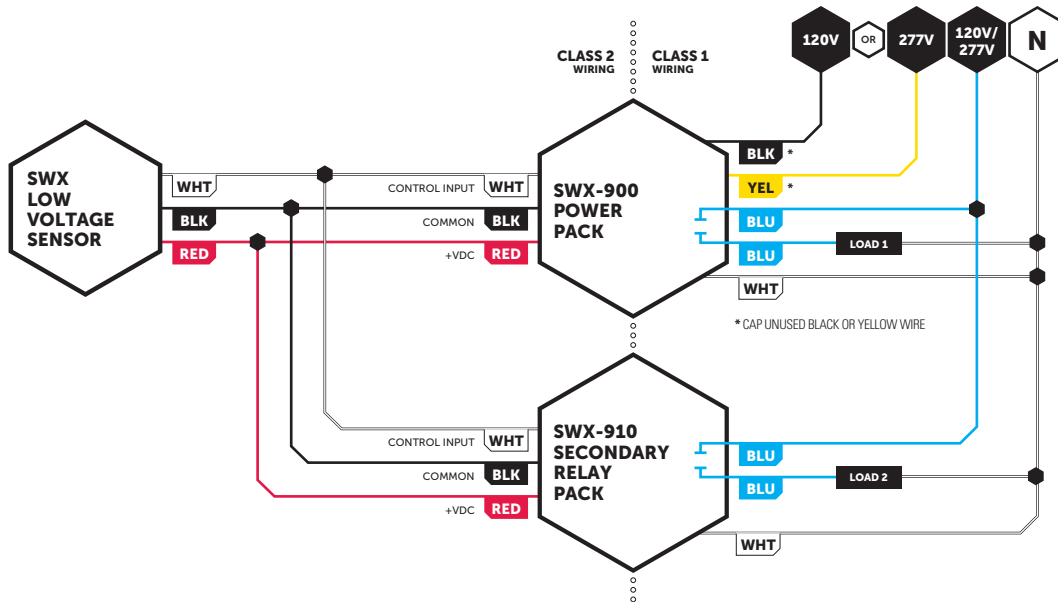


# WIRING CONT.


## POWER PACK CONNECTED TO SWITCH (requires -AX option)

- Some energy codes require Manual On (also called Vacancy) operation where an occupant is required to initially switch on lighting. The sensor then ensures lights are turned off once the space is unoccupied
- Interfacing momentary switches such as the SWX-801-xx or SWX-803-xx are recommended, however maintained switches can also be utilized
- For momentary switches, the power pack will react on the leading edge of a pulse on the brown input wire
- For maintained switches, any change of state on the brown wire that lasts longer than 0.5 seconds will be read by the power pack as one action

### MOMENTARY SWITCH

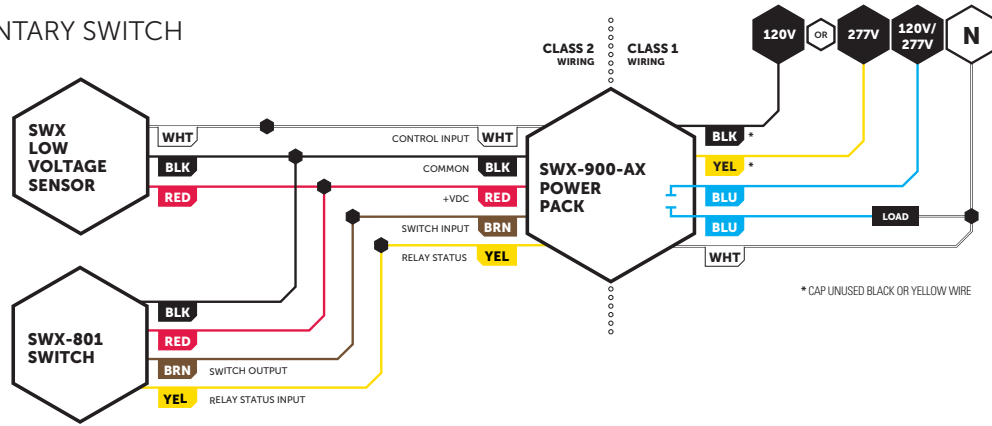


### MAINTAINED SWITCH

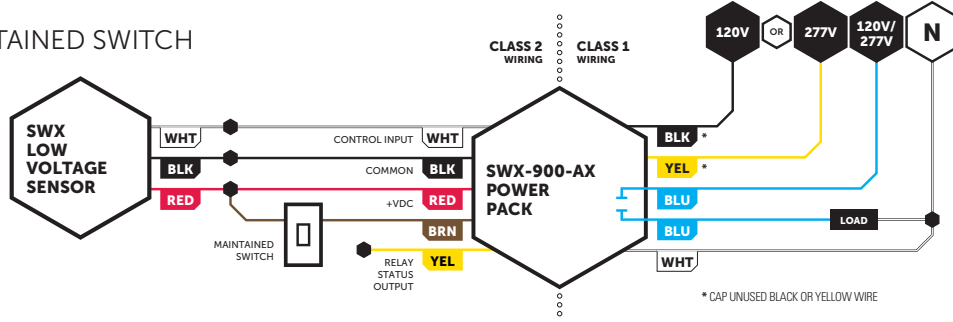

## POWER PACK w/ SWITCH SIGNAL FROM EXTERNAL SYSTEM

- Typical for Hold On and Hold Off applications
- BROWN switch input can be activated by external signals +5VDC or higher (i.e. logic high)
- For hold on and hold off applications, switch input can also be configured to activate on logic low

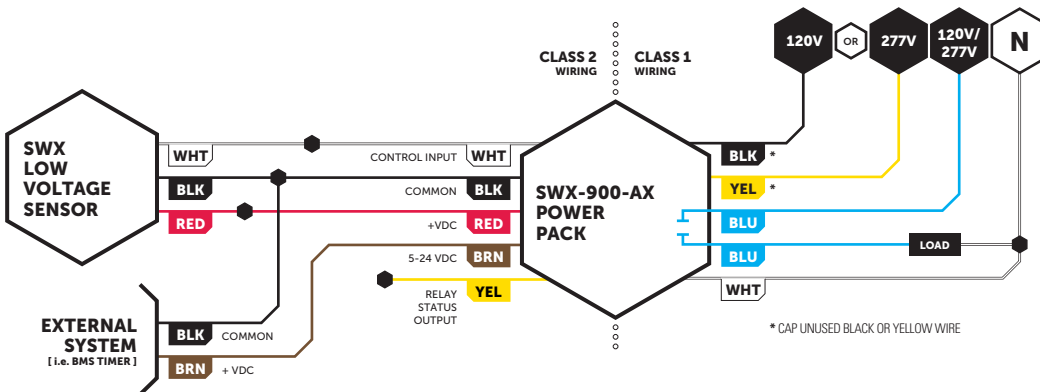

# POWER PACK CAPACITY

**SWX-900** series power packs can supply power to several occupancy sensors and additional secondary relay packs. Following the below formula ensures adequate power will be available. Note the **SWX-900's** relay has already been factored into the formula.

$$[ (\# \text{ of PIR SENSORS}) \times 2 ] + [ (\# \text{ of DUAL TECH SENSORS}) \times 10 ] + [ (\# \text{ of SWX-910}) \times 55 ] < [ (\# \text{ of SWX-900}) \times 95 ]$$

## EXAMPLE COMBINATIONS

PIR SENSORS		+	DUAL TECH SENSORS		+	SECONDARY PACKS SWX-910		=	TOTAL POWER REQUIRED	<	POWER SUPPLIED BY ONE SWX-900
#	POWER REQUIRED		#	POWER REQUIRED		#	POWER REQUIRED				
15	30mA	+	0	0	+	0	0	=	30mA	<	95mA
15	30mA	+	0	0	+	1	55mA	=	85mA	<	95mA
0	0	+	9	90mA	+	0	0	=	90mA	<	95mA
7	14mA	+	8	80mA	+	0	0	=	94mA	<	95mA

# TESTING & TROUBLESHOOTING

## TEST MODE

To test unit by toggling the relay, press and hold pushbutton. LED will turn blue while the button is held. Release button to return to normal operation.

## LED INDICATION

During normal operation, the LED flashes white as a status "heartbeat". If the LED repeatedly double flashes blue, the power supply is overloaded. This is probably due to having too many sensors or secondary relay packs connected. Remove excess low voltage load from the red wire until blinking stops.

## RESET

To restore factory settings, press and release the push-button 3 times, wait 2 seconds, then press and release the push-button 3 times again.

# CONFIGURATION SETTINGS

## OPERATIONAL MODES

Standard power packs (model **SWX-900**) and secondary packs (model **SWX-910**) close their relays automatically when a connected sensor signals occupancy. Versions with the

Auxiliary Switch Input option (e.g. model **SWX-900-AX**) have several additional modes of operation that are listed below. Auto On/Auto Off (Setting #2) is the default mode.

SETTING #	MODE	DESCRIPTION
2	Auto On / Auto Off Mode* (Occupancy Mode)	Lights come on automatically when occupancy is detected and turn off automatically after sensor's time delay expires.
3	Manual On / Auto Off (Vacancy Mode)	Lights must be manually switched on via a connected switch, but turn off automatically after sensor's time delay expires.
4	Disable Switch Input	Disables the auxiliary switch input (brown wire). Unit will operate in Auto On/Auto Off mode.
5	Override On / Logic High	Lights are held on when auxiliary switch input wire is logic high (5-24VDC). Occupancy is ignored.
6	Override On / Logic Low	Lights are held on when auxiliary switch input wire is logic low (< 5VDC). Occupancy is ignored.
7	Override Off / Logic High	Lights are held off when auxiliary switch input wire is logic high (5-24VDC). Occupancy is ignored.
8	Override Off / Logic Low	Lights are held off when auxiliary switch input wire is logic low (< 5VDC). Occupancy is ignored.

## TO CHANGE THE OPERATIONAL MODE

- 1 Read through the above list and note the number of the desired setting
- 2 Press and release the unit's pushbutton twice, then wait 2 seconds. The White LED will blink back the number of the current setting (e.g. 2 = Auto On / Auto Off).
- 3 Press the pushbutton the number times equal to the new desired setting (e.g. 3 = Manual On / Auto Off). The White LED will blink back the new setting as confirmation.
- 4 New setting is saved after White LED blinks confirmation 3 times. If Blue LED double flashes at any time, start process over.

## LED OPERATION

To disable the LED from continuously flashing white as a "heartbeat", press and release the push-button 4 times, wait 2 seconds, then press and release the push-button 4 times again.

## RELAY LOGIC

The power pack's relay closes in response to occupancy being detected. To reverse this logic (such that the relay opens in response to occupancy), press and release the push-button 5 times, wait 2 seconds, then press and release the push-button 3 times again.

## ADDITIONAL OPERATION NOTES

When in Auto-on/Auto-off mode, if lights are manually switched off when there are still occupants in a space (to show a presentation for example), they will remain off until either switched back on manually or the sensor times out once the space is empty.

When in Manual On / Auto Off mode, if the switch is pressed but no occupancy is ever sensed, the lights will come on for 1 minute and then shut off.

## CONFIGURATION QUICK REFERENCE TABLE

FUNCTION	SETTING	DESCRIPTION
2 => Operational Modes	2	Auto-On / Auto Off (Occupancy Mode)
	3	Manual On / Auto Off (Vacancy Mode)
	4	Disable Sensor Input
	5	Override On, Logic High
	6	Override On, Logic Low
	7	Override Off, Logic High
	8	Override Off, Logic Low
	3 => Reset	3
4 => LED Operation	2	LED Enabled
	4	LED Disabled
5 => Relay Logic	2	Normal Relay Logic
	3	Inverted Relay Logic

