

Project Name:	Type:
Part Number:	Date:

PAR30 19.5W HO 277V

FEATURES


- ENERGY STAR certified
- Replaces 75W Halogen & 39W CMH
- Direct line voltage 120-277V - Not compatible with ballasts
- High 8160 candela output
- Powerful light output of 1800 lumens
- Exceptional efficacy 92 LPW in Warm White
- Exceptional color rendering CRI 92
- Even beam distribution
- Not intended for use in totally enclosed fixtures
- Suitable for use in damp locations
- Operating temperature: -4°F / -20°C to +95°F / +35°C
- Rated Lifetime (L70): 50,000hrs
- 5 years limited warranty



SPECIFICATIONS

Product	Model	CCT	Wattage	Lumens	Efficacy (LPW)	Power Factor	Input Voltage	Beam Angle	CBCP (cd)	CRI	Cert.
98206	19.5PAR30HO/930NF25/277V	3000K	19.5	1800	92	≥0.9	120-277V	NF 25°	8160	92	ES
98207	19.5PAR30HO/930FL40/277V	3000K	19.5	1800	92	≥0.9	120-277V	FL 40°	3400	92	ES
98208	19.5PAR30HO/940NF25/277V	4000K	19.5	1800	92	≥0.9	120-277V	NF 25°	8160	92	ES
98209	19.5PAR30HO/940FL40/277V	4000K	19.5	1800	92	≥0.9	120-277V	FL 40°	3400	92	ES

DIMENSION & WEIGHT

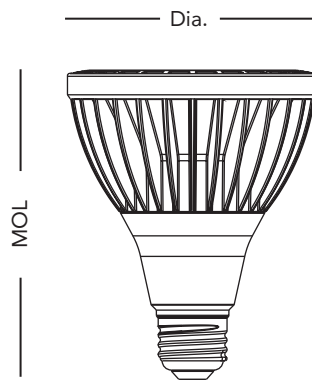


Base	E26
MOL	4.67"(119mm)
Dia.	3.74"(95mm)
Weight	0.89lb / 404g




PAR30 19.5W HO 277V

ILLUMINANCE & CANDELA DISTRIBUTION

19.5PAR30HO/930NF25/277V

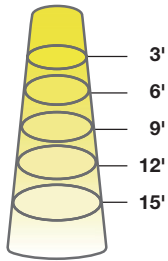


Diameter	Footcandles
1.3	907
2.7	227
4.0	101
5.3	57
6.7	36




Degree	Candela
0	8160
5	6726
15	2339
25	603
35	232
45	94

19.5PAR30HO/930FL40/277V



Diameter	Footcandles
2.2	378
4.4	94
6.6	42
8.7	24
10.9	15



Degree	Candela
0	3400
5	3303
15	2193
25	896
35	258
45	88