

C-WP-A-TRFC Series

Premium LED Wall Pack - Medium
Replaces 150W PSMH/175W MH

C-LITE
LED LIGHTING BY CREE

TRADITIONAL STYLE WITH INCREASED PERFORMANCE!

LED Full Cutoff Wall Pack outperforms traditional 150W PSMH versions by:

- Using up to 60% less energy
- Shining up to 6,600 lumens
- Reducing light pollution



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 6,400, 6,600
- CRI: ≥ 70
- CCT: Neutral White (4000K), Cool White 5000K
- Input Power: 66 Watts
- Dimmable: No
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated 100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 150W PSMH/175W MH

EFFICIENT	FULL CUTOFF	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Reduced power consumption increases energy savings and decreases fixture maintenance	<ul style="list-style-type: none">• Reduced light pollution and sky glow• Allows for control of spill light	<ul style="list-style-type: none">• Building Facades• Perimeter Lighting• Parking Areas & Garages	<ul style="list-style-type: none">• Universal (120V through 277V Operation)

ORDERING INFORMATION

Example: C-WP-A-TRFC-6L-40K-DB

C-WP-A	TRFC	6L		DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	TRFC Premium LED Wall Pack	6L 6,400 Lumens (40K) 6,600 Lumens (50K) 66W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-WP-A-TRFC Series

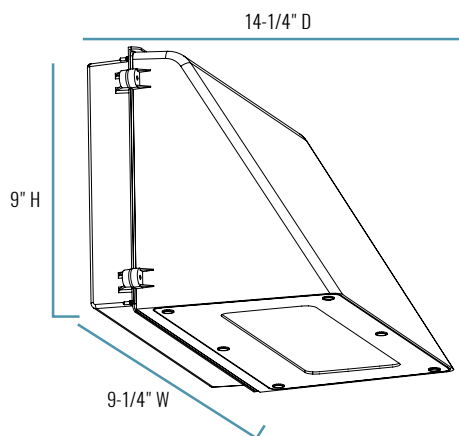

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
9-1/4" D x 14-1/4" W x 9" H	9.02 lbs.	10 to 15 feet	1 to 2 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Low copper, die-cast aluminum housing and door frame Dark bronze polyester powder-coat finish
LENS ASSEMBLY	Tempered glass lens is thermal, shock and impact resistant White polycarbonate reflector
MOUNTING	1/2" threaded knockouts provided for conduit entry (one on top, one on each side) or mount over recessed junction box

ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 100,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.55A	0.32A	0.27A	0.24A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5 Year Limited*	Wet Locations	DLC Qualified

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –
www.p65warnings.ca.gov

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE

C-WP-A-TRFC Series

ACCESSORIES



PHOTOCELL - BUTTON, 120V/208V/240V/277V

SKU: **C-ACC-A-PCCELL-LV** (120V)

C-ACC-A-PCCELL-HV (208V/240V/277V)

USE: Photocell is field installed and drilling of the back box in the field is required.

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Efficiency Forward, Inc.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 10/12/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE