



## Features

- Glass tube with shatter-proof PET coating
- Anti-arcing technology - patented
- Anti-electric shock safety switches - patented
- UL certified for Type A operation with ballast (OOLV #E479597)
- UL certified for Type B operation with line voltage (IFAR #325073)
- Double-end wired on AC (reduces retrofit labor cost by 50%)
- Works with shunted and non-shunted sockets (no need to replace sockets)
- Flicker-free universal driver (110V-277V)

## Specifications

<b>Size</b>	4-ft
<b>Lens Type</b>	Diffused
<b>Ballast</b>	Instant Start
<b>Efficacy</b>	≥ 135 lm/w
<b>Color</b>	3000K, 3500K 4000K, 5000K
<b>CRI</b>	> 80
<b>Input Voltage</b>	110V-277V (50-60Hz)
<b>Operating Temp.</b>	-20°F to 122°F
<b>Power Consumption</b>	4-ft @ 12W (without ballast)
<b>Beam Angle</b>	330°
<b>Warranty</b>	5-year warranty/50,000 hours



### Product Compliance & Certifications:

- UL Type A listed (OOLV/OOLV7 #E479597)
- UL Type B classified (IFAR/IFAR7 #E325073)
- NSF certified
- DLC

## Description

Aleddra is pushing the technology envelope of LED retrofit tubes once again with its new G6 (Generation 6) dual-mode SureFit® LED T8 retrofit tube. The G6 full-glass T8 tube comes with dual safety switches on both end caps, which had been documented by a federal agency to be the most effective means of electric shock protection for an LED T8 tube. The G6 tube also incorporates a patented technology that prevents internal arcing, while minimizing the risk of external arcing when used with a ballast. The shatter-proof coating that has been applied to the G6 tube, adds an additional layer of protection against breakage for both the installer and the end user. Like the previous model, the G6 tube is both Type A / Type B with two UL certificates, one for ballast operation and the other for line voltage operation.

## Wiring Diagram

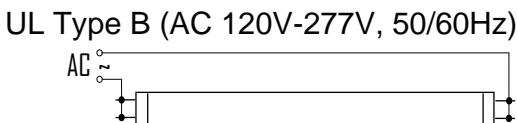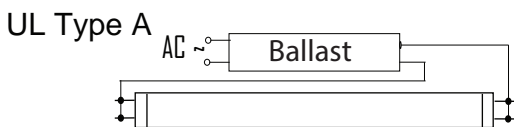

## Ordering Information

Model #	Size	Wattage	Lumen	Color
LLT-4-G-T8-12W-DBA-30K	4-ft	12W	1750lm	3000K
LLT-4-G-T8-12W-DBA-35K	4-ft	12W	1775lm	3500K
LLT-4-G-T8-12W-DBA-40K	4-ft	12W	1800lm	4000K
LLT-4-G-T8-12W-DBA-50K	4-ft	12W	1900lm	5000K