

## Features & Benefits

- Die-Cast Aluminum on Front and Back Housing
- Built-In Level for Easy and Accurate Installation
- Polycarbonate Optical Lens with UV Stabilizers
- Pre-Installed Photocell Button Available
- Ambients from -40 F° to 104° F
- UL Listed for Wet Locations
- 5-Year Limited Warranty



### Housing

Suitable for both indoor and outdoor application, also suitable for J-BOX mounting and surface mounting.

### Photocell

Optional photocell allows for security and energy saving.

### Lens

Polycarbonate optical lens with UV stabilizers no yellow shading or deterioration over years.

### 1/2 inch threaded hole

Three entries can support wires coming from the hole for easier wire connections.



## Technical Parameters

Power	Light Output	Power Input	Operating Temperature	Efficacy
30W - 125W	3,550 lm -15,000 lm	120-277V, 347/480V	-40°F- 104°F	Up to 117 lm/W

Certifications	Photocell	CRI	Color Temperature	Finish
UL, DLC Standard	Button	70 CRI	4000K, 5000K	DB, W, B

## Performance Data

5000K		
LED Watts	Lumens	LPW
30W	3,600 lm	120 lm/W
40W	5,100 lm	128 lm/W
65W	7,900 lm	122 lm/W
90W	10,500 lm	117 lm/W
125W	15,000 lm	120 lm/W

4000K		
LED Watts	Lumens	LPW
30W	3,550 lm	118 lm/W
40W	5,000 lm	125 lm/W
65W	7,800 lm	120 lm/W
90W	10,000 lm	111 lm/W
125W	14,500 lm	116 lm/W




## Ordering Information *Example: WPTCX-65W-50K*

(Optional)

Model	Wattage	Voltage	CCT	Finish	Controls
<b>WPTCX</b> Wall Pack TCX Series	30W 40W 65W 90W 125W	<b>Blank</b> 120-277V <b>HV</b> 347/480V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>Blank</b> Dark Bronze <b>W</b> White <b>B</b> Black	<b>P</b> Photocell


Note:  
1. 30W is Limited to 120-277V Input.

## Product Dimensions

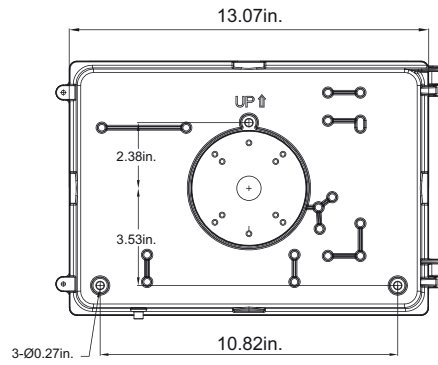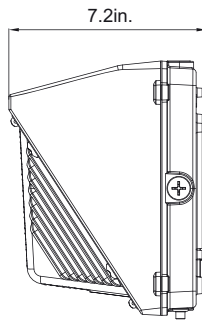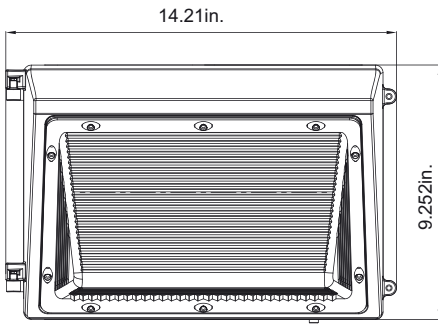

Weight  
 30W: 6.327lb  
 40W: 6.525lb  
 65W: 6.724lb  
 90W: 7.319lb  
 125W: 8.157lb

## Photometrics

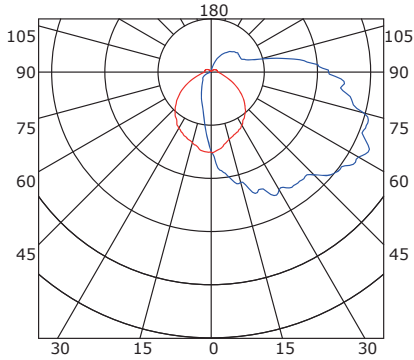

## DLC Listed Models

System Watt	Voltage	CCT	DLC NO	DLC Classification
30W	120-277V	4000K	WPTCX-30W-40K-[Blank]-[Blank,P]	Standard
30W	120-277V	5000K	WPTCX-30W-50K-[Blank]-[Blank,P]	Standard
40W	120-277V	4000K	WPTCX-40W-40K-[Blank]-[Blank,P]	Standard
40W	120-277V	5000K	WPTCX-40W-50K-[Blank]-[Blank,P]	Standard
65W	120-277V	4000K	WPTCX-65W-40K-[Blank][P]	Standard
65W	120-277V	5000K	WPTCX-65W-50K-[Blank][P]	Standard
90W	120-277V	4000K	WPTCX-90W-40K-[Blank][P]	Standard
90W	120-277V	5000K	WPTCX-90W-50K-[Blank][P]	Standard

Note: Only Above Models are Currently DLC Listed