

<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------



**Features and Benefits**

- UL LISTED - For damp locations in enclosed fixtures
- LIFESPAN - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations
- LEDs - On both sides of the tube provides 360-degree light output
- OPTICS - Provide smooth even light without hot spots
- MULTIPLE LENGTHS - Available for any application need
- 120V-277V - Universal voltage
- AMBIENT TEMPERATURE - -20°C/-4°F to 55°C/131°F
- ROTATABLE ENDCAPS - Direct light where you need it
- CONSTRUCTION - Robust plastic and aluminum to minimize breakage
- GREEN TECHNOLOGY - Mercury and UV free. RoHS-compliant components
- INSTALLATION - Double-ended bypass installation for simple install and reduced maintenance costs

Technical Specifications		
<b>Technical Specifications</b>	<b>Wattage:</b>	<b>Dimmable:</b>
<b>Product Type:</b> Linear	15W	No
<b>Material:</b> Plastic and Aluminum	<b>Typical Lumen Output:</b> 1950	<b>Warranty:</b> 5-Year, No-Compromise Warranty
<b>Bulb Shape:</b> T8	<b>Efficacy:</b> 130 lm/W	<b>Installation Type:</b> Type B, Ballast Bypass
<b>Base Type:</b> R17d	<b>Color Temperature:</b> 6500K Daylight Deluxe	<b>For Use in Emergency Fixtures:</b> No
<b>Nominal Length:</b> 3FT	<b>CRI:</b> 80	<b>Accessories:</b> Cable Kit 4FT: <a href="#">ST-4L-CABLE-KIT</a> Cable Kit 6FT: <a href="#">ST-6L-CABLE-KIT</a> Surge Protector Compatibility: <a href="#">SP10KV</a>
<b>Finish:</b> Clear	<b>L70 Lifespan:</b> 50,000 hours	

## Technical Specifications (continued)

### Electrical Characteristics

#### Operating Frequency:

50 / 60 Hz

#### Input Voltage:

120-277V

#### Power Factor:

>0.9

#### THDi:

<20%

### Listings

#### UL Listed:

Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.

#### CEC Status:

Lawful for sale in California

### Application:

Suitable for damp locations and totally enclosed fixtures.



### Other

:

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
<b>CASE</b>	10	7.7	3	39.2
<b>PALLET</b>	660	39.4	43.3	47.2

## Wiring Diagram

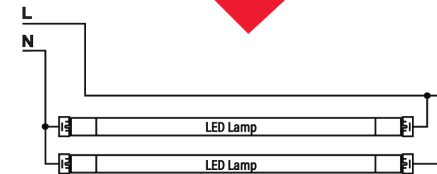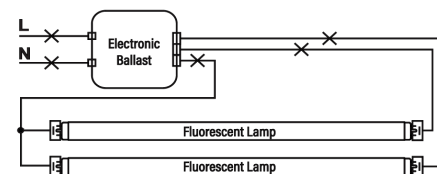

## Dimension

