

Project:

Type:

Prepared By:

Date:



UPC: 019813510200



Features and Benefits

UL LISTED - For damp locations in enclosed fixtures

LIFESPAN - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations

LEDs - On both sides of the tube provides 360-degree light output

OPTICS - Provide smooth even light without hot spots

MULTIPLE LENGTHS - Available for any application need

120V-277V - Universal voltage

AMBIENT TEMPERATURE - -20°C/-4°F to 55°C/131°F

ROTATABLE ENDCAPS - Direct light where you need it

CONSTRUCTION - Robust plastic and aluminum to minimize breakage

GREEN TECHNOLOGY - Mercury and UV free. RoHS-compliant components

INSTALLATION - Double-ended bypass installation for simple install and reduced maintenance costs

Technical Specifications

Technical Specifications

Product Type:

Linear

Material:

Plastic and Aluminum

Bulb Shape:

T8

Base Type:

R17d

Nominal Length:

4FT

Finish:

Clear

Wattage:

19.5W

Typical Lumen Output:

2600

Efficacy:

133 lm/W

Color Temperature:

6500K Daylight Deluxe

CRI:

80

L70 Lifespan:

50,000 hours

Dimmable:

No

Warranty:

5-Year, No-Compromise Warranty

Installation Type:

Type B, Ballast Bypass

For Use in Emergency Fixtures:

No

Accessories:

Cable Kit 4FT: [ST-4L-CABLE-KIT](#)

Cable Kit 6FT: [ST-6L-CABLE-KIT](#)

Surge Protector Compatibility: [SP10KV](#)

Technical Specifications (continued)

Electrical Characteristics

Operating Frequency:

50 / 60 Hz

Input Voltage:

120-277V

Power Factor:

>0.9

THDi:

<20%

Listings

UL Listed:

Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.

CEC Status:

Lawful for sale in California

Application:

Suitable for damp locations and totally enclosed fixtures.



Other

:

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	10	7.7	3	51.2
PALLET	550	39.4	43.3	51.2

Wiring Diagram

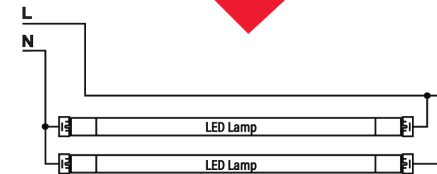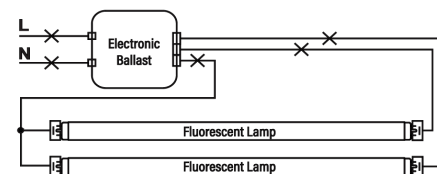

Dimension

