

Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



Features and Benefits

- UL LISTED - For damp locations in enclosed fixtures
- LIFESPAN - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations
- LEDs - On both sides of the tube provides 360-degree light output
- OPTICS - Provide smooth even light without hot spots
- MULTIPLE LENGTHS - Available for any application need
- 120V-277V - Universal voltage
- AMBIENT TEMPERATURE - -20°C/-4°F to 55°C/131°F
- ROTATABLE ENDCAPS - Direct light where you need it
- CONSTRUCTION - Robust plastic and aluminum to minimize breakage
- GREEN TECHNOLOGY - Mercury and UV free. RoHS-compliant components
- INSTALLATION - Double-ended bypass installation for simple install and reduced maintenance costs

Technical Specifications		
Technical Specifications	Wattage:	Dimmable:
Product Type: Linear	39.5W	No
Material: Plastic and Aluminum	Typical Lumen Output: 5200	Warranty: 5-Year, No-Compromise Warranty
Bulb Shape: T8	Efficacy: 131 lm/W	Installation Type: Type B, Ballast Bypass
Base Type: R17d	Color Temperature: 6500K Daylight Deluxe	For Use in Emergency Fixtures: No
Nominal Length: 8FT	CRI: 80	Accessories: Cable Kit 4FT: ST-4L-CABLE-KIT Cable Kit 6FT: ST-6L-CABLE-KIT Surge Protector Compatibility: SP10KV
Finish: Clear	L70 Lifespan: 50,000 hours	

Technical Specifications (continued)

Electrical Characteristics

Operating Frequency:

50 / 60 Hz

Input Voltage:

120-277V

Power Factor:

>0.9

THDi:

<20%

Listings

UL Listed:

Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.

CEC Status:

Lawful for sale in California

Application:

Suitable for damp locations and totally enclosed fixtures.



Other

:

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	10	7.7	2.9	97.8
PALLET	550	40.2	42.5	98.4

Wiring Diagram

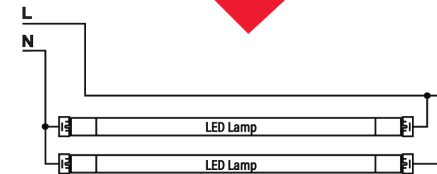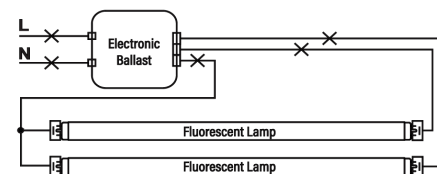

Dimension

