

| | | | |
|-----------------|--------------|---------------------|--------------|
| Project: | Type: | Prepared By: | Date: |
|-----------------|--------------|---------------------|--------------|



Features and Benefits

- UL LISTED - For damp locations in enclosed fixtures
- LIFESPAN - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations
- LEDs - On both sides of the tube provides 360-degree light output
- OPTICS - Provide smooth even light without hot spots
- MULTIPLE LENGTHS - Available for any application need
- 120V-277V - Universal voltage
- AMBIENT TEMPERATURE - -20°C/-4°F to 55°C/131°F
- ROTATABLE ENDCAPS - Direct light where you need it
- CONSTRUCTION - Robust plastic and aluminum to minimize breakage
- GREEN TECHNOLOGY - Mercury and UV free. RoHS-compliant components
- INSTALLATION - Double-ended bypass installation for simple install and reduced maintenance costs

| Technical Specifications | | |
|--|--|--|
| Technical Specifications | Wattage: | Dimmable: |
| Product Type: Linear | 43W | No |
| Material: Plastic and Aluminum | Typical Lumen Output: 5850 | Warranty: 5-Year, No-Compromise Warranty |
| Bulb Shape: T8 | Efficacy: 136 lm/W | Installation Type: Type B, Ballast Bypass |
| Base Type: R17d | Color Temperature: 6500K Daylight Deluxe | For Use in Emergency Fixtures: No |
| Nominal Length: 9FT | CRI: 80 | Accessories: Cable Kit 4FT: ST-4L-CABLE-KIT Cable Kit 6FT: ST-6L-CABLE-KIT Surge Protector Compatibility: SP10KV |
| Finish: Clear | L70 Lifespan: 50,000 hours | |

Technical Specifications (continued)

Electrical Characteristics

Operating Frequency:

50 / 60 Hz

Input Voltage:

120-277V

Power Factor:

>0.9

THDi:

<20%

Listings

UL Listed:

Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.

CEC Status:

Lawful for sale in California

Application:

Suitable for damp locations and totally enclosed fixtures.



Other

:

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|---------------|-----|-------------|------------|-------------|
| CASE | 10 | 7.7 | 2.9 | 111.2 |
| PALLET | 550 | 43.3 | 42.5 | 113.8 |

Wiring Diagram

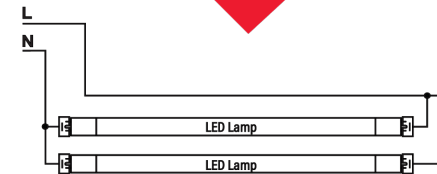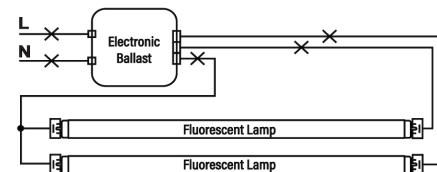

Dimension

