


Project: Type: Prepared By: Date:

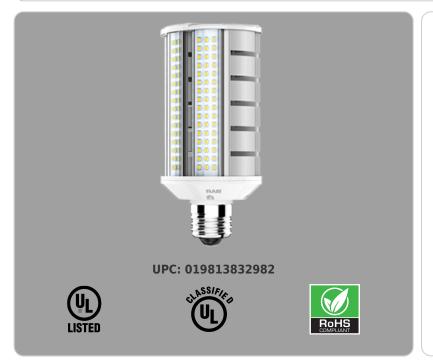

Features and Benefits

HID REPLACEMENT - Replace conventional HID lamps

 $\ensuremath{\mathsf{BALLAST}}$ BYPASS - Internal driver eliminates the need for external driver or ballast

COMPACT DESIGN - Allows the lamp to fit in most fixtures

 $\ensuremath{\mathsf{INSTALLATION}}$ ORIENTATION - Lamps can be installed universally: base up, down or sideways

HEAT DISSIPATION - Thermal technology extends lifespan

WATER & DUST RESISTANT - Ideal for outdoor fixtures

 $\ensuremath{\mathsf{ENCLOSED}}$ FIXTURE RATED - May be used in enclosed and open fixtures

ENERGY SAVINGS - Uses 76% less energy than traditional lamps

MERCURY FREE - Environmentally friendly vs fluorescent technologies

350° ROTATABLE BASE - Direct light where needed

Technical Specifications

Technical Specifications

Product Type:

HID

Bulb Shape:

Wall Pack

Wattage:

30W

Wattage Equivalency:

150W HID

Typical Lumen Output:

4650

Efficacy: 155 lm/W

4000K Cool White

Color Temperature:

CRI:

80

Base Type:

E26

L70 Lifespan:

50,000 hours

Operating Temperature:

-30°C - 60°C

Dimmable:

No

Beam Angle:

180°

Warranty:

5-Year, No-Compromise Warranty

Installation Type:

Type B, Ballast Bypass

Installation Orientation:

Universal Installation

For Use in Emergency Fixtures:

No



Technical Specifications (continued)

Technical Specifications Input Current @ 120V: UL Classified:

For Use Outdoors in Open Fixtures: 0.3mA Yes

No Flicker: DLC Product Code:
Electrical Characteristics <30% NO DLC CATEGORY

Input Voltage: THDi: CEC Status:

100-277V <20% Lawful for sale in California

Power Factor: Listings Other

>0.9 UL Listed:

Operating Frequency: Yes

50 / 60 Hz

Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity	
8.0 x 8.0 x 11.0	1	

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	16.7	12.7	10
PALLET	288	44.6	35.4	39.4

Wiring Diagram

