

**Project:**

**Type:**

**Prepared By:**

**Date:**



UPC: 019813834511



## Features and Benefits

**BALLAST COMPATIBLE** - Uses existing ballast

**INSTANT ON** - No warm-up time required

**HIGH EFFICACY** - Provides same output as fluorescent, but uses far less energy

**50,000-HOUR LIFESPAN** - Lasts 2-3X longer than conventional lamps

**MERCURY FREE** - Environmentally friendly vs fluorescent technologies

**ENCLOSED FIXTURE RATED** - May be used in both enclosed and open fixtures

## Technical Specifications

### Technical Specifications

**Product Type:**

Compact

**Bulb Shape:**

PLT-H

**Finish:**

Frosted

**Wattage:**

16WW

**Wattage Equivalency:**

42WW Fluorescent

**Typical Lumen Output:**

1850

**Efficacy:**

115 lm/W

**Color Temperature:**

5000K Daylight

**CRI:**

82

**Base Type:**

GX24q

**L70 Lifespan:**

50,000 hours

**Operating Temperature:**

-20°C - 45°C

**Dimmable:**

No

**Beam Angle:**

111°

**Warranty:**

5-Year, No-Compromise Warranty

**Installation Type:**

Type A, Plug and Play

**Installation Orientation:**

Horizontal

## Technical Specifications (continued)

### Technical Specifications

#### For Use in Emergency Fixtures:

No

#### For Use Outdoors in Open Fixtures:

No

### Electrical Characteristics

#### Input Voltage:

Ballast Dependent

#### Power Factor:

Ballast Dependent

#### Operating Frequency:

Ballast Dependent

#### Input Current @ 120V:

Ballast Dependent

#### Input Current @ 277V:

Ballast Dependent

### Listings

#### UL Listed:

Yes

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

#### DLC Model Number:

T10094

#### DLC Product Code:

PHRMGPTT

#### CEC Status:

Lawful for sale in California

#### Application:

Suitable for damp locations and totally enclosed fixtures.


#### Other

:

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	20	9.8	7.9	7.5
PALLET	2880	46.9	39.4	49.2

## Dimension

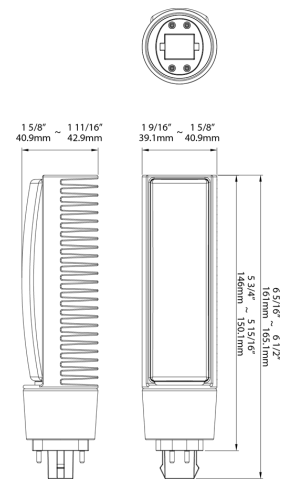

## Light Distribution

