

**Project:**

**Type:**

**Prepared By:**

**Date:**



UPC: 019813834672



## Features and Benefits

**BALLAST BYPASS** - Reduces maintenance costs

**HYBRID** - Works with or without ballast

**HIGH EFFICACY**- Provides same output as fluorescent, but uses far less energy

**50,000-HOUR LIFESPAN** - Lasts 2-3X longer than conventional lamps

**MERCURY FREE** - Environmentally friendly vs fluorescent technologies

## Technical Specifications

### Technical Specifications

**Product Type:**

Compact

**Bulb Shape:**

PLS

**Finish:**

Frosted

**Wattage:**

5W

**Wattage Equivalency:**

13W Fluorescent

**Typical Lumen Output:**

500

**Efficacy:**

100 lm/W

**Color Temperature:**

5000K Daylight

**CRI:**

82

**Base Type:**

Gx23

**L70 Lifespan:**

50,000 hours

**Operating Temperature:**

-20°C - 45°C

**Dimmable:**

No

**Beam Angle:**

150°

**Warranty:**

5-Year, No-Compromise Warranty

**Installation Type:**

Hybrid, Works with or without Ballast

**Installation Orientation:**

Horizontal

## Technical Specifications (continued)

### Technical Specifications

**For Use in Emergency Fixtures:**

No

**For Use Outdoors in Open Fixtures:**

No

### Electrical Characteristics

**Power Factor:**

>0.9

**Operating Frequency:**

Ballast Dependent or 50/60 Hz

**Input Current @ 120V:**

52mA

**Input Current @ 277V:**

24mA

**Flicker:**

≤30%

**Listings**

**UL Listed:**

Yes

**UL Classified:**

Yes

**CEC Status:**

Lawful for sale in California

**Application:**

Suitable for damp locations and totally enclosed fixtures.



**Other**

:


## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
<b>CASE</b>	25	7.1	5.5	6.7
<b>PALLET</b>	7875	47.2	39.3	49.2

## Wiring Diagram

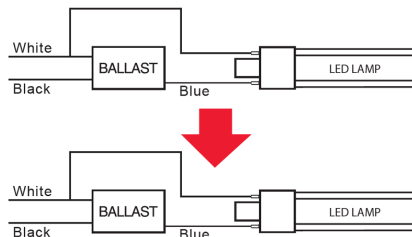

## Dimension

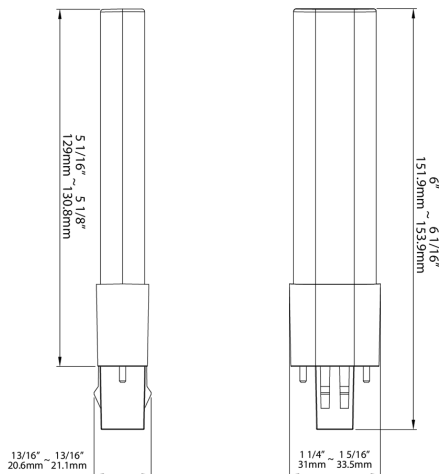

## Light Distribution

