

Project \_\_\_\_\_  
 Schedule \_\_\_\_\_ Date \_\_\_\_\_  
 Notes \_\_\_\_\_

**DESCRIPTION**

naturaLED<sup>®</sup> Bullet Flood light (BFS) delivers exceptional illumination performance to landscape and security lighting. Our Bullet Flood light provides beam angle distribution of 40°, efficacy of 80 LPW, rated IP65, and comes with 1/2" NPT knuckle mount. Creating bright, security and spot lighting for a variety of applications such as perimeter, entryway, facades, landscapes, retail and residential complexes and architectural lighting.



**FEATURES**

- DLC Standard
- IP65 rated
- ETL Rated
- Long Life LED chips
- Uniform and consistent color
- Excellent thermal design
- 1/2" NPT threaded knuckle mount
- Die-cast aluminum housing and plastic
- Beam Angle 40°
- Voltage: 120-277V
- Voltage Frequency (Hz): 50/60
- THD<20%
- Power Factor >0.9
- CRI: 80
- Operating temperature: -22°F ~ 122°F
- Rated 50,000 hours average life

**APPLICATIONS**

- Security Lighting
- Architectural Lighting
- Perimeter Lighting
- Entryway
- Pathway
- Landscape Lighting

**WARRANTY**

- 5 Year Warranty

**COLOR**



Bronze


Ordering Information		EXAMPLE: LED-FXBFS10/40/830/BZ-KNC					
LED	FX	BFS	10	40	830	BZ	KNC
LED	Category FX Fixture	Series BFS Bullet Floodlight	Wattage 10 10W	Beam Angle 40 40°Beam Angle	CRI/Color Temp 8 CRI 80 30 3000K	Color BZ Bronze	Accessory KNC Knuckle

**ORDERING**

\*S = Standard / P = Premium

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Voltage	Knuckle	Rated Hrs	IP65 Rated	DLC (S/P)
10	9291	LED-FXBFS10/40/830/BZ-KNC	3000K	1,137	75	120-277V	1/2"	50,000	•	S
10	9292	LED-FXBFS10/40/850/BZ-KNC	5000K	1,167	75	120-277V	1/2"	50,000	•	S
21	9293	LED-FXBFS20/40/830/BZ-KNC	3000K	2,291	150	120-277V	1/2"	50,000	•	S
21	9294	LED-FXBFS20/40/850/BZ-KNC	5000K	2,373	150	120-277V	1/2"	50,000	•	S

**SPECIFICATIONS**

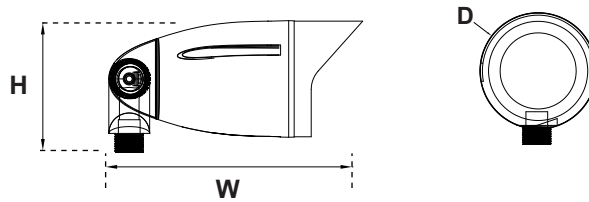

Wattage	Width (W)	Depth (D)	Height	Weight
10W	7.36" (187mm)	3.38" (86mm)	3.81" (97mm)	1.39-lbs
20W	7.36" (187mm)	3.38" (86mm)	3.81" (97mm)	1.39-lbs


**PHOTOMETRICS CHART**

**PACKAGE**

Master: 10 pcs

**FXBFS10**

DLC

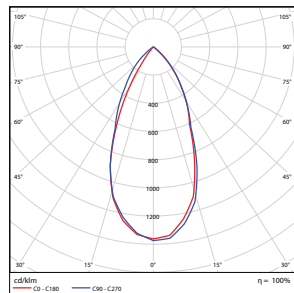


Center Beam fc	Beam Width	
2.5R	215 fc	2.2 ft 2.2 ft
5.0R	53.7 fc	4.4 ft 4.5 ft
7.5R	23.9 fc	6.6 ft 6.7 ft
10.0R	13.4 fc	8.7 ft 9.0 ft
12.5R	8.60 fc	10.9 ft 11.2 ft
15.0R	5.97 fc	13.1 ft 13.4 ft

■ Vert. Spread: 47.2°  
■ Horiz. Spread: 48.3°

**FXBFS20**

DLC

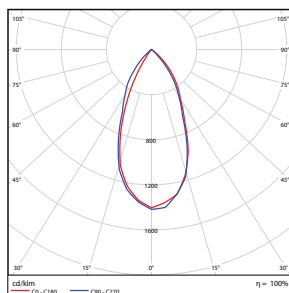

Center Beam fc	Beam Width	
2.5R	420 fc	2.2 ft 2.2 ft
5.0R	105 fc	4.3 ft 4.4 ft
7.5R	46.7 fc	6.5 ft 6.5 ft
10.0R	26.3 fc	8.6 ft 8.7 ft
12.5R	16.8 fc	10.8 ft 10.9 ft
15.0R	11.7 fc	12.9 ft 13.1 ft

■ Vert. Spread: 46.6°  
■ Horiz. Spread: 47.1°

