

Project	
Schedule	Date
Notes	

DESCRIPTION

naturalLED[®] Decorative Accent fixtures feature a soft white light, created by a diffused acrylic lens, and a nickel finished trim. This dimmable fixture has 50,000 hours average rated life, is available in a 12” and 24” size, and can be mounted horizontally or vertically.

Our Decorative Accent fixture can be in used in residential, commercial, hospitality, office buildings and many other applications, making it a perfect energy saving and low maintenance LED solution.



FEATURES


- Energy Star Qualified
- For damp location
- Up to 80% energy savings
- Instant on
- Light weight
- Contains no mercury or lead
- UV Coated Frosted Polycarbonate
- 50,000 hrs rated average life
- Input line voltage: 120V
- Power Factor: >0.9
- CRI: 80
- Dimmable
- Operating temperature: -4°F - 104°F
- Finish: Nickel
- Optional Pull Chain / Toggle Switch

ACCESSORIES

Pull Chain



Toggle Switch

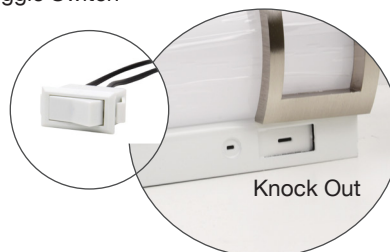

Knock Out

APPLICATIONS

- Bathroom Lighting
- Over Mirror Lighting
- Accent Lighting
- Residential Lighting
- Hospitality

WARRANTY


- 5 Year Warranty

Ordering Information		EXAMPLE: LED-FXDAL23/12FR/830/NI				
LED	FX	DAL	23	12FR	830	NI
LED	Category	Series	Wattage	Size/ Lens	CRI/Color Temp	Finish
	FX	DAL	23 23 Watt	12 12-inch	8 CRI 80	NI Nickel
	Fixture	Decorative Accent		FR Frosted	30 3000K	

ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Size	Equiv. Wattage (W)	Rated Hrs	Damp Location	Energy Star
23	7018	LED-FXDAL23/12FR/830/NI	3000K	1,610	12-inch	150W	50,000	•	•
23	7019	LED-FXDAL23/12FR/840/NI	4000K	1,610	12-inch	150W	50,000	•	•
23	7020	LED-FXDAL23/24FR/830/NI	3000K	2,000	24-inch	200W	50,000	•	•
23	7021	LED-FXDAL23/24FR/840/NI	4000K	2,000	24-inch	200W	50,000	•	•

SPECIFICATIONS

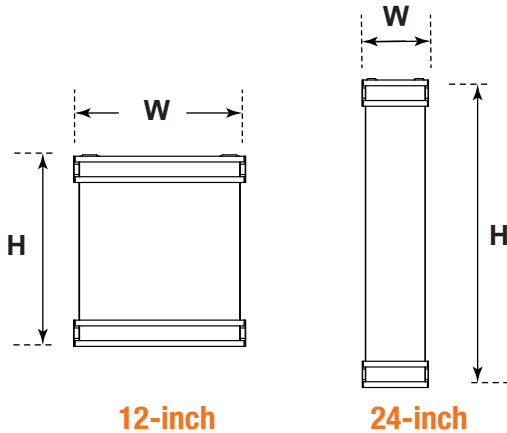


Size	Width (W)	Height (H)	Weight (lbs)
12-inch	9.45" (240mm)	12" (305mm)	2.75
24-inch	4.98" (127mm)	24" (609mm)	4.41

MOUNTING / ACCESSORIES

SOLD SEPARATELY

Pull Chain

- P10077 SWCH-ZE109-NI (Pull String Switch-Nickel)




Switch

- P10078 SWCH-ZE204A (Toggle Switch)



PHOTOMETRICS CHART


12-inch (23 Watt)



Center Beam (c)	Beam Width (W)
5.0ft	1.51 ft 16.5 ft 20.9 ft
10.0ft	0.38 ft 33.1 ft 41.8 ft
15.0ft	0.17 ft 49.6 ft 62.8 ft
20.0ft	0.09 ft 66.2 ft 83.7 ft
25.0ft	0.06 ft 82.7 ft 104.6 ft
30.0ft	0.04 ft 99.3 ft 125.5 ft

Vert. Spread: 117.7°
HORIZ. Spread: 128.9°

24-inch (23 Watt)



Center Beam (c)	Beam Width (W)
5.0ft	0.09 ft 11.8 ft 47.2 ft
10.0ft	0.02 ft 23.5 ft 94.4 ft
15.0ft	0.01 ft 35.3 ft 141.6 ft
20.0ft	0.01 ft 47.0 ft 188.9 ft
25.0ft	0.00 ft 58.8 ft 236.1 ft
30.0ft	0.00 ft 70.6 ft 283.3 ft

Vert. Spread: 99.0°
HORIZ. Spread: 156.1°

PACKAGE

Master Pack: 2 pcs

