


Project \_\_\_\_\_  
 Schedule \_\_\_\_\_ Date \_\_\_\_\_  
 Notes \_\_\_\_\_

**DESCRIPTION**

Introducing our ultra-low profile selectable CCT LED downlight with matte white flange and die-cast aluminum construction for durability. This down slim light can accommodate dimmable LED lamp for delivering a light output up to 800-Lumens with 3000K to 5000K color temperature and 90 CRI. Both round and square downlight has a trim of 4-inch and 6-inch with high impact diffused lens shade for even light distribution. It is suitable for damp locations.

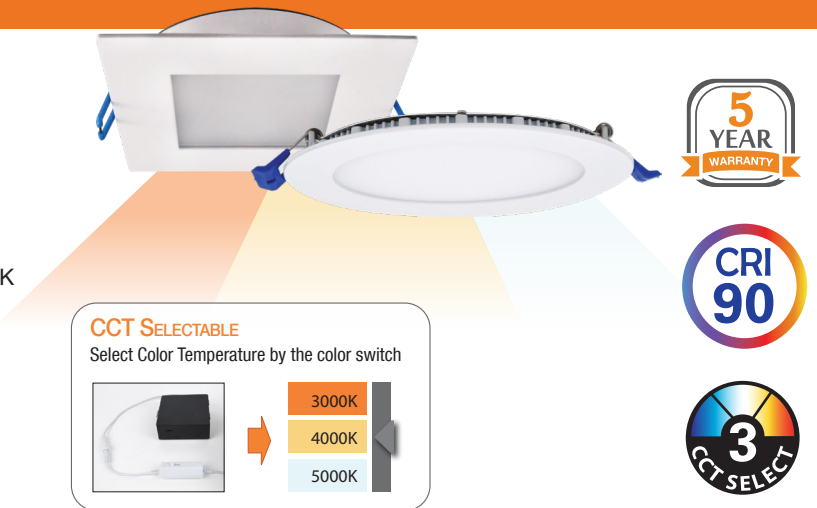

**FEATURES**


- Energy Star Qualified
- Suitable for Damp Location
- IC Rated
- ETL rated
- JA8/Title 24
- Selectable Color Temperature (3000K, 4000K, 5000K)
- Dimmable
- Recommended ceiling height: 9-10ft
- Ultra slim design for dry wall (No recessed can needed)
- 4" / 6" round or square design
- Input Voltage: 120V
- Input current: 0.082A
- Power factor: >0.9
- Beam angle: 120° (Flood)
- CRI: 90
- Operating temperature: -4°F - 113°F

**EASY INSTALLATION**

Snap-in mounting springs and easy wiring access for quick installation



**STYLES**

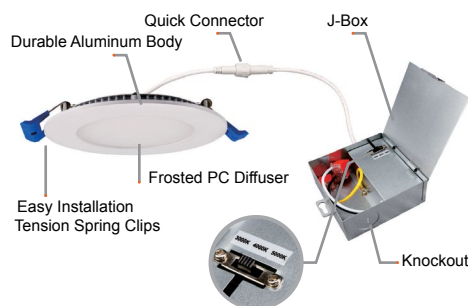

**APPLICATIONS**

- Kitchen Lighting
- Decoration Lighting
- Hallway Lighting
- Bedroom Lighting
- Ceiling Mount Lighting

**WARRANTY**

- 5 Year Warranty

**CCT SELECT**





| Ordering Information |          | EXAMPLE: LED4DLR-60L9CCT3 |                        |                 |                 |                             |
|----------------------|----------|---------------------------|------------------------|-----------------|-----------------|-----------------------------|
| LED                  | 4        | DLR / DLS                 |                        | 60L             | 9               | CCT3                        |
| LED                  | Diameter | Series                    |                        | Lumens          | CRI             | CCT Selectable              |
|                      | 4 4-inch | <b>DLR</b>                | Slim Down Light Round  | <b>60L</b> 600+ | <b>9</b> CRI 90 | <b>CCT3</b> 3000/4000/5000K |
|                      | 6 6-inch | <b>DLS</b>                | Slim Down Light Square |                 |                 |                             |

## ORDERING

| Watts (W) | Ordering Code | Description      | Color Temp (K) | Lumens (lm)     | Size      | Equiv. Wattage (W) | Beam Angle | Rated Hrs | Damp Location | Energy Star |
|-----------|---------------|------------------|----------------|-----------------|-----------|--------------------|------------|-----------|---------------|-------------|
| 9         | 9368          | LED4DLR-60L9CCT3 | 3/4/5000K      | 631 / 704 / 698 | 4" Round  | 60                 | Flood      | 50,000    | •             | •           |
| 9         | 9369          | LED4DLS-60L9CCT3 | 3/4/5000K      | 631 / 704 / 698 | 4" Square | 60                 | Flood      | 50,000    | •             | •           |
| 12        | 9370          | LED6DLR-80L9CCT3 | 3/4/5000K      | 801 / 878 / 854 | 6" Round  | 90                 | Flood      | 50,000    | •             | •           |
| 12        | 9371          | LED6DLS-80L9CCT3 | 3/4/5000K      | 801 / 878 / 854 | 6" Square | 90                 | Flood      | 50,000    | •             | •           |

## SPECIFICATIONS

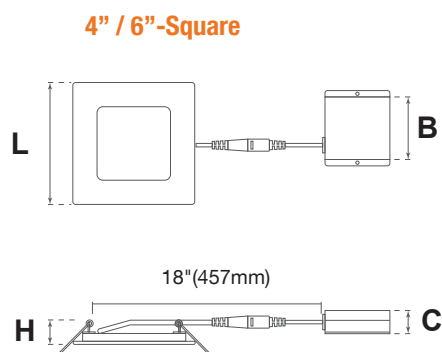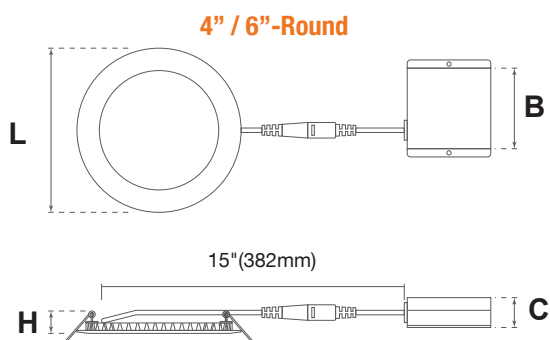


| Size     | Length (L)      | Height(H)     | Box Width (B)  | Box Height (C) | Cut Out Size  | Weight   |
|----------|-----------------|---------------|----------------|----------------|---------------|----------|
| 4-Round  | 4.87" (123.8mm) | 1.0" (24mm)   | 3.37" (85.7mm) | 1.37" (35mm)   | 4.25" (108mm) | 0.94-lbs |
| 4-Square | 4.75" (121mm)   | 0.87" (22mm)  | 3.37" (85.7mm) | 1.37" (35mm)   | 4.25" (108mm) | 0.94-lbs |
| 6-Round  | 6.75" (173mm)   | 1.0" (24mm)   | 3.37" (85.7mm) | 1.37" (35mm)   | 6.25" (158mm) | 1.28-lbs |
| 6-Square | 6.875" (175mm)  | 0.875" (22mm) | 3.37" (85.7mm) | 1.37" (35mm)   | 6.25" (158mm) | 1.28-lbs |

## ACCESSORIES

SOLD SEPARATELY


### Plate for 4" Disk Light

- P10308 PLT-NC/4DL  
(4" Round Pre-Mounting Plate)




### Plate for 6" Disk Light

- P10309 PLT-NC/6DL  
(6" Round Pre-Mounting Plate)




### Universal Plate for 2/4/6" Disk Light

- P10310 PLT-NC/DL/UNV  
(Universal Plate for New Construction  
2/4/6" Disk Light)




## PHOTOMETRICS CHART

### Round (4-inch) Energy Star

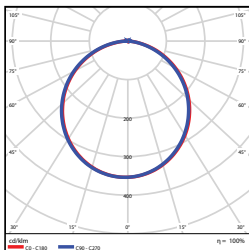


| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5R           | 36.1 ft    |
| 5.0R           | 9.03 ft    |
| 7.5R           | 4.01 ft    |
| 10.0R          | 2.26 ft    |
| 12.5R          | 1.44 ft    |
| 15.0R          | 1.00 ft    |

### Square (4-inch) Energy Star

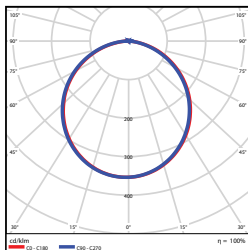


| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5R           | 36.1 ft    |
| 5.0R           | 9.03 ft    |
| 7.5R           | 4.01 ft    |
| 10.0R          | 2.26 ft    |
| 12.5R          | 1.44 ft    |
| 15.0R          | 1.00 ft    |

### Round (6-inch) Energy Star

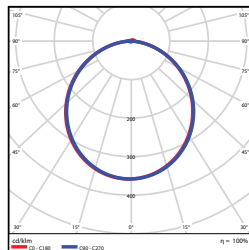

| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5R           | 49.2 ft    |
| 5.0R           | 12.3 ft    |
| 7.5R           | 5.47 ft    |
| 10.0R          | 3.08 ft    |
| 12.5R          | 1.97 ft    |
| 15.0R          | 1.37 ft    |

### Square (6-inch) Energy Star

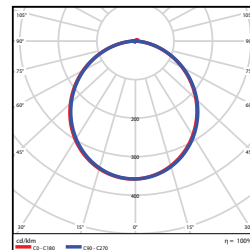

| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5R           | 49.2 ft    |
| 5.0R           | 12.3 ft    |
| 7.5R           | 5.47 ft    |
| 10.0R          | 3.08 ft    |
| 12.5R          | 1.97 ft    |
| 15.0R          | 1.37 ft    |

## PACKAGE

Master Pack: 20 pcs

