

naturalLED®

Turning Light into Savings ▶▶▶



BR, R, A19, G DECORATIVE

5W, 6W, 7W, 9W, 12W, 16W

With a full array of A and BR lamps, naturalLED® offer various replacement for incandescent lamps. Direct replacement lamps for your decorative lighting, which is free of mercury and lead, UL listed and dimmability functions.

Our A19 comes in the choice of 6 watt, 9 watt, and 12 watt to replace your existing incandescent up to 75 watt, saving up to 84% of energy. It is a great value energy efficient lamp, using less energy and lasts up to 25,000 hours average life.

Our BR lamps available in standard medium base (E26), offering in 7 watt to 16 watt replacing up to 100 watt incandescent lamps. Our 14 watt BR30 and 16 watt BR40 are available for an excellent CRI90 meeting your lighting needs.

naturalLED® lamps are ideal lighting solution for track lights, display lights, hotel boutiques, residential, retail, museum lighting and any hospitality applications.



Key Features & Benefits

- ▶ Direct replacement and Instant On
- ▶ Up to 84% energy savings
- ▶ Contains no mercury or lead
- ▶ UL/cUL Listed
- ▶ Rated 15,000~25,000 hours average life
- ▶ 3 Years Limited Warranty

Applications

- ▶ Display Case Lighting
- ▶ Track Lighting
- ▶ Recessed Downlight
- ▶ Accent Lighting
- ▶ General Lighting
- ▶ Residential Lighting
- ▶ Restaurant Lighting


Color Choices




White


Qualifications



Item Code	Description	Bulbs	Color Temp	Wattage	Lumen Output	Equivalent Wattage	CRI	Voltage	Beam Angle	Rated Hours	Dimmable	
A19												
5946	LED6A19/48L/827	A19	2700K	6	450	40	>80	120V	Omni	25,000	•	•
5947	LED6A19/48L/840	A19	4000K	6	450	40	>80	120V	Omni	25,000	•	•
5948	LED6A19/48L/850	A19	5000K	6	450	40	>80	120V	Omni	25,000	•	•
5920	LED9A19/80L/827	A19	2700K	9	800	60	>80	120V	Omni	25,000	•	•
5921	LED9A19/80L/840	A19	4000K	9	800	60	>80	120V	Omni	25,000	•	•
5922	LED9A19/80L/850	A19	5000K	9	800	60	>80	120V	Omni	25,000	•	•
5860	LED12A19/110L/827	A19	2700K	12	1,100	75	>80	120V	Omni	25,000	•	•
5831	LED12A19/110L/840	A19	4000K	12	1,100	75	>80	120V	Omni	25,000	•	•
5832	LED12A19/110L/850	A19	5000K	12	1,100	75	>80	120V	Omni	25,000	•	•
A19-GU24												
5923	LED9A19/80L/GU24/827	A19	2700K	9	800	60	>80	120V	Omni	25,000	•	•
Candelabra / Globe												
5837	LED5CAB/32L/E12/27K	Candle	2700K	5	325	40	>80	120V	Candle	15,000	•	•
5838	LED5CAB/32L/E12/30K	Candle	3000K	5	325	40	>80	120V	Candle	15,000	•	•
5839	LED5CAB/32L/E12/50K	Candle	5000K	5	325	40	>80	120V	Candle	15,000	•	•
5814	LED6G25/45L/27K	G25	2700K	6	450	40	>80	120V	Flood	15,000	•	•
R / BR Lamps												
5834	LED8R20/50L/927	R20	2700K	8	500	50	>90	120V	R20	25,000	•	•
5835	LED9BR30/65L/927	BR30	2700K	9	650	65	>90	120V	BR30	25,000	•	•
5842	LED12BR30/90L/927	BR30	2700K	12	900	75	>90	120V	BR30	25,000	•	•
5836	LED15BR40/120L/927	BR40	2700K	15	1,200	90	>90	120V	BR40	25,000	•	•


► Dimensions

	Item	A	B		Weight (lbs)
	A19 (6-watt)	2.35-in	4.30-in	--	0.20
	A19 (9-watt)	2.35-in	4.60-in	--	0.30
	G25	3.10-in	4.70-in	--	0.30
	Candle	1.50-in	3.80-in	--	0.10

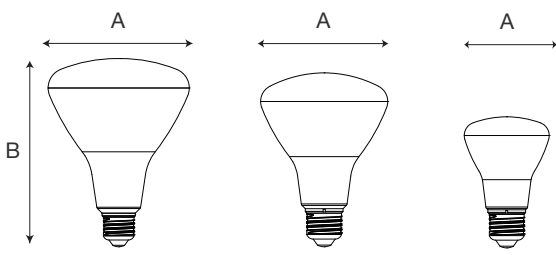	Item	A	B		Weight (lbs)
	R20	2.50-in	3.80-in	--	0.14
	BR30	3.70-in	5.00-in	--	0.35
	BR40	4.50-in	6.40-in	--	0.57


► Master Carton Package

A19
G25
R20
BR30




Package
(Master)
20

Candle

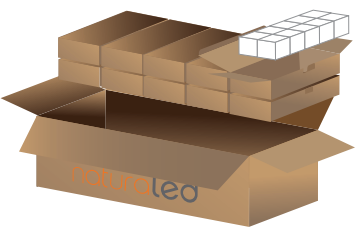

Package
(Master)
100

BR40



Package
(Master)
10