



Color: White

Weight: 1.1 lbs

**Project:****Type:****Prepared By:****Date:****Driver Info**

Type	Constant Current
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	13W

**LED Info**

Watts	13W
Color Temp	Field Adjustable
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	1,128
Efficacy	86.8 lm/W

**Technical Specifications****Other****Product Type:**

Recessed Direct Mount

**LEDs:**

Back-lit LED array provides a uniform source with high efficiency and no pixilation

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Equivalency :**

Equivalent to 75W Incandescent

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Performance****Lumens:**

1000

**Efficacy:**

76.9 lm/W

**Color Accuracy:**

90 CRI

**Color Temperature:**

2700K | 3000K | 3500K | 4000K | 5000K

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Electrical****Power Factor:**

≥0.9

**Dimmable:**

TRIAC and ELV (at 120V only).

**Input Voltage:**

120V

**Operating Frequency:**

60Hz

## Technical Specifications (continued)

## Electrical

## Operating Temperature:

-30°C - 40°C

## Construction

## Size:

6"

## Shape:

Round

## Finish:

White

## Trim Style:

Smooth Trim

## Lens:

Regressed lens  
Impact-resistant polycarbonate  
Convex form and lamp-like appearance  
Diffuse for even illumination

## Air Tight:

Housing certified Air Tight as per ASTM E283

## Electrical Characteristics

## THD:

&lt;25%

## Compliance

## Safety Listing:

UL Listed

## Environment:

Wet

## IC Rated:

Suitable for direct contact with insulation

## ENERGY STAR V2.2:

This product is ENERGY STAR® Version 2.2  
Certified.

## Energy Star ID:

2369051

## T24 JA8 Compliant:

Complies with Title 24 Appendix JA8

## RoHS:

Mercury and UV free. RoHS-compliant  
components.


## FCC:

Complies with Part 15 of the FCC Rules

## Model Number:

DLW0058(WFRD6R139FA120WS)

## Dimensions

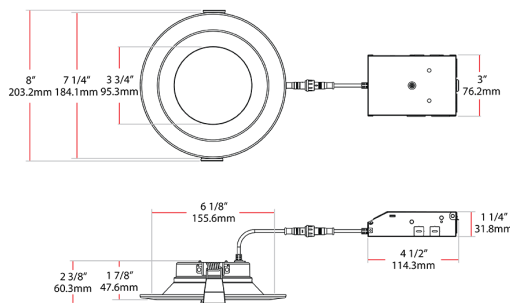

## Features

- 5 color temperatures in 1 SKU (2700K, 3000K, 3500K, 4000K, 5000K)
- Back-lit deep regress remote driver downlight
- Available in a smooth trim option
- No recessed housing or J-box required
- New construction or retrofit applications
- UL wet location rated
- Smooth diffused uniform light distribution
- Dimmable down to 5% on compatible dimmers
- Spring loaded retention clips
- Robust, die cast aluminum construction
- IC and airtight rated
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
WFRD	6	R	13	9FA	120	W	S
	4 = 4" 6 = 6"	R = Round	9 = 9W 13 = 13W	9FA = 90 CRI, Field Adjustable	120 = 120V	W = White	S = Smooth