


# BOL SERIES Outdoor Lighting

BOL-42-R-C-C-MCTP-BK  
42" Round Bollard



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

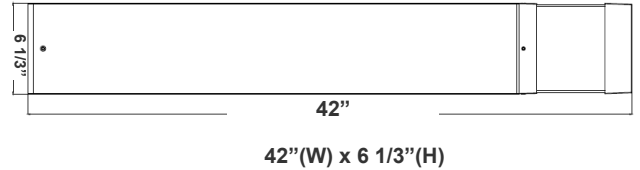

Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

## Features

- Corrosion Resistant Aluminum for Exterior
- Samsung 2835 LED Chips
- Wattage & CCT Selectable Switches inside fixture
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC
- Wattage: 12W-16W-22W
- Power Factor: >0.9
- Efficacy: 130 LPW

### Lighting:

- Wattage & CCT Selectable Switches inside fixture
- Lumens: 3020LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle : 360°
- Lifespan: 70000 Hours

### Mechanical:

- Flat Top with Cone Reflector & Frosted Lens
- Corrosion Resistant Aluminum for Exterior
- Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- Operating Temperature: -40°F to 113°F
- 7 Years Warranty
- IP Rating: IP65, Wet Locations

### Applications:


- Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

### Other Models:


- 22W | 2860LM | BOL-42-R-C-C-MCTP-BR



**Photometrics:** BOL-42-R-C-C-MCTP-BK

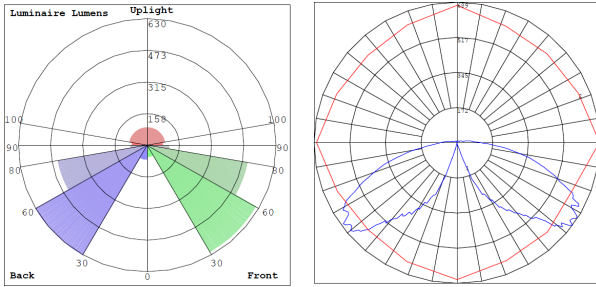

BUD Rating: B1-U3-G2

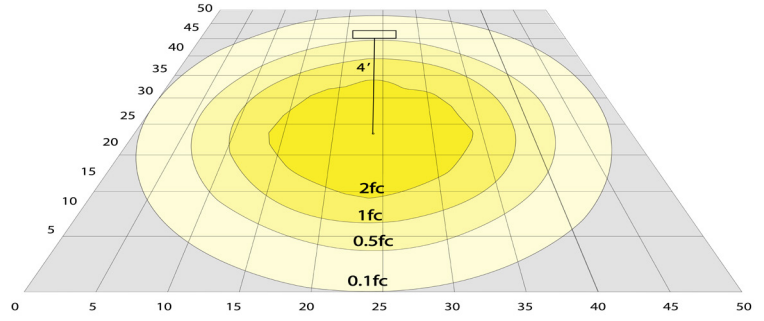

Area 75'x 65' Mounting Height: 9'

**Other Views:**




Lens View



Bottom View



Mounting accessories Included



Mounting Template  
3.98" H x 3.44" W x 0.125" D

**Performance Table:** BOL-42-R-C-C-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BOL-42-R-C-C-MCTP-BK	12W	120~277V	1560LM	3000K 4000K 5000K	B1-U3-G2	130
			1680LM			
			1620LM			
	16W		2080LM			
			2240LM			
			2160LM			
			2860LM			
	22W		3020LM			
			2970LM			

**Sample Ordering**

**Model Height Top Shape Reflector Lens Type Watt/Color Temp. Housing**

BOL - 42 - R - C - C - MCTP - BK

**Example:**

1. BOL-42-R-C-C-MCTP-BK

(FOR BOL 22W MCTP FIXTURE 120-277V)

