


**DIMENSIONS:**

14.6"(W) x 52.4"(L) x 4.7"(H)

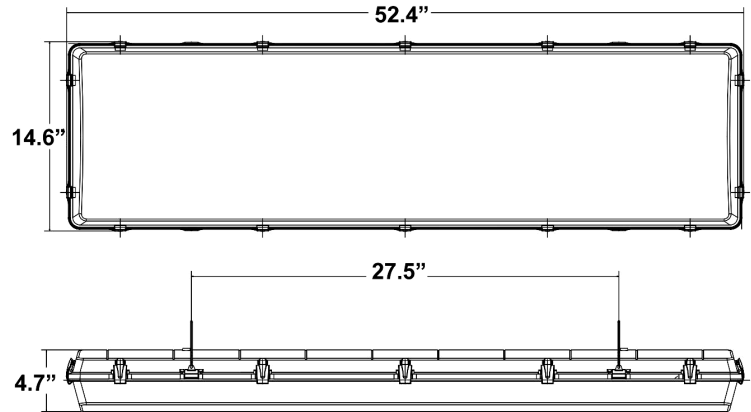

**LLVT-4FT-150W-50K-D**  
**LLVT-4FT-150W-40K-D**

**LED LINEAR VAPOR LIGHT**

Ideal for workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty and wet environment lighting applications.

**ELECTRICAL SPECIFICATIONS:**

- Input Wattage: 150W
- Input Voltage: 120-277VAC 50/60Hz
- Other wattages: 100W
- Power factor: >0.95
- Efficacy: 135LM/W

**HOUSING SPECIFICATIONS:**

- Polycarbonate construction is highly impact resistant
- Stainless Steel Mounting Brackets Incorporated on the Back
- UV-stabilized Polycarbonate diffuser eliminates glare
- Diffuser crystals enhance even light distribution
- (10) Stainless Steel clips evenly seal the luminaire
- Operating temperature: -22°F~104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations

**CERTIFICATIONS: UL, DLC**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LLVT-4FT-150W-50K-D	150W	120~277V AC	20250LM	5000K
LLVT-4FT-150W-40K-D	150W	120~277V AC	20250LM	4000K

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- LED type: SMD Edison 2835
- Lens: Clear Polycarbonate (Optional Opal Lens available)
- Driver: ARCATA/ANTRON
- Total lumens: 20250LM
- Color temperature: 4000K / 5000K
- Color rendering index: >82

**WARRANTY: 5 years**

