


BOLLARD RETROFITS 360° OMNI DIRECTIONAL DESIGN



SuperFlex Bollard

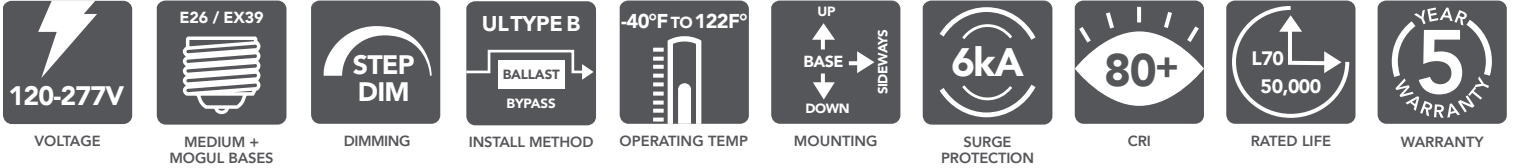

- Switch between 12W, 18W & 24W replacing up to 150W HID.
- Change color temperatures with a flip of a switch (3000K, 4000K, 5000K).
- Multi-directional mounting capability & 360° design. Use base down, base up or base sideways without affecting performance.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Expertly engineered to work efficiently in enclosed fixtures & damp environments, while also protected against insects & dust.
- Dual stage MOV protection with integrated 6kA surge.
- USA designed & specified LED driver.
- Dimmable - Stepped dimming with other wired control communication.
- Field adjustable light output.

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE	DLC PRODUCT CODE
LED-8029E345-A-FW	84400606067	70W-100W-150W	12W-18W-24W	1550 - 3360	3000K/4000K/5000K	E26	N/A
LED-8029M345-A-FW	84400606068	70W-100W-150W	12W-18W-24W	1550 - 3360	3000K/4000K/5000K	EX39	N/A

🇨🇦 CANADA 347V 🇨🇦


PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE	DLC PRODUCT CODE
LED-8029E345C-A-FW	84400606069	70W-100W-150W	12W-18W-24W	1550 - 3360	3000K/4000K/5000K	E26	N/A
LED-8029M345C-A-FW	84400606070	70W-100W-150W	12W-18W-24W	1550 - 3360	3000K/4000K/5000K	EX39	N/A

* Available September 2021



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

BOLLARD RETROFITS 360° OMNI DIRECTIONAL DESIGN

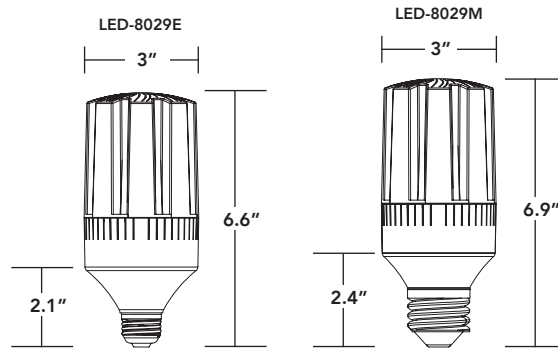

ORDERING GUIDE

PART #	UPC	REPLACES	WATTAGE	CCT	BASE
LED-8029E345-A-FW	84400606067	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	E26
LED-8029M345-A-FW	84400606068	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	EX39

347 VOLT OPTIONS FOR CANADA

PART #	UPC	REPLACES	WATTAGE	CCT	BASE
LED-8029E345C-A-FW	84400606069	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	E26
LED-8029M345C-A-FW	84400606070	70W-100W-150W	12W-18W-24W	3000K/4000K/5000K	EX39

LUMENS: LED-8029E345-A-FW

WATTAGE	CCT	LUMENS
12W	3000K	1550
12W	4000K	1610
12W	5000K	1650
18W	3000K	2450
18W	4000K	2560
18W	5000K	2610
24W	3000K	3170
24W	4000K	3330
24W	5000K	3360

LUMENS: LED-8029M345-A-FW

WATTAGE	CCT	LUMENS
12W	3000K	1550
12W	4000K	1610
12W	5000K	1650
18W	3000K	2450
18W	4000K	2560
18W	5000K	2610
24W	3000K	3170
24W	4000K	3330
24W	5000K	3360



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com