



## EEB Emergency Battery Kit

### FEATURES

- Provides power for emergency lighting needs with fixtures that only have input wiring available
- Constant power design provides constant light output for 90 minutes
- 90 minutes of emergency operating power at the rated wattage
- Includes IP65 rated illuminated test button and faceplate, for use when remote location of button is desired or necessary

### CERTIFICATIONS

- Evaluated to UL 924 requirements; UL Classified for field installation
- Meets CEC Title 20 (California Energy Commission) efficiency standards
- Rated for use in plenum, damp location, and enclosed and gasketed fixtures

### ELECTRICAL

- Input voltage: 120-347V
- Input power: 10W (max)
- Output voltage: 170VDC
- Power Factor: >0.5
- Emergency operation: ≥90 mins
- Recharge: 24 hrs


### THERMAL

- -23°F to 122°F (-5°C to 50°C) operating temperature

### WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date

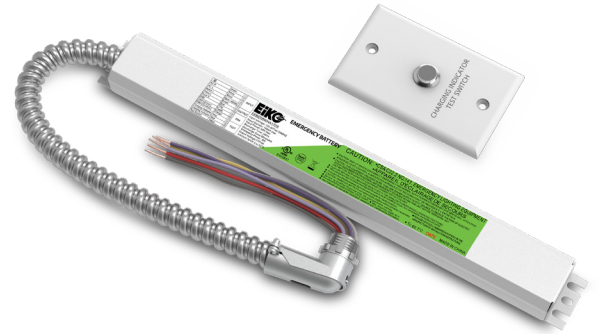

### APPLICATIONS

- Emergency power

## TYPICAL LUMEN OUTPUT

ORDER CODE	ITEM #	WIRE TYPE	INPUT VOLTAGE	MAXIMUM CURRENT	OUTPUT POWER	RATED OUTPUT CURRENT	OUTPUT VOLTAGE
<b>EXTERNAL</b>							
11674	EEBE08WHA170S	Single End	120-347V	100mA	8W	Varies with Load	170 Vdc
11675	EEBE18WHA170S	Single End	120-347V	100mA	18W	Varies with Load	170 Vdc

*Prior to installation, customer should verify suitability for the application. Contact EiKO for information regarding use with EiKO LED fixtures.*



## PRODUCT DIMENSIONS

