


LSI ABOLITE STANDARD DOME

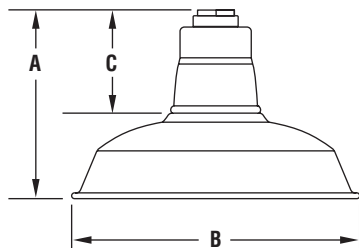

Fixture	Height (A)	Diameter (B)	Neck (C)	Weight (lbs./kg)
RD 100	8-1/4" (210mm)	12" (305mm)	4-1/2" (114mm)	2.5 (1.13kg)
RD 150	9-1/2" (241mm)	14" (356mm)	4-1/2" (114mm)	3.0 (1.36kg)
RD 200	10" (254mm)	16" (406mm)	4-1/2" (114mm)	3.5 (1.59kg)
RD 300	11" (279mm)	18" (457mm)	5" (127mm)	4.0 (1.81kg)

FINISH - Available in either Architectural Textured or High Gloss finish.

LAMP OPTIONS - Designed to accommodate Incandescent, Compact Fluorescent, and High Intensity Discharge lamps. CFL and HID lamps available – order separately; Incandescent lamps by other.

MOUNTING - Cast Aluminum hub tapped for 3/4" NPT conduit. Available factory prewired with 96" leads or white or black cord set and canopies. Cord sets listed for damp locations only.

REFLECTOR - Heavy-duty, spun galvanized steel construction.

SOCKETS - Incandescent (rated 660 Watt/600 Volt) and HID fixtures (4KV pulse rated) are medium base porcelain. Compact Fluorescent sockets feature smart push-pull thermoplastic design for ease of lamping.

BALLAST - CFL and HID require a Wall, Ceiling, or Remote Ballast. See Accessories page.



ARRA
Funding Compliant



Also available in LED

TYPICAL ORDER EXAMPLE: **RD 100 INC 120 MSV CA120WHT G6**

Luminaire Prefix	Diameter	Lamp Wattage	Light Source	Line Voltage	Finish	Mounting	Factory Installed Options	Field Installed Accessories
RD	100 - 12" 150 - 14" 200 - 16" 300 - 18"	100 - 100 Watt Max. 150 - 150 Watt Max. 200 - 200 Watt Max. 300 - 300 Watt Max.	INC - Incandescent	120	MSV - Metallic Silver GWT - Gloss White GBK - Gloss Black GRD - Gloss Red GPT - Textured Graphite RUS - Textured Rust SVG - Satin Verde Green SCP - Satin Copper STQ - Satin Turquoise	LDS96WL - Prewired leads. For use with stem or bracket mounting in wet or indoor locations. CA120WHT - 10' prewired white cord set and canopy ² CA120BLK - 10' prewired black cord set and canopy ² CA120WHTS - 10' prewired white cord set and canopy with SWAG option ² CA120BLKS - 10' prewired black cord set and canopy with SWAG option ² CS120 5WHT - 10' prewired white 5-conductor cord set for use with CFL fixtures ³ CS120 5BLK - 10' prewired black 5-conductor cord set for use with CFL fixtures ³ RC72BLK - 6' prewired black coiled cord set and canopy. Includes SWAG cable ²	G6 - Globe ⁴ PG3 - Globe ⁴	Ball Aligners Decorative Aligners Gooseneck & Wall Brackets Poles & Pole Brackets Stems Wire Guards Remote Ballasts
		26/32/42	CFL - Compact Fluorescent (Globe option required)	UE				
		50 70 100	MH - Metal Halide (PG3 Globe option required)	120 277				
		50 70 100	MP - Metal Halide (for use in open optics in indoor applications only)					
		175	PSMV - Pulse Start Metal Halide ¹ (PG3 Globe option required)					

1- 175 watt available only with RD200 or 300.

2- For indoor applications only. For incandescent and HID fixtures.

3- The 5-Wire cord sets do not include a canopy. Order the SMB 26/32/42/ CFL UE GWT decorative canopy/ballast separately. For indoor applications only.

4- For wattage and size restrictions, see Abolite Globes in accessories section.