



Suspended version




Ceiling mount version



DOWN LIGHT
Quick Ship


or



UP/DOWN LIGHT
See Option

SCR-24D-50K-D
SCR-24D-40K-D
SCR-24D-35K-D

DIMENSIONS:

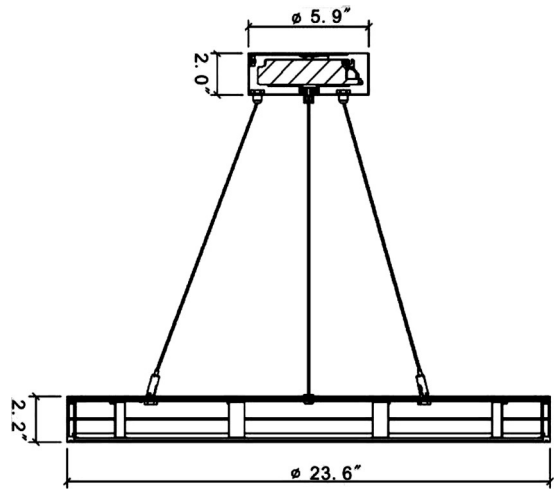

LED ROUND SUSPENDED LIGHTS(UP/DOWN)

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 50W
- Power factor: >0.95
- Efficacy: 105LM/W

HOUSING SPECIFICATIONS:

- White Aluminum housing
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- IP rating: IP20

CERTIFICATIONS: ETL



MODEL	WATTS UP/DOWN	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
SCR-24D-50K-D	50W	120~277VAC	5267LM	5000K
SCR-24D-40K-D	50W	120~277VAC	5197LM	4000K
SCR-24D-35K-D	50W	120~277VAC	4771LM	3500K

FACTORY-INSTALLED OPTIONS:

MODEL	DESCRIPTION
OPT-SCR-SMK	Ceiling Mount Conversion - Add option as a line item in orders under selected fixture
OPT-SCR-ULK	ADDS UPLIGHT DIVERT 20% OF LIGHT TO UP-Add option as a line item in orders under selected fixture

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Polycarbonate
- Total lumens: 5267LM/5197LM/4771LM
- Color temperature: 5000K/4000K/3500K
- Color rendering index: >80
- Beam Angle: 112°


WARRANTY: 5 years



SCR-24D-50K-D
 SCR-24D-40K-D
 SCR-24D-35K-D

LED ROUND SUSPENDED LIGHTS(UP/DOWN)

PHOTOMETRIC CHART:

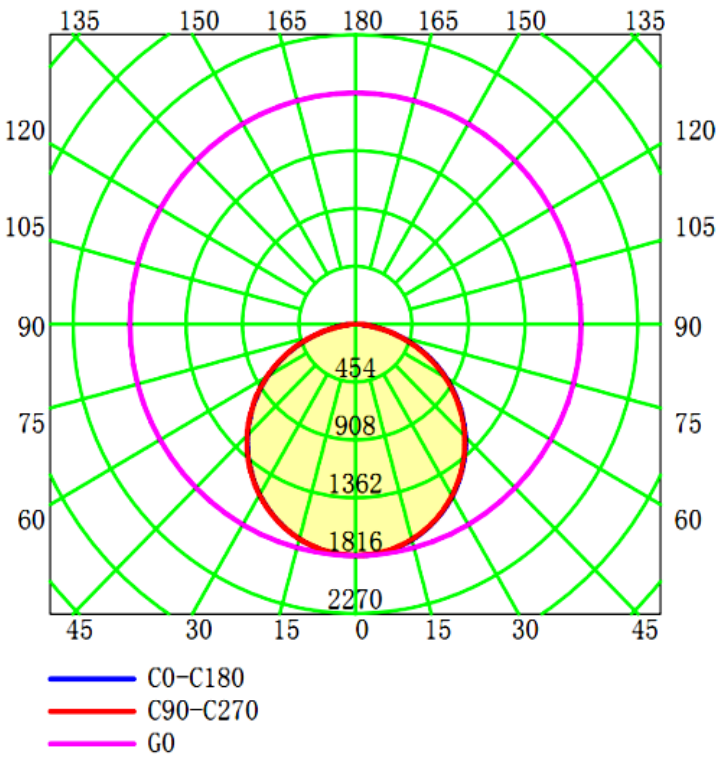

MODEL	WATTS UP/DOWN	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
SCR-24D-50K-D	50W	120~277VAC	5267LM	5000K
SCR-24D-40K-D	50W	120~277VAC	5197LM	4000K
SCR-24D-35K-D	50W	120~277VAC	4771LM	3500K

