




DIMENSIONS:

7.17"(H) x Ø5.59"(OD)

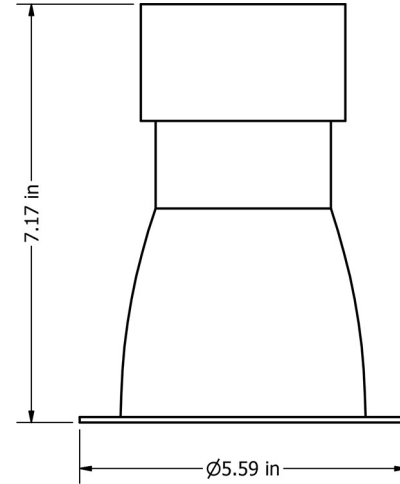

CRL4-27W-50K
CRL4-27W-40K
CRL4-27W-30K

LED CRL Engine & Driver Unit

The 4-inch Commercial Recessed Light is UL rated for use in all compatible housings commonly found in hotels, office spaces, major retail stores, educational facilities, government buildings, and hospitals. Great for retrofitting CFL, HID, Metal Halide and Incandescent fixtures with apertures of Ø4.1"-Ø4.7"

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 27W
- Input Voltage: 100-277VAC 50/60Hz
- Power factor: >0.9
- Efficacy: 88.4LM/W~90.86LM/W

HOUSING SPECIFICATIONS:

- Oxidized metal reflector enhances lumen output
- Operating temperature: Below 113°F
- Lifespan: 50000 Hrs.
- IP rating: Damp Rated

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CRL4-27W-50K	27W	100~277V AC	2387LM	5000K
CRL4-27W-40K	27W	100~277V AC	2366LM	4000K
CRL4-27W-30K	27W	100~277V AC	2341LM	3000K

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type/brand: CREE COB
- Total lumens: 2341LM, 2366LM and 2387LM
- Color temperature: 3000K / 4000K / 5000K
- Color rendering index: >80
- Beam angle: 40°

WARRANTY: 5 years

