

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED LOC-WP Multi Watt Multi CCT Wall Pack Light Series



FEATURES

- Default Wattage is the highest wattage
 - 80MW – 80W
 - 120MW – 120W
- Default CCT: 5,000K
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- Semi cut-off
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

Special Order:

- Other CCTs

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with bronze powder-coated finish. Glass lens.

OPTICAL SYSTEM:

Lumileds LUXEON 3030 2D LED chips. High quality tempered glass optics. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -40°C to 40°C, -40°F to 104°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:

0-10V dimming comes standard. Photocell is included.






MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-WP-80MW(25/40/60/80)MCCT(30/40/50)DLV	25W	3,500LM	140LM/W	71.3	0.985	11.8%	70W – 150W HID
LOC-WP-80MW(25/40/60/80)MCCT(30/40/50)DLV	40W	5,600LM	140LM/W	71.3	0.985	11.8%	70W – 150W HID
LOC-WP-80MW(25/40/60/80)MCCT(30/40/50)DLV	60W	8,400LM	140LM/W	71.3	0.985	11.8%	175W – 250W HID
LOC-WP-80MW(25/40/60/80)MCCT(30/40/50)DLV	80W	11,421.3LM	140LM/W	71.3	0.985	11.8%	175W – 250W HID

MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-WP-120MW(60/80/100/120)MCCT(30/40/50)DLV	60W	8,205LM	136.75LM/W	71.6	0.966	8.4%	175W – 250W HID
LOC-WP-120MW(60/80/100/120)MCCT(30/40/50)DLV	80W	10,940LM	136.75LM/W	71.6	0.966	8.4%	175W – 250W HID
LOC-WP-120MW(60/80/100/120)MCCT(30/40/50)DLV	100W	13,675LM	136.75LM/W	71.6	0.966	8.4%	320W – 400W HID
LOC-WP-120MW(60/80/100/120)MCCT(30/40/50)DLV	120W	16,753LM	136.75LM/W	71.6	0.966	8.4%	320W – 400W HID

Series	80 MW Wattage	120MW Wattage	Color Temperature	Dimming	Voltage
LOC-WP-MWMCCT	25W 40W 60W 80W	60W 80W 100W 120W	3000K 4000K 5000K	Dimmable	LV = 120-277V

MEASUREMENTS

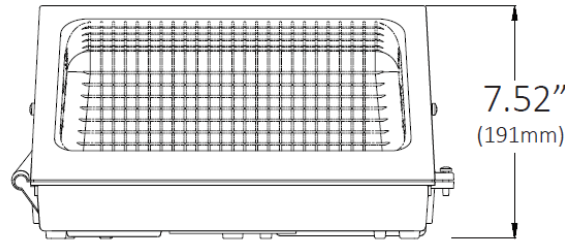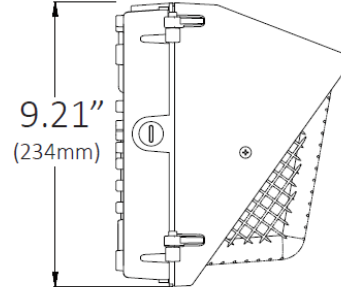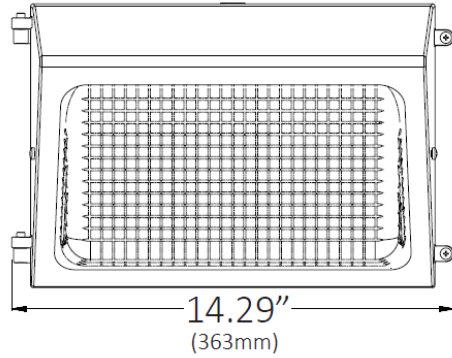

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-WP-80MW(25/40/60/80)MCCT(30/40/50)DLV	1	lbs	00810050940498
LOC-WP-120MW(60/80/100/120)MCCT(30/40/50)DLV	1	lbs	00810050940511

MOUNTING OPTIONS



Quick Mount Back Plate

OPTIONAL ACCESSORIES



Emergency Battery

LOC-EMDR-15W-050



Cut-off Shield