

Job/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

Job Type: \_\_\_\_\_  
 Date: \_\_\_\_\_




## ■ specifications: internal

Standard 120/277V input. The N4X-EPX is designed with an internal, maintenance free, valve regulated sealed lead-acid battery or optional Ni-Cad battery providing emergency lighting duration of 90 minutes. Fuse protection is standard.

## ■ specifications: external

The N4X-EPX comes standard in gray. Wall, ceiling or end mounting configurations are available. Ceiling and end mount versions come complete with a factory installed weatherproof steel canopy. Single or double face versions must be specified. Removable chevron arrows are standard on each unit along with an external LED status indicator and test switch. Four polycarbonate pressure screws firmly hold the face to the housing. Top or side mounted emergency heads are fully adjustable. Other options for heads are available.

## ■ dimensions

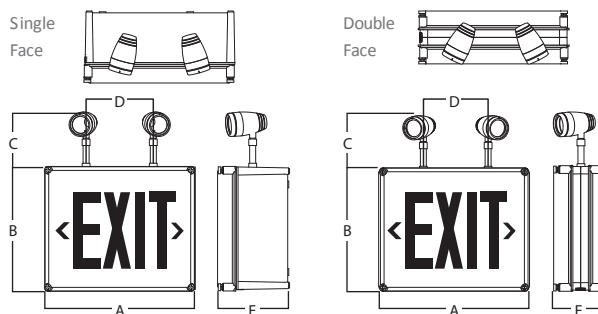

Model	A	B	C	D	E
Single Face	14 1/4"	12"	5 1/4"	6 1/2"	6 3/4"
	362mm	305mm	133mm	165mm	171mm
Double Face	14 1/2"	12"	5 1/4"	6 1/4"	5"
	368mm	305mm	133mm	159mm	127mm

NOTE: Dimensions C & D will vary depending on which style of heads are chosen.

## ■ ordering logic

Model	Face No.	LED	Volts	Watts Pb-A Battery	Watts Ni-Cd Battery	Mounting	Heads <sup>2</sup>	Options
N4X-EPX	1 (single)	R (red)	6 (6V)	12 (6V)	22 (6V)	W (Wall-no canopy)	0 (no heads)	SD (self diagnostics)
	2 (double) <sup>1</sup>	G (green)	12 (12V)	18 (6V)	42 (6V,12V)	C (Ceiling-w/ canopy)	2H20 (two LED MR16)	FP (food prep lens)
				27 (6V,12V)	90 (6V,12V)	E (End)	2 MEGA(two LED 30W) <sup>5</sup>	TD <sup>3</sup> (time delay relay)
				36 (6V,12V)				IH <sup>4</sup> (internal heater- specify)
				60 (6V,12V)				SL (special lettering)
				72 (6V,12V)				PK (pendant kit)
				120 (6V,12V)				WG (wire guard)
				140 (12V)				SM (side mount heads)

<sup>1</sup>See battery configuration guide on next page.

<sup>2</sup>Specify desired lamp wattage from lamp selection chart

<sup>3</sup>Must specify 5, 10 or 20 mins and AC Voltage

<sup>4</sup>Specify AC Voltage

<sup>5</sup>Require wattage capacity of 60 Watts or more

EXAMPLE: N4X-EPX-1-R-12-60-W-2H20-12V-SD

## ■ specifications: electrical

The N4X-EPX is designed with an internal, maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration of 90 minutes. Recharge time of the battery is forty-eight (48) hours. The battery operating temperature without the internal heater/ thermostat option is 40°C maximum and 10°C minimum; with the internal heater (IH) option the minimum battery operating temperature is -20°C.

The N4X-EPX utilizes a high-efficiency two stage charger providing precise float voltage control with low voltage disconnect protection. All components used in the circuitry are temperature compensated. The charger also has brownout and short circuit protection. Charger status is easily determined via a dual diagnostic LED display which indicates AC/ON and High Charge. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit and lamp load.

## ■ specifications: mechanical





The N4X-EPX housing is constructed from durable, corrosion resistant fiberglass. The NEMA 4X housing is fully gasketed for damp and wet locations with a hot-bonded silicone gasket. Exit face(s) are made from a high clarity, clear polycarbonate that has been painted white on the internal side only, making the unit highly scratch resistant. Custom face colors and special wording / graphics are available, please specify.

## ■ extreme climate design

The N4X-EPX has been designed to perform in applications where the climate would punish any standard sign. The entire internal cavity of the sign is protected from moisture ingress by an extremely resilient silicone gasket. The liquid gasketing is "hot-bonded" to the lens during the manufacturing process. This procedure eliminates any chance of the gasketing to become dry and pull away from the lens. The gasketing always holds its original form and has "memory retention" so that it effectively and consistently protects the N4X-EPX from moisture. The N4X-EPX can also be equipped with an optional thermostatically controlled heater for cold environments.

## ■ specifications: self diagnostics

The N4X-EPX self-diagnostics feature automatically monitors the functional operation of the unit. Autotest monitors the operation of the lamps, battery and circuitry and displays any alerts. Periodic emergency tests, up to ninety (90) minutes duration are simulated to ensure proper operation during an actual power failure. Operating status is visually indicated by multi-function LED indication.

	Steady Green :	Normal Operation
	Flashing Green :	AC Interruption in Last 48 Hours
	Steady Yellow :	Lamp Circuit Malfunction
	Flashing Yellow :	Auto-test or Manual Test in Progress
	Steady Red :	Battery Failed Testing
	Flashing Red :	Battery Disconnected or Charger Malfunction

## ■ warranty

The N4X comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

## ■ specifications: sanitation listing

The N4X-EPX is sanitation listed. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

## ■ lamp selection

	6V	12V
H20 MR16 LED	5W, 7W	30W
MEGA	N/A	

## ■ model rating guide Pb-A (Capacity)

Model	Input Voltage	Wattage Rating 90 Minutes
N4X-EPX-6-12	6	12
N4X-EPX-6-18	6	18
N4X-EPX-6-27*	6	27
N4X-EPX-6-36*	6	36
N4X-EPX-6-60	6	60
N4X-EPX-6-72	6	72
N4X-EPX-6-120 <sup>1</sup>	6	120
N4X-EPX-12-27*	12	27
N4X-EPX-12-36*	12	36
N4X-EPX-12-65	12	65
N4X-EPX-12-72	12	72
N4X-EPX-12-120 <sup>1</sup>	12	120

\*Available in single or double face.

Note 1: Requires a larger cabinet size. Please contact factory.

## ■ model rating guide Ni-Cd (Capacity)

Model	Input Voltage	Wattage Rating 90 Minutes
N4X-EPX-6-22*	6	22
N4X-EPX-6-42*	6	42
N4X-EPX-6-54 <sup>1</sup>	6	54
N4X-EPX-6-90* <sup>1</sup>	6	90
N4X-EPX-12-45*	12	45
N4X-EPX-12-60 <sup>1</sup>	12	60
N4X-EPX-12-90 <sup>1</sup>	12	90
N4X-EPX-12-130	12	90

\*Available in single or double face.

Note 1: Requires a larger cabinet size. Please contact factory.