




TRADITIONAL WALL PACK

flexCOLOR
switch
between
color
temps ↓

- Easily adjust the color temperature via a switch on the unit.
- Powder coated aluminum housing makes the unit suitable for wet locations.
- Borosilicate glass lens is durable while also keeping the unit cool.
- Aluminum LED board is highly conductive and waterproof.
- Built-in photocell.
- Includes level indicator to ensure proper alignment when installed.

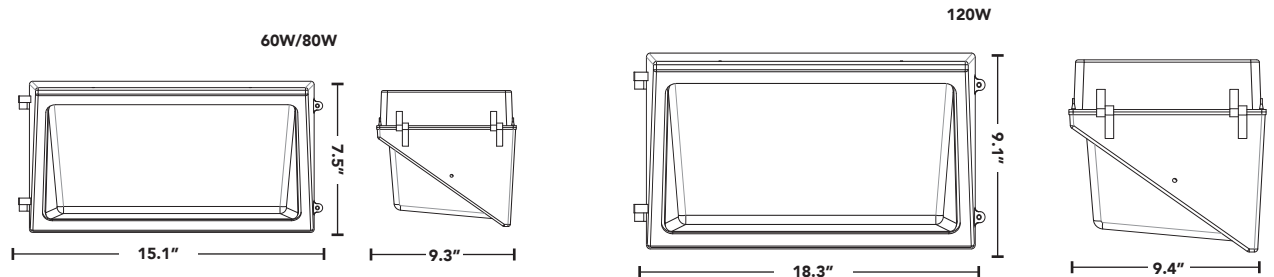

**120/
277V**
ALSO WORKS
ON 208V & 240V

0-10V DIM

70+
CRI

IP65
RATED
INGRESS
PROTECTION

-40°F TO 104°F
OPERATING
TEMP

L70
50,000hrs
RATED LIFE

PART #	REPLACES	WATTAGE	LUMENS	FLEXCOLOR
RP-B-WPT-78L-FC	175W HID	60W	7800	3000K/ 4000K /5000K/5700K
RP-B-WPT-100L-FC	250W HID	80W	10400	3000K/ 4000K /5000K/5700K
RP-B-WPT-150L-FC	400W HID	120W	15600	3000K/ 4000K /5000K/5700K