

DESCRIPTION

The WLZ Series features an architecturally relevant low-profile LED design in lumen packages ranging from 1500 lumens to over 12,000 lumens. Its high-efficiency light engine is designed for optimal light control and distribution with zero uplight. This family of product is offered in several size housings to complement any building exterior and accommodates mounting heights up to 35'. Integral emergency battery backup available for path of egress with Cold Location operation down to -20°C.

SPECIFICATIONS

Construction

- Sleek die-cast aluminum housing with stainless steel hardware and powder coated black, bronze, silver or white finish
- UV-stabilized polycarbonate optical lens
- Integral heat sink for maximized heat dissipation
- Back box houses drivers away from LEDs and includes three 3/4" hubs (WLZ1 and WLZ2 - two 3/4" hubs)

Optics/LEDs

- Zero uplight design to minimize light pollution
- 15 to 100 Watt models replace up to 400 Watt HID for up to 70% energy savings
- Efficacies up to 123 LPW at 5000K to maximize utility rebates
- Type III and Type IV distributions for optimal light distribution (WLZ1 - Type III only)
- Available in 3000K, 3500K, 4000K and 5000K CCT
- L70 of 50,000 hours at 40°C
- CRI of ≥70

Electrical

- Class 2 power supply, 120-277VAC, 50/60Hz
- 347/480VAC Dedicated driver option for WLZ4, WLZ7 and WLZ10
- 0-10V Dimming driver (120-277VAC only)
- Power supply rated Class A EMI rating

Installation

- Housing hinges to back box and is secured with set screws
- Back box is complete with three 3/4" hubs and internal bubble level for easy installation (WLZ1 and WLZ2 - two 3/4" hubs)
- Mounts to a standard 3-1/2" or 4" square electrical J-box
- Suitable for downlight installation only

Options

Battery Backup

- Integral battery backup (BB) provides over 700 lumens and 90 minutes of runtime for path of egress. Rated for ambient temperatures of 0°C to 40°C (32°F to 104°F). Not available on WLZ1
- Integral Battery Backup with Internal Heater (BB-IH) provides over 700 lumens and 90 minutes of runtime for path of egress in Cold Locations down to -20°C. Not available on WLZ1 or WLZ2.
- Factory installed dual driver options for WLZ4 and WLZ10 (WLZ7 is standard with two drivers)
- Factory installed 120/277VAC button type photocontrol option (PC)
- Factory installed 10kVA surge protection options (SP or SPH)

Accessories (Field Installed)

- 120/277VAC Button type universal photocontrol options accessory (PCU)
- Dimming occupancy sensor programmable, Wattstopper FSP221 available in multiple finishes (TL-SCES-L2)
- Remote control for occupancy sensor. Optional (TL-FSIR100)

Testing & Compliance

- cULus Listed for Wet Locations
- DesignLights Consortium® (DLC) Qualified (verify QPL for specific models)
- International Dark Sky friendly approved product. (IDA) 3000K only
- Operating temperatures: -40°C to 40°C (-40°F to 104°F)

Warranty

- Five year warranty (terms and conditions apply)

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____



Specs At A Glance*					
Model	WLZ1	WLZ2	WLZ4	WLZ7	WLZ10
Wattage (nominal)	15W	25W	40W	70W	100W
Lumens (lm)	1745	3198	5021	8729	12,393
Efficacy (LPW)	115	118	123	120	116
Equivalency (HID)	50W	100W	150W	250W	400W
Distribution	Type III, IV (WLZ1 Type III only)				
CCT	3000K, 3500K, 4000K, 5000K				
CRI	≥70				
Input Voltage	120-277VAC, 50/60Hz, 347/480V option				
Operating Temp	-40°C to 40°C (-40°F to 104°F)				
Certifications	UL Listed for Wet Locations, DLC, IDA				
Warranty	5 Years				
Weight	2.6 lbs	3.3 lbs	6.0 lbs	9.9 lbs	12.1 lbs

* Nominal Wattage, tested at 5000K CCT, Type III distribution. Values at 120/277VAC. See performance table for more detailed lumen information.

Note: Environment and application will affect actual performance. Typical values and 25°C (77°F) used for testing. Specifications subject to change without notice.

Ordering Information (Example: WLZ2-3-4K-BR)

Series/Configuration	Distribution	Input Voltage	CCT	Finish	Options
WLZ1 = 15W, Extra-Small	3 = Type III	BLANK = 120-277VAC	3K = 3000K	BL = Black	BB ⁵ = Battery backup
WLZ2 = 25W, Small	4 ² = Type IV	HVS ³ = 347/480VAC	35K ⁴ = 3500K	BR = Bronze	BB-IH ⁶ = Cold Location Battery backup (operation down to -20°C)
WLZ4 = 40W, Medium			4K = 4000K	SV = Silver	DD ⁷ = Dual driver
WLZ7 ¹ = 70W, Large			5K = 5000K	WH = White	PC = 120/277VAC Button photocontrol
WLZ10 = 100W, Extra-Large					SP = 120/277VAC Surge protection SPH = 347/480VAC Surge protection

Notes

¹ Standard with two drivers

² Not available for WLZ1 configuration

³ WLZ4, WLZ7 and WLZ10 only, compatible with SPH option only

⁴ Consult factory for lead times

⁵ WLZ2, WLZ4, WLZ7 and WLZ10 only. 120/277VAC Only. Not compatible with DD and SPH options

⁶ WLZ4, WLZ7 and WLZ10 only. 120/277VAC Only. Not compatible with DD and SPH options

⁷ Dual driver option available for WLZ4 and WLZ10 only. Not compatible with photocontrol option, consult factory

⁸ Compatible with WLZ4, WLZ7 and WLZ10 only. Contact factory for compatibility with other options

⁹ Dimming occupancy sensor, programmable, Wattstopper FSP221, L2 Lens

¹⁰ Order as a separate line item. Shipped in separate box for final installation in the field

Accessories¹⁰ (Field Installed)

PCU = 120/277VAC Button photocontrol accessory

TL-FSIR-100 = Remote control for TL-SCES sensor (optional)

TL-SCES-L2^{8,9} = Motion sensor, white finish

TL-SCES-L2-BL^{8,9} = Motion sensor, black finish

TL-SCES-L2-BR^{8,9} = Motion sensor, bronze finish

TL-SCES-L2-GR^{8,9} = Motion sensor, gray finish


Performance Data

Model	Wattage (W)	CCT	Distribution	Lumen Output (lm)	Efficacy (LPW)	DLC
WLZ1-3-3K-XX	15	3000K	Type III	1531	101	DLC
WLZ1-3-4K-XX	15	4000K	Type III	1534	101	N/A
WLZ1-3-5K-XX	15	5000K	Type III	1745	115	DLC
WLZ2-3-3K-XX	25	3000K	Type III	2795	103	DLC
WLZ2-3-4K-XX	25	4000K	Type III	2997	111	DLC
WLZ2-3-5K-XX	25	5000K	Type III	3198	118	DLC
WLZ2-4-3K-XX	25	3000K	Type IV	2609	98	N/A
WLZ2-4-4K-XX	25	4000K	Type IV	2797	105	DLC
WLZ2-4-5K-XX	25	5000K	Type IV	2985	112	DLC
WLZ4-3-3K-XX	40	3000K	Type III	4389	107	DLC
WLZ4-3-4K-XX	40	4000K	Type III	4705	115	DLC
WLZ4-3-5K-XX	40	5000K	Type III	5021	123	DLC
WLZ4-4-3K-XX	40	3000K	Type IV	4021	98	N/A
WLZ4-4-4K-XX	40	4000K	Type IV	4310	105	DLC
WLZ4-4-5K-XX	40	5000K	Type IV	4599	112	DLC
WLZ7-3-3K-XX	70	3000K	Type III	7657	105	DLC
WLZ7-3-4K-XX	70	4000K	Type III	8193	113	DLC
WLZ7-3-5K-XX	70	5000K	Type III	8729	120	DLC
WLZ7-4-3K-XX	70	3000K	Type IV	6837	94	DLC**
WLZ7-4-4K-XX	70	4000K	Type IV	7316	101	DLC**
WLZ7-4-5K-XX	70	5000K	Type IV	7794	107	DLC
WLZ10-3-3K-XX	100	3000K	Type III	10,871	102	DLC
WLZ10-3-4K-XX	100	4000K	Type III	11,632	109	DLC
WLZ10-3-5K-XX	100	5000K	Type III	12,393	116	DLC
WLZ10-4-3K-XX	100	3000K	Type IV	9706	91	N/A
WLZ10-4-4K-XX	100	4000K	Type IV	10,385	98	DLC
WLZ10-4-5K-XX	100	5000K	Type IV	11,065	104	DLC

* Nominal Wattage. Values at 120/277VAC

** HVS configuration not DLC qualified

Dimensions

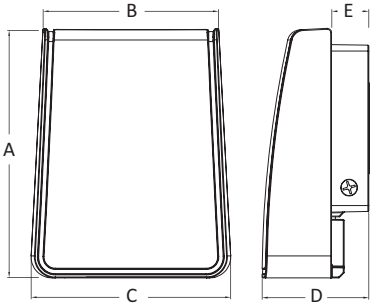


Model	A	B	C	D	E
WLZ1	6.7"	5.0"	5.6"	3.2"	1.4"
WLZ2	8.0"	5.7"	6.0"	3.2"	1.4"
WLZ4	10.2"	6.8"	7.8"	5.0"	1.9"
WLZ7	11.6"	8.3"	9.4"	5.0"	1.9"
WLZ10	11.6"	10.3"	11.5"	5.0"	1.9"

Sample Photometrics

WLZ4-3-5K

IES: TYPE III VERY SHORT
 MOUNTING HEIGHT: 10'
 TILT: ZERO
 HORIZONTAL SPACING CRITERIA: 2.0

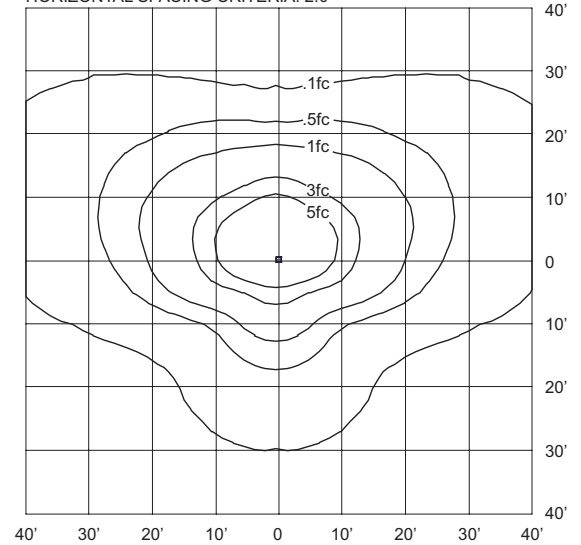


Sensor Details (Accessory: TL-SCES-L2)



Side and Top Sensor Coverage Pattern:

With FSP-L7 lens (included) 360° lens

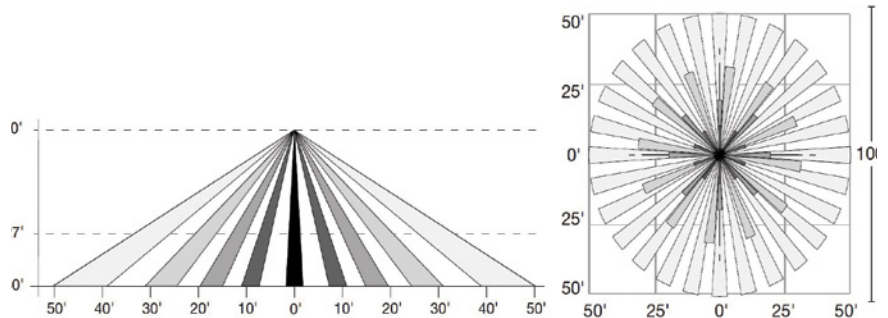

Settings for TL-SCES-L2

	Settings	Default
High Mode:	0-10V	10V
Low Mode:	Off, 0-9.8V	1V
Time Delay:	30 seconds; 5-30 minutes	5 Minutes
Cut Off Delay:	None, 1-60 Minutes, 1-5 hours	1 Hour
Sensitivity:	None, Low, Medium, Max	Max
Setpoint:	None, 1-250fc, Auto	Disabled
Ramp Up Time:	None, 1-60 Seconds	Disabled
Fade Down Time:	None, 1-60 Seconds	Disabled

NOTE:

To change settings in the field, please order TL-FSIR-100 controller.

