

Product Specifications

CREE TRUEWHITE® TECHNOLOGY

A revolutionary way to generate high-quality white light, Cree TrueWhite® Technology is a patented approach that delivers an exclusive combination of 90+ CRI, beautiful light characteristics, and lifelong color consistency, all while maintaining high luminous efficacy – a true no compromise solution.

CONSTRUCTION & MATERIAL

- Low brightness parabolic spun Alzak aluminum cone, 0.06" (2mm) thick with polished radius and continuous self-flange
- Soft Satin Glow Clear finish, standard
- 2" (51mm) aperture throat to accommodate all standard and up to 3" (76mm) thick ceilings and provide flexibility in mounting within grid
- Provided with quick mounting brackets for optional carrying channels
- Light engine, optics, and driver accessible from below ceiling

ELECTRICAL SYSTEM

- **Power Factor:** > 0.9 for 120V and 277V
- **Total Harmonic Distortion:** < 20% at full load
- **Input Power:** 120, 277V, or 347V, 50/60Hz
- **Operating Temperature Range:** -18°C - +40°C (0°F - +104°F); minimum operating temperature with EB7 option is 0°C (32°F)

CONTROLS

- For standard control offering refer to control availability chart on page 4
- Triac dimming to 5%
- Continuous dimming to 10% with 0-10V DC control protocol
- **10V Source Current:** 9L & 13L: 0.15mA; 20L-40L: 2.2mA
- For use with Class 2 dimming systems only
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- Lutron EcoSystem® Dimming to 1%
- Reference <http://creelighting.com/products/indoor/new-construction-downlights/kr-series> for recommended dimming controls and wiring diagrams

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for thru-wiring 8#12AWG-90°C
- Suitable for damp locations
- Designed for indoor use only
- Thermally protected Type NON-IC in accordance with Article 410 of the NEC and UL 1598
- Requires minimum 90°C supply conductors
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions
- EnergyStar® certified when ordered with 30L. Please refer to <https://www.energystar.gov/productfinder/product/certified-light-fixtures/results> for most current information
- RoHS compliant. Consult factory for additional details
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

KR Series Ambient Adjusted Lumen Maintenance ¹						
Ambient	Initial Delivered Lumens	Initial LMF	25K hr Reported ² LMF	50K hr Reported ² LMF	75K hr Estimated ³ LMF	100K hr Estimated ³ LMF
5°C	9L, 13L	1.04	1.04	1.04	1.04	1.04
	20L	1.04	1.04	1.04	1.04	1.04
	30L	1.04	1.03	1.03	1.03	1.03
	40L	1.04	1.01	1.00	1.00	1.00
10°C	9L, 13L	1.03	1.03	1.03	1.03	1.03
	20L	1.03	1.03	1.03	1.03	1.03
	30L	1.03	1.02	1.02	1.02	1.02
	40L	1.03	1.00	0.99	0.99	0.99
15°C	9L, 13L	1.02	1.02	1.02	1.02	1.02
	20L	1.02	1.02	1.02	1.02	1.02
	30L	1.02	1.01	1.01	1.01	1.01
	40L	1.02	0.99	0.98	0.98	0.98
20°C	9L, 13L	1.01	1.01	1.01	1.01	1.01
	20L	1.01	1.01	1.01	1.01	1.01
	30L	1.01	1.00	1.00	1.00	1.00
	40L	1.01	0.98	0.97	0.97	0.96
25°C	9L, 13L	1.00	1.00	1.00	1.00	1.00
	20L	1.00	1.00	1.00	1.00	1.00
	30L	1.00	0.99	0.99	0.99	0.99
	40L	1.00	0.96	0.96	0.96	0.95
30°C	9L, 13L	0.99	0.99	0.99	0.99	0.99
	20L	0.99	0.98	0.98	0.98	0.98
	30L	0.99	0.98	0.98	0.98	0.98
	40L	0.99	0.96	0.95	0.95	0.94
35°C	9L, 13L	0.98	0.98	0.98	0.98	0.98
	20L	0.98	0.97	0.97	0.97	0.97
	30L	0.98	0.97	0.97	0.97	0.97
	40L	0.98	0.95	0.94	0.94	0.94

¹Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors.
²In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.
³Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.

Installation

- Recommended ceiling cutout 4.75" (120mm)




Note: 30L and 40L versions require marked spacing: 24" (600mm) x 12" (300mm) x 1/2" (12mm). 24" (600mm) luminaire to luminaire, 12" (300mm) luminaire to side wall, 1/2" (12mm) above luminaire

Photometry

KR4-30L-27K-120V W/KR4T-SSGC-FF BASED ON UL REPORT TEST #: 157461

Luminaire photometry has been conducted in accordance with IES LM-79. IES LM-79 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

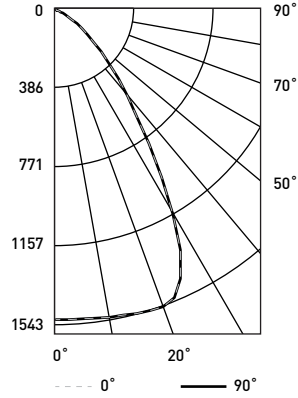

UL Test Report #: 157461
 KR4-30L-27K-120V
 w/KR4T-SSGC-FF
 Initial Delivered Lumens: 2,235
 Efficacy: 59.0 LPW
 S/M: 1.1

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	119	119	119	119
1	112	109	106	104
2	106	100	95	91
3	99	91	86	81
4	93	84	77	73
5	87	77	71	66
6	82	72	65	60
7	77	66	59	54
8	73	62	55	50
9	69	58	51	46
10	65	54	47	43

Effective Floor Cavity Reflectance: 20%

Average Luminance Table (cd/m²)				
Vertical Angle	Horizontal Angle			
	0°	45°	90°	
45°	59,182	59,182	59,182	
55°	30,926	30,926	30,926	
65°	12,854	12,854	12,854	
75°	6,046	6,046	6,046	
85°	1,795	1,795	1,795	

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	1,228	N/A	54.8%
0-40	1,733	N/A	77.4%
0-60	2,170	N/A	96.9%
0-90	2,239	N/A	100.0%
0-180	2,239	N/A	100.0%

Cone of Light		
Distance from Workplane	Footcandles	Beam Diameter
6' (1.8m)	42	6.9' (2.1m)
8' (2.4m)	24	9.1' (2.8m)
10' (3.0m)	15	11.5' (3.5m)
12' (3.7m)	11	13.5' (4.1m)
14' (4.3m)	8	15.8' (4.8m)

For exact photometric data, please reference our available IES and LM-79 test results at <http://creelighting.com/products/indoor/new-construction-downlights/kr-series>

Application Reference

Based on KR4-30L-27K-120V W/KR4T-SSGC-FF Luminaire

Open Space					
Spacing	Lumens	Wattage	LPW	w/ft²	Average FC
4 x 4	2,350	39	60	2.34	144
6 x 6				1.09	67
8 x 8				0.59	36
10 x 10				0.39	24

10' Ceiling, 80/50/20 Reflectances, 2.5 workplane. LLF: 1.0 Initial. Open Space: 50' x 40' x 10'

Corridor					
Spacing	Lumens	Wattage	LPW	w/ft²	Average FC
4' on Center	2,350	39	60	1.63	57
6' on Center				1.04	36
8' on Center				0.78	27
10' on Center				0.65	23

10' Ceiling, 80/20/50 Reflectances, Light levels on the ground. LLF: 1.0 Initial. Corridor: 6' Wide x 100' Long

Control Availability Chart

Lumen Package	Non-Dimming			Triac Dimming to 5%			0/1-10V Dimming to 10%		
	120V	277V	347V	120V	277V	347V	120V	277V	347V
9L	N/A	S - Leave control Blank when ordering	N/A	S - Leave control Blank when ordering	N/A	N/A	0 - Order w/10V	0 - Order w/10V	0 - Order w/10V
13L	N/A	S - Leave control Blank when ordering	N/A	S - Leave control Blank when ordering	N/A	N/A	0 - Order w/10V	0 - Order w/10V	0 - Order w/10V
20L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	S - Order w/10V
30L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	S - Order w/10V
40L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	S - Order w/10V

Control Availability Chart Cont'd.

LES Dimming to 1%			
Lumen Package	120V	277V	347V
9L	N/A	N/A	0 - Order w/LES
13L	0 - Order w/LES	0 - Order w/LES	0 - Order w/LES
20L	0 - Order w/LES	0 - Order w/LES	0 - Order w/LES
30L	0 - Order w/LES	0 - Order w/LES	0 - Order w/LES
40L	0 - Order w/LES	0 - Order w/LES	0 - Order w/LES

S = Standard Offering
 0 = Optional Offering