



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	16W
120V	0.15A	Color Temp	2700/3000/3500/4000/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	1,150
Input Watts	16W	Efficacy	71.5

Technical Specifications		
Performance		
Product Type: Surface & Flush Mounts	R9 Value: High color performance with R9 greater than or equal to 50	THD: ≤20%
Input Wattage: 16W	Compliance	Power Factor: ≥0.9
Lumens (Nominal): 1150lm	UL Listed: Suitable for wet locations	Flicker: ≤30%
Efficacy: 71.5 lm/W	ENERGY STAR V2.2: This product is ENERGY STAR® Version 2.2 Certified.	Input Voltage: 120V
L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results	Energy Star ID: 2389554	
	Electrical	
	Dimming Driver: TRIAC compatible dimmer with dimming as low as 10%.	

Technical Specifications (continued)

Electrical

Operating Frequency:

60Hz

Construction

Material:

Plastic

Trim Style:

Smooth Trim

Shape:

Round

Beam Angle:

120°

Mounting:

Surface mount

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Size:

11"

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

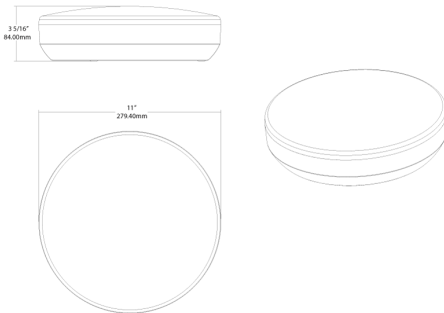

Features

- Surface Mount to ceiling or wall
- Field adjustable "set and forget" color temperature
- Diffused lens provides soft, smooth light
- Ideal for hospitality and multi-family residential applications
- Triac and 0-10V dimming options
- Suitable for wet and damp locations
- 50,000-Hour lifespan

Ordering Matrix

Family	Type	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Sensor
CRVFA	S	11	R	16	9CCT	120	W	
	S = Smooth D = Decorative	11 = 11" 12 = 12" 14 = 14" 18 = 18" 19 = 19"	R = Round	16 = 16W 20 = 20W 32 = 32W	9CCT = 90 CRI, CCT Selectable	120 = 120V UNV = 120-277V	W = White BN = Brushed Nickel	Blank = No Sensor /MVS = Microwave Occupancy Sensor