

NM2-2RG

2" M2 Round LED Recessed Gimbal

Source: 6W or 8W LED
400lm or 600lm

PRODUCT DESCRIPTION

M2 downlight series features quality and convenience with easy installation for insulated or non-insulated applications. Luminaires can be configured into square trim with an accessory and produces over 600 lumens.

FEATURES

- 15° Adjustable
- No housing required - IC Air-Tight rated
- Easy installation for remodel or new construction applications
- Square trim available for an alternative appearance
- Quick disconnect allows for extended lengths
- 400lm or 600lm LED packages
- 2700K, 3000K or 4000K @ 90+ CRI
- Triac or ELV dimming
- 5-year limited warranty
- ENERGY STAR certified
- cETLus Listed for Damp Locations

SPECIFICATION

Construction: Die-cast aluminum trims available in matte black or matte powder white finish. Gimbal trim is adjustable up to 15°. Optional field changeable square trim is available.

Air Flow Restriction: Luminaire has factory installed gasket to restrict airflow from room into ceiling plenum to <2CFM (cubic feet per minute) in accordance with ASTM-283 Air-Tight requirements.

Clearance: IC rated luminaires are rated for direct contact with insulation (not spray foam insulation), no minimum clearance is required.

Junction Box: Prewired junction box includes quick connect to LED fixtures for ease of installation. Junction box includes two 1/2" trade size knockouts and snap on cover with 7" quick connect wire. Luminaire includes 5" quick connect wire.

Mounting: No housing is required, two tensions steel spring clips secure luminaire to ceiling. Accommodates ceiling thickness up to 3/4". New construction frame-in kit is available, see accessories.

ELECTRICAL	40	60
Input Voltage	120V	
Input Power	6W	8W
Color Temperature	2700K or 3000K	2700K, 3000K, 4000K
Color Rendering Index	90+ CRI	
Dimming	Triac / ELV	
Operating Temp.	40°C max.	
Beam Spread	40° Flood	
Lifetime	60,000 hours @ L70	

OPTIONAL TRIM ACCESSORIES

NM2-2SGT: Square Trim for NM2-2RG, Black or White

OPTIONAL MOUNTING ACCESSORIES

NF-R246: Universal New Construction Frame-In

NM2-MLS1: One Head Multiple Lighting System Plate

NM2-MLS2: Two Head Multiple Lighting System Plate

NM2-MLS3: Three Head Multiple Lighting System Plate

NM2-2R-F: New Construction Frame-In Plate

NM2-EW-4: 4' Quick Connect Linkable Extension Cable

NM2-EW-10: 10' Quick Connect Linkable Extension Cable

LABELS AND LISTINGS

- cETLus Listed for Damp Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2019



Type _____

Project _____

Catalog No. _____

Notes _____

PRODUCT IMAGES AND DIMENSIONS





NM2-2RGMPW
Matte Powder White

NM2-2RGMPW + NM2-2SGT
Matte Powder White



NM2-2RGBB
Matte Black

NM2-2RGBB + NM2-2SGT
Matte Black

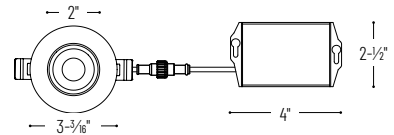

NM2-2SGT
Square Trim

2" M2 Round LED Recessed Gimbal

Trim Type	Lumens / Wattage	Color Temperature / CRI	Finish
NM2-2RG = 2" Round Gimbal	40 = 400lm / 6W	27 = 2700K / 90 CRI	BB = Matte Black
	60 = 600lm / 8W	30 = 3000K / 90 CRI	MPW = Matte Powder White
	60 = 600lm / 8W	40 = 4000K / 90 CRI	MPW = Matte Powder White

M2 Trim Accessories

Accessory Type	Finish
NM2-2SGT = Square Trim for NM2-2RG	B = Matte Black MPW = Matte Powder White

Optional Mounting Accessories

Accessory Type	Finish
NM2-MLS1 = One Head MLS Plate	BB = Matte Black
NM2-MLS2 = Two Head MLS Plate	MPW = Matte Powder White
NM2-MLS3 = Three Head MLS Plate	
NF-R246 = Universal New Construction Frame-In	
NM2-2R-F = New Construction Frame-In Plate	
NM2-EW-4 = 4' Quick Connect Extension Cable	
NM2-EW-10 = 10' Quick Connect Extension Cable	

Example: **NM2-2RG6030MPW** = 2" M2 Round LED Recessed Gimbal, 600lm / 8W, 3000K / 90 CRI, Matte Powder White

NM2-2RG

2" M2 Round LED Recessed Gimbal Accessories

Type	
Project	
Catalog No.	
Notes	



Square Trim for NM2-2RG

NM2-2SGTB Matte Black
NM2-2SGMPW Matte Powder White
 Converts the round trim included with NM2-2RG gimbal into a square trim




Multiple Lighting System Plates

NM2-MLS1B 1 Head / Matte Black
NM2-MLS1PW 1 Head / Matte Powder White
NM2-MLS2B 2 Head / Matte Black
NM2-MLS2PW 2 Head / Matte Powder White
NM2-MLS3B 3 Head / Matte Black
NM2-MLS3PW 3 Head / Matte Powder White
 Converts multiple round LED luminaires into multiple lighting system without a large housing.



New Construction Frame-In Plate

NM2-2R-F
 For new construction pre-wiring and easier layout planning.




Quick Connect Extension Linkable Cables

NM2-EW-4 4' Cable
NM2-EW-10 10' Cable
 Use to extend the length between luminaire and driver enclosure. Can be connected together to create custom lengths. Maximum length between luminaire and driver is 40'.



Universal New Construction Frame-In
NF-R246

Universal new construction frame-in can be used to assist installing can-less recessed downlighting.



PHOTOMETRICS

2" M2 Round LED Recessed Gimbal

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR11356
 Part Number: NM2-2RG4027MPW
 Beam Spread: 40° Flood
 Lumens: 486lm
 Wattage: 6.3W
 Efficacy: 77lpw
 CCT / CRI: 2700K / 90 CRI
 Spacing Criteria (0°-180): 0.66
 Spacing Criteria (90°-270): 0.64



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	217fc	1'-6"
4'	54.2fc	3'
6'	24.1fc	4'-5"
8'	13.6fc	5'-11"
10'	8.7fc	7'-5"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	373	76.7
0-40	439	90.2
0-60	471	96.9
0-90	484	99.5
90-180	2	0.5
0-180	486	100

Candela Table

Vertical Angles	Candela
0	867
5	827
15	598
25	302
35	109
45	28

Test Information

Test Number: NTR11365
 Part Number: NM2-2RG4030MPW
 Beam Spread: 40° Flood
 Lumens: 514lm
 Wattage: 6.3W
 Efficacy: 82lpw
 CCT / CRI: 3000K / 90 CRI
 Spacing Criteria (0°-180): 0.66
 Spacing Criteria (90°-270): 0.66



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	233fc	1'-6"
4'	58.3fc	2'-11"
6'	25.9fc	4'-5"
8'	14.6fc	5'-11"
10'	9.3fc	7'-5"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	400	77.9
0-40	467	90.8
0-60	499	97
0-90	512	99.5
90-180	2	0.5
0-180	514	100

Candela Table

Vertical Angles	Candela
0	932
5	891
15	637
25	315
35	106
45	25

Test Information

Test Number: NTR11354
 Part Number: NM2-2RG6027MPW
 Beam Spread: 40° Flood
 Lumens: 598lm
 Wattage: 7.7W
 Efficacy: 77lpw
 CCT / CRI: 2700K / 90 CRI
 Spacing Criteria (0°-180): 0.66
 Spacing Criteria (90°-270): 0.66



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	274fc	1'-5"
4'	68.5fc	2'-11"
6'	30.4fc	4'-4"
8'	17.1fc	5'-10"
10'	11fc	7'-2"

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	465	77.8
0-40	541	90.5
0-60	580	97
0-90	595	99.5
90-180	3	0.5
0-180	598	100

Candela Table

Vertical Angles	Candela
0	1095
5	1046
15	745
25	360
35	117
45	31

Test Information

Test Number: NTR11355
 Part Number: NM2-2RG6030MPW
 Beam Spread: 40° Flood
 Lumens: 658lm
 Wattage: 7.9W
 Efficacy: 83lpw
 CCT / CRI: 3000K / 90 CRI
 Spacing Criteria (0°-180): 0.64
 Spacing Criteria (90°-270): 0.64



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	305fc	1'-5"
4'	76.4fc	2'-11"
6'	33.9fc	4'-4"
8'	19.1fc	5'-10"
10'	12.2fc	7'-2"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	514	78
0-40	596	90.5
0-60	639	97.1
0-90	655	99.5
90-180	3	0.5
0-180	658	100

Candela Table

Vertical Angles	Candela
0	1222
5	1665
15	828
25	393
35	127
45	35