

Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long Life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes non-shunted(rapid start) sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- 5 Year Warranty




Flex™
Internal Driver LED FT Lamp
Commercial Grade LED FT Lamp

Specification Data

Model No.	Replace	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Lamp Efficacy	Life (hours)
LT40W/830-ID	FT40W	18	120-277	3000	2160	83	120	50000
LT40W/835-ID	FT40W	18	120-277	3500	2160	83	120	50000
LT40W/840-ID	FT40W	18	120-277	4000	2160	83	120	50000
LT40W/850-ID	FT40W	18	120-277	5000	2160	83	120	50000

Wiring Diagram

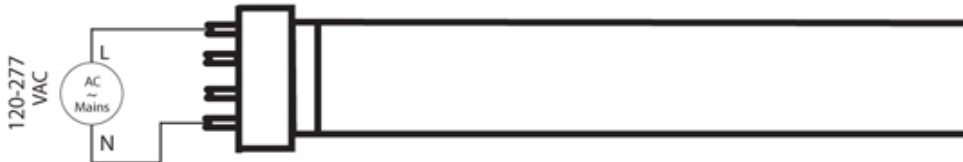

Dimension

Model No.	Length (inches)	Width (inches)	Height (inches)
LT40W/830-ID	21.06	1.73	0.94
LT40W/835-ID	21.06	1.73	0.94
LT40W/840-ID	21.06	1.73	0.94
LT40W/850-ID	21.06	1.73	0.94

DLC Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
LT40W/830-ID	PLH2YZ77E7S7	LT40W/830-ID	5
LT40W/835-ID	PL9RO5F4B762	LT40W/835-ID	5
LT40W/840-ID	PLQDM97CJWAI	LT40W/840-ID	5
LT40W/850-ID	PLORYM7UD48A	LT40W/850-ID	5