

PRODUCT FEATURES



STARTING METHOD: Program	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F96T8HO (86W)	2	120	152.0	1.28	0.99	<1.70	0.80	0.53	10	F2-1
		277	152.0	0.56	0.98	<1.70	0.80	0.53	10	F2-1
	1	120	92.0	0.78	0.99	<1.70	0.91	0.99	10	F1-13
		277	93.0	0.35	0.96	<1.70	0.91	0.99	15	F1-13
F72T8/HO (66W)	2	120	113.0	0.96	0.99	<1.70	0.77	0.68	10	F2-1
		277	114.0	0.42	0.98	<1.70	0.77	0.68	12	F2-1
	1	120	71.0	0.60	0.99	<1.70	0.91	1.28	10	F1-13
		277	71.0	0.27	0.96	<1.70	0.91	1.28	15	F1-13
F60T8/HO (56W)	2	120	97.0	0.82	0.99	<1.70	0.76	0.78	10	F2-1
		277	97.0	0.36	0.98	<1.70	0.76	0.78	12	F2-1
	1	120	63.0	0.53	0.99	<1.70	0.90	1.43	10	F1-13
		277	63.0	0.24	0.95	<1.70	0.90	1.43	15	F1-13
F48T8/HO (44W)	2	120	77.0	0.65	0.99	<1.70	0.75	0.97	10	F2-1
		277	77.0	0.29	0.95	<1.70	0.75	0.97	15	F2-1
	1	120	50.0	0.43	0.99	<1.70	0.87	1.74	10	F1-13
		277	51.0	0.20	0.93	<1.70	0.87	1.70	15	F1-13

WIRING DIAGRAMS

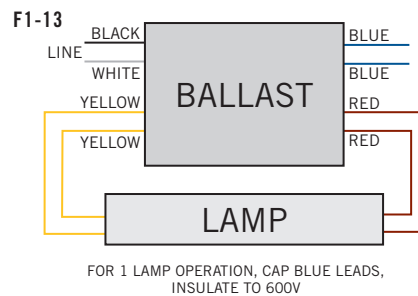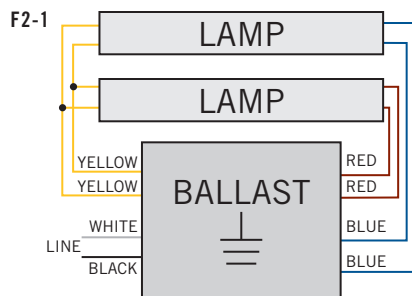




KTEB-286HO-UV-PS-N

T8HO ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

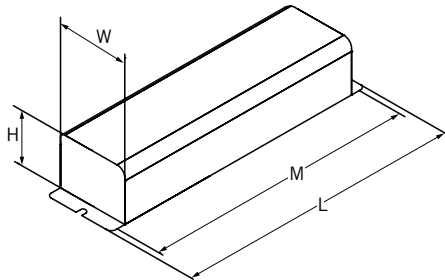

CASE DIMENSIONS

LENGTH: 9.50"
WIDTH: 2.36"
HEIGHT: 1.69"
MOUNTING: 8.84"
UNIT WEIGHT: 2.85 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 58.00" X 58.00"
RED: 58.00" X 58.00"
YELLOW: 66.00" X 66.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION



ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-286HO-UV-PS-N-CP	Carton	10	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-286HO-UV-PS-N

