



KTEB-126-1-TP-LC

COMPACT FLUORESCENT BALLAST



DESCRIPTION

1 x 26W CFL | 120V | Normal Power Factor | Rapid Start | Long Case

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast Frequency for All Listed Lamps: 20KHz-33KHz
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD	WIRING DIAGRAM
CFQ26W/G24q	1	120	24	0.40	0.54	<1.70	0.90	3.75	150	P1-1
CFS28W/GR10q	1	120	26	0.40	0.58	<1.70	0.90	3.46	130	P1-1
F32T8	1	120	32	0.45	0.59	<1.70	0.95	2.97	130	P1-1
F25T8	1	120	25	0.37	0.57	<1.70	0.95	3.80	130	P1-1
F19T5 (28" or 30")	1	120	18	0.29	0.52	<1.70	1.00	5.56	150	P1-1
F18T5 (24" or 26")	1	120	17	0.27	0.52	<1.70	1.00	5.88	160	P1-1
F17T8	1	120	18	0.27	0.54	<1.70	1.00	5.55	150	P1-1
F15T8	1	120	16	0.26	0.52	<1.70	1.00	6.25	150	P1-1
F13T8	1	120	16	0.26	0.51	<1.70	1.10	6.88	160	P1-1
FC9T5	1	120	23	0.35	0.55	<1.70	1.05	4.57	140	P1-1

WIRING DIAGRAMS

P1-1

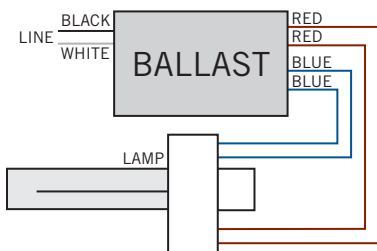




KTEB-126-1-TP-LC

COMPACT FLUORESCENT BALLAST

HOT SPOT LOCATION

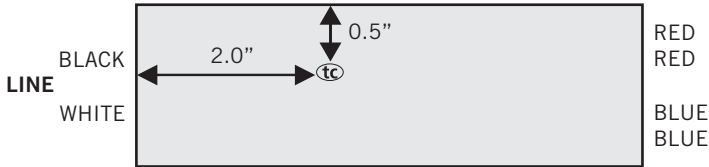

Actual tc point is noted on each ballast label.

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	6.46"
	WIDTH	1.89"
	HEIGHT	1.15"
	MOUNTING	6.00"
	CASE STYLE	L2

STANDARD LEAD LENGTHS*

BLACK	20"
WHITE	20"
BLUE	32"
RED	48"

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-126-1-TP-LC-CP	Carton Pack	TBD	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-126-1-TP-LC-CP

