



Performance Specification

Class P

No PCB's

Type 1 Outdoor


Sound Rated Class A

Normal Power Factor

| BB-T8/120-2x32W/NPF (TP120-2/32 IS NPF) | |
|--|---------------|
| Ballast Type | Electronic |
| Starting Method | Instant Start |
| Lamp Connection | Parallel |
| Input Voltage | 120V |
| Input Frequency | 60Hz |


| Lamp Type | Num.of Lamps | Lamp Watts | Min.Start Temp | Input Current | Input Power | THD | Power Factor | Lamp Current Crest Factor |
|-----------|--------------|------------|----------------|---------------|-------------|-------|--------------|---------------------------|
| F32T8 | 2 | 32 | -18°C | 0.85A | 57W | <150% | >0.85 | <1.7 |
| F25T8 | 2 | 25 | -18°C | 0.70A | 47W | <150% | >0.85 | <1.7 |

Wiring Diagram

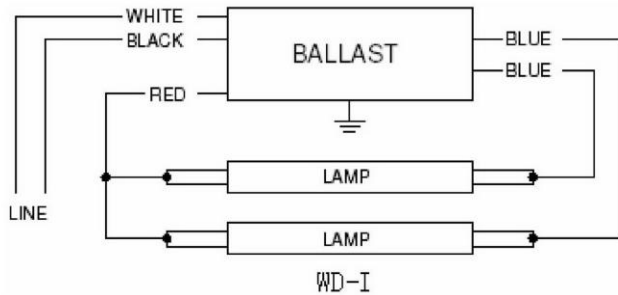

| | mm |
|---------|------|
| Blackx1 | 650 |
| Whitex1 | 650 |
| Redx1 | 1000 |
| Bluex4 | 800 |

Case

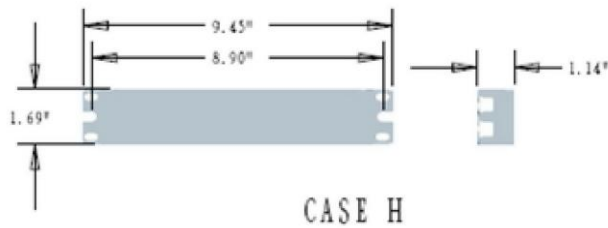

| Overall(L) | Width(W) | Height(H) | Mounting(M) |
|------------|-----------|-----------|-------------|
| 9.45 inch | 1.69 inch | 1.14 inch | 8.90 inch |