


Version	V2.0	Date	8/15/2022
Prepared By	J.C		

PRODUCT SPECIFICATION	
Category	Slim Area Light
Item Number	9647
Stock Code	FXSAL75SW/8CCT3/BZ/T3/480
Mounting	Pole Mount / Slip Fitter / Yoke Mount/ Wall Mount
Housing Color	Bronze (RAL# 8019)

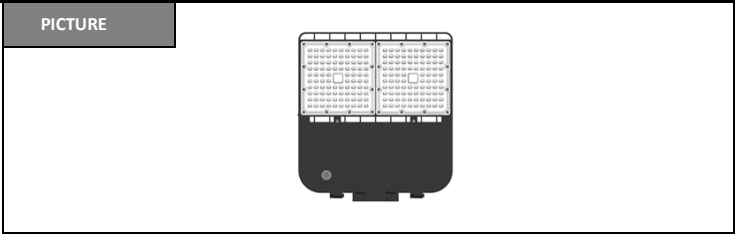

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	75/50/25	Replacement Wattage (W)	100W-400W
Tested Wattage (W)	-		
Input Voltage (V)	277~480	Surge Protect Level	10KV
Voltage Frequency (Hz)	50/60HZ		
Input Current (A)	0.3	Dimmable	0 - 10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	10500/7000/3500	CCT (K)	selectable 3000/4000/5000K
Efficacy (lm/w)	140lm/w	Beam Angle (°)	Type III
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40 ~ 122
Storage Temperature (°F)	-40~140
IP Rating	IP66
Rated Life	50000 hrs.
Warranty	5 Years

ACCESSORIES		
Item #	Stock Code	Description
P10453	MT-AL/PM6/BZ	Mount - Area Light Pole Mount 6" Bronze
P10455	MT-AL/SF/BZ	Mount - Area Light Slip Fitter Bronze
P10456	MT-SAL/YK12/BZ	Mount - Area Light Yoke mount 12" Bronze
P10473	MT-AL/WM/BZ	Mount - Area Light wall mount Bronze
P10371	SEN-BRI619	Sensor - 0-10V IP66 12-24V IR head
P10467	LENS-SAL-T4-G1	Lens - Type IV lens

PRODUCT DIMENSIONS		
Length- in (mm)	14.2" (360mm)	
Width- in (mm)	12.01" (307mm)	
Height- in (mm)	2.6" (66mm)	
EPA (ft²)	0.212 ft² (@ 0 deg)	
Weight (lbs)	8 lbs	
Mounting Height (ft)	10-15ft	
Cable Length (ft)	1.64ft	

CERTIFICATIONS			
UL/ETL	ETL, cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	YES
DLC	V5.1 Premium	RoHs	YES

DOCUMENTS			
LM79	YES	IES File	YES
LM80	YES	Dimmer List	

COMMENTS