


PIN-BASE
RETROFITS



HYBRID TOTALTUBE T5 G4 CAN BE USED WITH OR WITHOUT A BALLAST



shatterproof ↑
glass lens

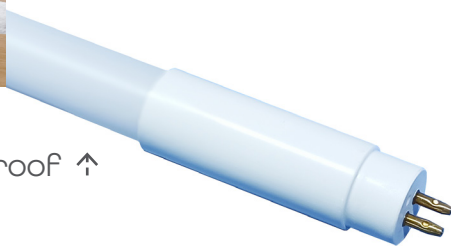

- > 2 methods of installation (UL Type A + B).
- > Can use with a ballast or bypass the ballast.
- > Single or double ended.
- > New wide 240° beam angle.
- > Available in 2 ft, 3ft & 4ft lengths
- > Suitable for dry & damp locations.
- > Shatterproof glass construction
- > Frosted lens.
- > UL classified retrofit fit listed
- > 5 year standard warranty, L70 > 50,000 HRS.



**120/
277V**
ALSO WORKS
ON 208V & 240V

UL TYPE B
BALLAST
BYPASS
INSTALL
METHOD

UL TYPE A
BALLAST
COMPATIBLE
INSTALL
METHOD

80+
CRI

240°
BEAM ANGLE

-4°F TO 113°F
OPERATING
TEMP

**<15%
THD**
>0.99
PWR FACTOR

L70
50,000hrs
RATED LIFE




PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR*	BASE
RP-TOTALTUBE-T5-2FT-840-G4	844006079864	24W FL	12W	1500	4000K	G5
RP-TOTALTUBE-T5-3FT-840-G4	844006079895	39W FL	18W	2250	4000K	G5
RP-TOTALTUBE-T5-4FT-840-G4	844006079925	54W FL	24W	3500	4000K	G5

* additional color temperatures shown on page 2





TOTALTUBE T5 G4



PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE
RP-TOTALTUBE-T5-2FT-835-G4	844006079857	24W FL	12W	1350	3500K	G5
RP-TOTALTUBE-T5-2FT-840-G4	844006079864	24W FL	12W	1500	4000K	G5
RP-TOTALTUBE-T5-2FT-850-G4	844006079871	24W FL	12W	1500	5000K	G5
RP-TOTALTUBE-T5-3FT-835-G4	844006079888	39W FL	18W	2025	3500K	G5
RP-TOTALTUBE-T5-3FT-840-G4	844006079895	39W FL	18W	2250	4000K	G5
RP-TOTALTUBE-T5-3FT-850-G4	844006079901	39W FL	18W	2250	5000K	G5
RP-TOTALTUBE-T5-4FT-835-G4	844006079918	54W FL	24W	3200	3500K	G5
RP-TOTALTUBE-T5-4FT-840-G4	844006079925	54W FL	24W	3500	4000K	G5
RP-TOTALTUBE-T5-4FT-850-G4	844006079932	54W FL	24W	3500	5000K	G5