

# C-WM-B-WLHO Series

## C-Lite LED Wall Mount

Replaces 100W PSMH

**C-LITE**  
LED LIGHTING

### EFFICIENCY TO THE MAX

Wet listed and a breeze to install, our LED Wall Mount features an included dusk to dawn photocell, skyrocketing your client's energy savings. For high precision, its unique mirror-like reflector helps direct light only where needed. Choose from 4000K or 5000K and white or medium bronze housings.



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 3120L
- CRI:  $\geq 70$  CRI
- CCT: Neutral White 4000K, Cool White 5000K
- Input Power: 24W LED
- Dimmable: No
- Operating Range: -25°C 30°C (-13°F 86°F)
- Lifespan: Estimated >50,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 30%
- Limited Warranty: 5-Years\*
- Replaces 100W PSMH

FEATURES	BENEFITS	RECOMMENDED USE
<ul style="list-style-type: none"><li>• Unique mirror like reflector will help throw the light in needed direction</li><li>• Brand Name photocell that is tested to last the life of the product</li><li>• Newest generation improving efficiency</li></ul>	<ul style="list-style-type: none"><li>• Most efficient Mini Wall Pack offered to date</li><li>• Dusk to Dawn photocell sensor included</li><li>• Now Available in White and Bronze</li><li>• Photocell is good for 120-277v</li></ul>	<ul style="list-style-type: none"><li>• Security</li><li>• Perimeter</li><li>• Retail</li></ul>

### ORDERING INFORMATION

Example: C-WM-B-WLHO-31L-50K-MB-P

C-WM	B	WLHO	31L			P
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	COLOR	PHOTOCELL
C-WM	B	WLHO LED Wall Mount	31L 3120 Lumens (24W)	40K Neutral White (4000K) 50K Cool White (5000K)	WH White MB Medium Bronze	P

### CERTIFICATIONS:

US: creeledlighting.com, e-conolight.com


Distribution/Sales: 855-617-2733 Customer Services: 888-243-9445

Rev. Date: V6 R1 04/10/2020

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details



# C-WM-B-WLHO Series

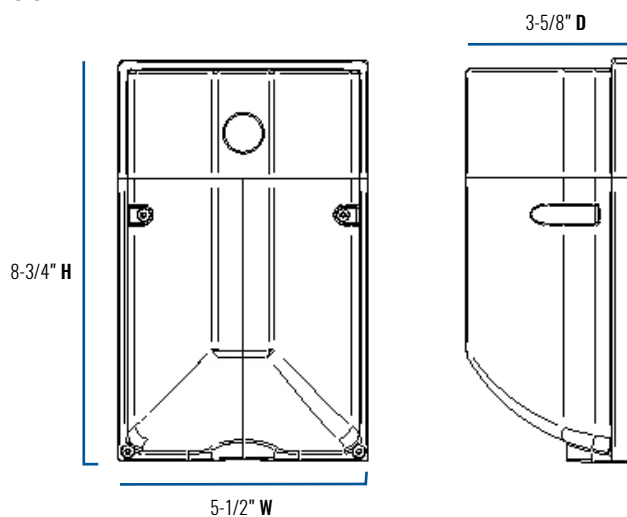

## SERIES OVERVIEW

SKU	DIMENSIONS	PRODUCT WEIGHT
C-WM-B-WLHO-31L-50K-MB-P	3 5/8" <b>D</b> x 5 1/2" <b>W</b> x 8 3/4" <b>H</b>	2.7 lbs.
C-WM-B-WLHO-31L-40K-MB-P		
C-WM-B-WLHO-31L-50K-WH-P		
C-WM-B-WLHO-31L-40K-WH-P		

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Durable, aluminum housing with integrated junction box allows for easy installation. White or medium bronze polyester powder-coat finish.
<b>LENS ASSEMBLY</b>	Polycarbonate lens
<b>MOUNTING</b>	Mounts to 4-inch square or octagonal j-box. Contains (1) 1/2-inch NPT threaded knockout on bottom of fixture for surface wiring.

## ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-25°C to -30°C (-13°F to 86°F)	Estimated >50,000 Hours	> 0.9	< 30%	No

INPUT VOLTAGE	LUMEN PACKAGE	120V	208V	240V	277V
<b>CURRENT DRAW</b> (Amps)	31L	0.1A	0.06A	0.05A	0.04A

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# C-WM-B-WLHO Series

## WARRANTY & CERTIFICATIONS

WARRANTY	cULus	DLC
5-Year Limited*	Wet Locations	Yes, Premium

© 2020 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-LITE® and the C-LITE logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC. The DLC Premium QPL logo is a registered trademark of Efficiency Forward, Inc.

US• [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales: 855-617-2733 Customer Services: 888-243-9445

Rev. Date: V6 R1 04/10/2020

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING