

SD Series Round & Square Slim LED Downlights - 4", 6", 8"

Product Specifications

CONSTRUCTION & MATERIALS

- Aluminum and iron downlight housing
- Remote mounted iron J-Box connects to downlight with a low voltage cable
- Includes housing clips for easy installation
- Suitable for ceilings 0.59" (15mm) to 0.79" (20mm) thick
- Includes 16" (mm) of cable between downlight and j-box. Extension accessories available

OPTICAL SYSTEM

- Unique combination of optical components achieves a uniform, comfortable appearance while eliminating pixelation and color fringing. This ensures smooth light patterns are projected with no hot spots and minimal striations
- Components work together to optimize distribution, balancing the delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces.
- Edge-lit LEDs, plastic light guide plate and diffuser lens shields direct view of LEDs
- CCT is adjustable via a switch on the j-box in the field to meet the requirements of numerous applications
- Beam Angle: 113° (included angle between points of 50% of maximum intensity)

ELECTRICAL SYSTEM

- **Power Factor:** > 0.9 at full load and 120V
- **Total Harmonic Distortion:** < 30% at full load
- **Input Voltage:** 120-277V, 50/60hz
- **Dimming:** Triac/0-10V Dimming to 5% compatible with SmartCast® Technology, and Lutron Vive through 0-10V interface
- **Compatible Triac Dimmers:** Lutron TGCL-153P, CTCL-153P, DVCL-153P, MACL-153M; Leviton 6674-P0, 6672-1L, IPL06-10
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- **Operating Temperature Range:** -25°C to +40°C (-13° F - +104° F)

REGULATORY & VOLUNTARY QUALIFICATIONS

- cETLus Listed
- 4" and 8" luminaires are suitable for damp locations for covered ceilings only
- 6" luminaires are suitable for wet locations for covered ceilings only
- Meets NEMA C82.77 standards
- Suitable for insulated (IC) and non-insulated (non-IC) ceilings
- Non-plenum rated
- Requires minimum 90°C supply conductors
- Meets FCC Part 15, Subpart B, Class A and Class B limits for conducted and radiated emissions
- ENERGY STAR® certified. Please refer to <https://www.energystar.gov/productfinder/product/certified-light-fixtures/results> for most current information
- Meets CA Title 24 JA8 Requirements
- RoHS Compliant. Consult factory for additional details
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

Electrical Data*					
Lumen Package	System Watts 120-277V	Total Current (A)			
		120V	208V	240V	277V
7L	12	0.10	0.08	0.07	0.06
11L	16	0.13	0.09	0.08	0.07
18L	22	0.18	0.12	0.10	0.09

* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%.

Initial Delivered Lumens*				
Lumen Package	2700K/3000K		3500K/4000K/5000K	
	Initial Delivered Lumens*	Efficacy (LPW)	Initial Delivered Lumens*	Efficacy (LPW)
7L	830	69	920	77
11L	1,350	84	1,490	93
18L	2,070	94	2,280	104

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens.

SD Series Ambient Adjusted Lumen Maintenance ¹					
Ambient	Initial LMF	25K hr Reported ² LMF	50K hr Reported ² LMF	75K hr Estimated ³ LMF	100K hr Estimated ³ LMF
0°C (32°F)	1.05	0.98	0.91	0.84	0.78
5°C (41°F)	1.04	0.97	0.90	0.84	0.78
10°C (50°F)	1.03	0.96	0.89	0.83	0.77
15°C (59°F)	1.02	0.95	0.88	0.82	0.76
20°C (68°F)	1.01	0.94	0.87	0.81	0.75
25°C (77°F)	1.00	0.93	0.87	0.80	0.75
30°C (86°F)	0.99	0.92	0.85	0.78	0.72
35°C (95°F)	0.98	0.91	0.83	0.77	0.70
40°C (104°F)	0.97	0.89	0.82	0.75	0.68

¹ Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors.

² In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

³ Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.

Installation

- Quick install system using the housing clip system for easy install into ceiling
- Refer to www.creelighting.com for complete install instructions


Cutout Dimensions		
Size	SDR Round Cutout Dimensions	SDS Square Cutout Dimensions
4"	4-11/32" (110mm)	4-11/32" (110mm) x 4-11/32" (110mm)
6"	6-1/4" (158mm)	6-1/4" (158mm) x 6-1/4" (158mm)
8"	8-5/16" (211mm)	8-5/16" (211mm) x 8-5/16" (211mm)

SD Series Round & Square Slim LED Downlights - 4", 6", 8"

Photometry

SDR6-11L-9ACK-TRI10V-WH-UNV (3000K) BASED ON TEST #: PL16908-002A

Luminaire photometry has been conducted in accordance with IES LM-79. IES LM-79 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%

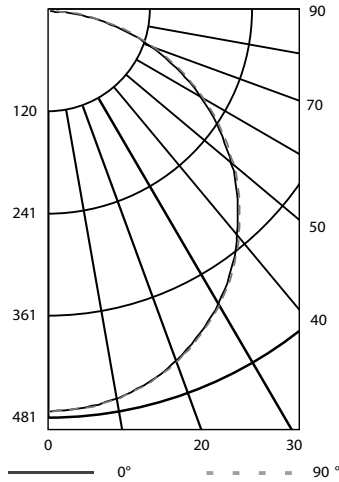

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	119	119	119	119
1	109	104	99	95
2	98	90	83	77
3	90	79	71	64
4	82	70	61	54
5	75	62	53	47
6	70	56	47	41
7	65	51	42	36
8	60	46	38	32
9	56	43	34	29
10	53	39	31	26

Effective Floor Cavity Reflectance: 20%

Average Luminance Table (cd/m2)			
Vertical Angle	Horizontal Angle		
	0°	45°	90°
45°	27,850	27,915	27,887
55°	26,791	26,805	26,774
65°	25,417	25,382	25,361
75°	23,153	23,131	22,988
85°	19,266	18,940	16,694


Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	372.53	N/A	27%
0-40	609.77	N/A	44.2%
0-60	1,078.10	N/A	78.1%
0-90	1,381.11	N/A	100%
0-180	1,381.11	N/A	100%

Reference creelighting.com/products/indoor/downlights/sd-series for detailed photometric data

Photometry

SDS6-11L-9ACK-TRI10V-WH-UNV (3000K) BASED ON TEST #: PL16907-001A

Luminaire photometry has been conducted in accordance with IES LM-79. IES LM-79 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%

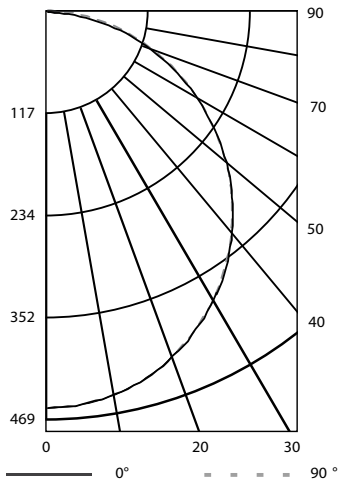

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	119	119	119	119
1	108	104	99	95
2	98	90	83	77
3	90	79	71	64
4	82	70	61	54
5	75	62	53	47
6	70	56	47	41
7	65	51	42	36
8	60	46	38	32
9	56	43	34	29
10	53	39	31	26

Effective Floor Cavity Reflectance: 20%

Average Luminance Table (cd/m2)			
Vertical Angle	Horizontal Angle		
	0°	45°	90°
45°	26,825	26,851	26,975
55°	25,747	25,801	25,962
65°	24,483	24,529	24,741
75°	22,611	22,675	22,865
85°	19,344	18,378	18,166

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	361.91	N/A	27%
0-40	591.25	N/A	44.2%
0-60	1,042.72	N/A	77.9%
0-90	1,338.54	N/A	100%
0-180	1,338.54	N/A	100%

Reference creelighting.com/products/indoor/downlights/sd-series for detailed photometric data

SD Series Round & Square Slim LED Downlights - 4", 6", 8"

Application Reference

SDR

Open Space						
Spacing	Lumen Package	Lumens	Wattage	LPW	w/ft2	Average fc
4 x 4	7L	830	12	69	0.72	47
6 x 6	7L	830	12	69	0.34	22
8 x 8	7L	830	12	69	0.18	12
10 x 10	7L	830	12	69	0.12	8
4 x 4	11L	1,350	16	84	0.96	76
6 x 6	11L	1,350	16	84	0.45	35
8 x 8	11L	1,350	16	84	0.24	19
10 x 10	11L	1,350	16	84	0.16	13
4 x 4	18L	2,070	22	94	1.32	117
6 x 6	18L	2,070	22	94	0.62	54
8 x 8	18L	2,070	22	94	0.33	29
10 x 10	18L	2,070	22	94	0.22	20

10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial
Open Space: 50' x 40' x 10'

Corridor Space						
Spacing	Lumen Package	Lumens	Wattage	LPW	w/ft2	Average fc
4' OC	7L	830	12	69	0.50	18
6' OC	7L	830	12	69	0.34	12
8' OC	7L	830	12	69	0.24	9
10' OC	7L	830	12	69	0.20	7
4' OC	11L	1,350	16	84	0.67	29
6' OC	11L	1,350	16	84	0.45	20
8' OC	11L	1,350	16	84	0.32	14
10' OC	11L	1,350	16	84	0.27	12
4' OC	18L	2,070	22	94	0.92	45
6' OC	18L	2,070	22	94	0.62	31
8' OC	18L	2,070	22	94	0.44	22
10' OC	18L	2,070	22	94	0.37	18

10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial
Corridor Space: 6' x 100' x 10'

SDS

Open Space						
Spacing	Lumen Package	Lumens	Wattage	LPW	w/ft2	Average fc
4 x 4	7L	830	12	69	0.72	47
6 x 6	7L	830	12	69	0.34	22
8 x 8	7L	830	12	69	0.18	12
10 x 10	7L	830	12	69	0.12	8
4 x 4	11L	1,350	16	84	0.96	76
6 x 6	11L	1,350	16	84	0.45	35
8 x 8	11L	1,350	16	84	0.24	19
10 x 10	11L	1,350	16	84	0.16	13
4 x 4	18L	2,070	22	94	1.32	117
6 x 6	18L	2,070	22	94	0.62	54
8 x 8	18L	2,070	22	94	0.33	29
10 x 10	18L	2,070	22	94	0.22	20

10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial
Open Space: 50' x 40' x 10'

Corridor Space						
Spacing	Lumen Package	Lumens	Wattage	LPW	w/ft2	Average fc
4' OC	7L	830	12	69	0.50	18
6' OC	7L	830	12	69	0.34	12
8' OC	7L	830	12	69	0.24	9
10' OC	7L	830	12	69	0.20	7
4' OC	11L	1,350	16	84	0.67	29
6' OC	11L	1,350	16	84	0.45	20
8' OC	11L	1,350	16	84	0.32	14
10' OC	11L	1,350	16	84	0.27	12
4' OC	18L	2,070	22	94	0.92	45
6' OC	18L	2,070	22	94	0.62	31
8' OC	18L	2,070	22	94	0.44	22
10' OC	18L	2,070	22	94	0.37	18

10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial
Corridor Space: 6' x 100' x 10'

© 2022 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. Cree® and the Cree Lighting logo are registered trademarks of Cree, Inc. SmartCast® and the SmartCast logo are registered trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. ENERGY STAR® and the ENERGY STAR logo are registered trademarks of the U.S. Environmental Protection Agency. The ETL Listed Intertek logo is a trademark of Intertek Testing Services NA, Inc. Lutron, the Lutron logo, and Vive are trademarks or registered trademarks of Lutron Electronics Co., Inc.

US: creelighting.com (800) 236-6800
Canada: creelighting-canada.com (800) 473-1234



A COMPANY OF IDEAL INDUSTRIES, INC.