

SCREW-IN  
RETROFITS



## SHOE BOX & WALL PACK



LED  
8089m

includes support feet to prevent socket sag\*

- > 20W, 30W, 50W, 80W, and 110W models replacing up to 400W HID.
- > Light panel can rotate once the base is tightened to direct light out of the fixture.
- > Includes a fan and thermal sensor to run cool and ensure a long and bright life.
- > Enclosed fixture safe and approved for damp locations.
- > Available in 3000, 4000, and 5000K.
- > LED-8089D dims to 50% by selecting "LO" on the switch located on the top of the lamp only.
- > LED-8090-OCC is dimmable.
- > LED-8090-HV: 277-480V (can be used on 347V).



ALSO WORKS ON 208V & 240V



INSTALL METHOD



MEDIUM + MOGUL BASE



ACTIVE COOLING



CRI



-40°F to 122°F  
OPERATING TEMP



50,000hrs RATED LIFE



10kA SURGE PROTECTION

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR**	BASE
LED-8086E50-G4	844006047238	up to 70W HID	20W	2940	5000K	E26
LED-8087E50-G4	844006084288	up to 100W HID	30W	4255	5000K	E26
LED-8087M50-G4	844006084332	up to 100W HID	30W	4255	5000K	EX39
LED-8088E50-G4	844006083427	up to 175W HID	50W	7250	5000K	E26
LED-8088M50-G4	844006083472	up to 175W HID	50W	7250	5000K	EX39
LED-8089M50-G5	844006047078	up to 250W HID	80W	10850	5000K	EX39
LED-8089M50D-G5	844006077464	up to 250W HID	80W	10850	5000K	EX39
LED-8090M50-G4	844006083571	up to 400W HID	110W	14570	5000K	EX39
LED-8090M50-G4-T3	844006083915	up to 400W HID	110W	12840	5000K	EX39
LED-8090M50-G4-T4	844006083922	up to 400W HID	110W	12780	5000K	EX39
LED-8090M50-G4-OCC	844006047108	up to 400W HID	110W	14570	5000K	EX39
LED-8090M50-G4-HV	844006055479	up to 400W HID	110W	15390	5000K	EX39


\* LED-8089 & LED-8090 only

\*\* additional color temperatures shown on page 2





# SHOE BOX & WALL PACK

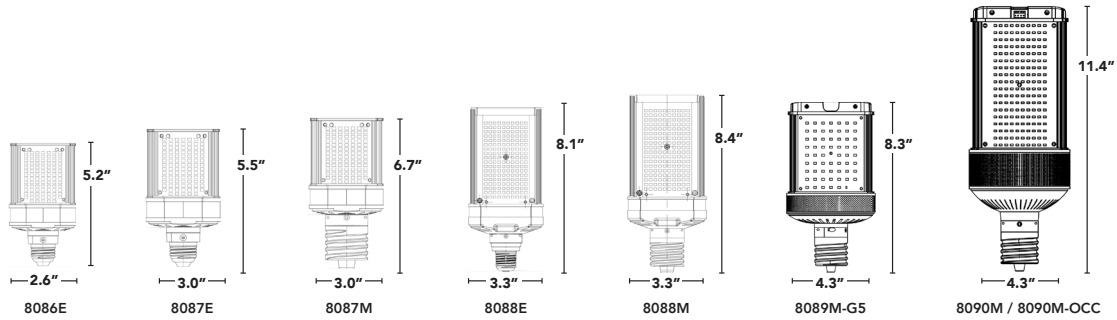

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DLC CODE
LED-8086E30-G4	844006047191	up to 70W HID	20W	2800	3000K	E26	N/A
LED-8086E40-G4	844006047214	up to 70W HID	20W	2800	4000K	E26	N/A
LED-8086E50-G4	844006047238	up to 70W HID	20W	2880	5000K	E26	N/A
LED-8087E30-G4	844006084257	up to 100W HID	30W	3534	3000K	E26	N/A
LED-8087E40-G4	844006084264	up to 100W HID	30W	4260	4000K	E26	N/A
LED-8087E50-G4	844006084288	up to 100W HID	30W	4255	5000K	E26	N/A
LED-8087M30-G4	844006084301	up to 100W HID	30W	3534	3000K	EX39	N/A
LED-8087M40-G4	844006084318	up to 100W HID	30W	4260	4000K	EX39	PDOT0PWM
LED-8087M50-G4	844006084332	up to 100W HID	30W	4255	5000K	EX39	PVFMGJKF
LED-8088E30-G4	844006083380	up to 175W HID	50W	6915	3000K	E26	N/A
LED-8088E40-G4	844006083403	up to 175W HID	50W	6460	4000K	E26	N/A
LED-8088E50-G4	844006083427	up to 175W HID	50W	7250	5000K	E26	N/A
LED-8088M30-G4	844006083434	up to 175W HID	50W	6915	3000K	EX39	PQUKT9XB
LED-8088M40-G4	844006083458	up to 175W HID	50W	6460	4000K	EX39	P49GKR40
LED-8088M50-G4	844006083472	up to 175W HID	50W	7250	5000K	EX39	PGIUKDDZ
LED-8089M30-G5	844006047030	up to 250W HID	80W	10670	3000K	EX39	N/A
LED-8089M40-G5	844006047054	up to 250W HID	80W	10760	4000K	EX39	PNHMQG8W
LED-8089M50-G5	844006047078	up to 250W HID	80W	10850	5000K	EX39	PS8LZWFD
LED-8089M30D-G5	844006077426	up to 250W HID	80W	10670	3000K	EX39	S-QLV506
LED-8089M40D-G5	844006077440	up to 250W HID	80W	10760	4000K	EX39	S-85HEUL
LED-8089M50D-G5	844006077464	up to 250W HID	80W	10850	5000K	EX39	S-ZXV3TR
LED-8090M30-G4	844006083533	up to 400W HID	110W	15745	3000K	EX39	P4AIACGH
LED-8090M40-G4	844006083557	up to 400W HID	110W	15430	4000K	EX39	P2TFMJ5G
LED-8090M50-G4	844006083571	up to 400W HID	110W	14570	5000K	EX39	PDLI2RJC
LED-8090M40-G4-T3	844006083892	up to 400W HID	110W	12630	4000K	EX39	PSPXBHZ5
LED-8090M40-G4-T4	844006083908	up to 400W HID	110W	12165	4000K	EX39	PA18YDOM
LED-8090M50-G4-T3	844006083915	up to 400W HID	110W	12840	5000K	EX39	PZF9RH41
LED-8090M50-G4-T4	844006083922	up to 400W HID	110W	12780	5000K	EX39	PDO0ZLSD
LED-8090M30-G4-OCC	844006051099	up to 400W HID	110W	15745	3000K	EX39	PBRCQBOX
LED-8090M40-G4-OCC	844006047092	up to 400W HID	110W	15430	4000K	EX39	PGR3PSL4
LED-8090M50-G4-OCC	844006047108	up to 400W HID	110W	14570	5000K	EX39	PHW4B08P
LED-8090M30-G4-HV	844006055455	up to 400W HID	110W	14620	3000K	EX39	N/A
LED-8090M40-G4-HV	844006055462	up to 400W HID	110W	15180	4000K	EX39	PRUB9Q89



# SHOE BOX & WALL PACK

🇨🇦 347 VOLT OPTIONS FOR CANADA 🇨🇦

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DLC CODE
LED-8086E40C-G4	844006047221	up to 70W	20W	2880	4000K	E26	N/A
LED-8086E50C-G4	844006047245	up to 70W	20W	2940	5000K	E26	N/A
LED-8087E40C-G4	844006084264	up to 100W HID	30W	4260	4000K	E26	N/A
LED-8087E50C-G4	844006084288	up to 100W HID	30W	4255	5000K	E26	N/A
LED-8087M40C-G4	844006084318	up to 100W HID	30W	4260	4000K	EX39	PNJMW8L
LED-8087M50C-G4	844006084332	up to 100W HID	30W	4255	5000K	EX39	PAT9UZ67
LED-8088E40C-G4	844006083397	up to 175W HID	50W	7250	4000K	E26	N/A
LED-8088E50C-G4	844006083410	up to 175W HID	50W	6915	5000K	E26	N/A
LED-8088M40C-G4	844006083441	up to 175W HID	50W	6460	4000K	EX39	PZVJVR6X
LED-8088M50C-G4	844006083465	up to 175W HID	50W	7250	5000K	EX39	PX2AKTYG
LED-8089M40C-G5	844006047061	up to 250W HID	80W	10500	4000K	EX39	P33X67RS
LED-8089M50C-G5	844006047085	up to 250W HID	80W	10675	5000K	EX39	P30ZQIRP
LED-8089M30CD-G5	844006077419	up to 175W HID	50W	7250	5000K	EX39	S-J2PX1N
LED-8089M40CD-G5	844006077433	up to 250W HID	80W	10500	4000K	EX39	S-8M3GFZ
LED-8089M50CD-G5	844006077457	up to 250W HID	80W	10675	5000K	EX39	S-7CFRKG
LED-8090M40C-G4	844006083540	up to 400W HID	110W	15430	4000K	EX39	PGYLLCXX
LED-8090M50C-G4	844006083564	up to 400W HID	110W	14570	5000K	EX39	P3U9L46N
LED-8090M40C-G4-T3	844006083939	up to 400W HID	110W	12630	4000K	EX39	P7OWSLYH
LED-8090M40C-G4-T4	844006083946	up to 400W HID	110W	12165	4000K	EX39	PQ1BR41U
LED-8090M50C-G4-T3	844006083953	up to 400W HID	110W	12840	5000K	EX39	P929E8A1

## OCC SENSOR INFORMATION

→ Motion sensing microwave sensor

→ Default setting:

100% sensitivity

Daylight sensor disabled

90 second hold time

5 minute twilight time and 30% twilight level

**MAIN CONTROLS**

- On/Off – permanent on/off, sensor disabled
- Dim – press to adjust up/down
- Auto – activate the sensor to last settings
- Reset – default settings

**HOLD TIME**

- Length of time at 100% when motion sensor activated

**TWILIGHT LEVEL (DIM LEVEL)**

- % of light output when dimmed



**SENSITIVITY**

- 100% is 8M (25 ft)

**DAYLIGHT SENSOR**

- Turns lamp on/off at certain lux level

**TWILIGHT TIME (DIM TIME)**

- Lengths of time lamp stays dimmed before turning off