

PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

DF Ultra Thin Recessed Downlight Series



DF Round



DF Square



PERFORMANCE INFORMATION

| SERIES NUMBER | WATT | LUMENS | SELECTABLE CCT | SIZE & SHAPE |
|-----------------|------|--------|---|--------------|
| DF 3R 5 G1 9FS | 8W | 500 | 2700K 3000K 3500K 4000K 5000K | 3" Round |
| DF 4R 7 G1 9FS | 10W | 650 | | 4" Round |
| DF 6R 9 G1 9FS | 12W | 900 | | 6" Round |
| DF 8R 15 G1 9FS | 18W | 1,500 | | 8" Round |
| DF 4S 7 G1 9FS | 10W | 650 | | 4" Square |

Increase savings and time with the innovative **DF Ultra Thin Recessed Downlight Series** that comes in 3", 4", 6", 8" round and square sizes. This extremely thin downlight is a little over half an inch and can be virtually installed anywhere especially in applications with shallow ceiling plenum. Versatile and easy to install, the **DF Downlight Series** does not require any housing. Attached is a compact remote driver with a CCT Selectable switch offering a range between 2700K to 5000K. This downlight is an excellent choice for retrofits and remodels.

APPLICATIONS

Residential, Educational, and Retail applications, etc.

REPLACEMENT

50-100W PAR

| ORDERING GUIDE | | Generation | Voltage | CRI and Selectable CCT* | Flange Finish |
|--|--|------------|--------------------|---------------------------------------|---------------------|
| DF Ultra Thin Recessed Downlight Series | 3R 3" Round 5 500 (8W) | G1 | BLANK =120V | 9FS = 90 CRI Selectable CCT | BLANK =White |
| | 4R 4" Round 7 650 (10W) | | | | |
| | 6R 6" Round 9 900 (12W) | | | | |
| | 8R 8" Round 15 1,500 (18W) | | | | |
| | 4S 4" Square 7 650 (10W) | | | | |

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

CONSTRUCTION

Die cast aluminum housing with white baffle trim and flange.

AMBIENT TEMPERATURE

Suitable for use in -20°C to +45°C (-4°F to 113°F)

MOUNTING

Recessed mounting. Does not require existing housing.

EFFICACY

Up to 83 lumens per watt (see individual wattage data).

CCT AND CRI

Selectable CCT 27K/30K/35K/40K/50K; 90+CRI

LENS

PC lens.

LIFE

Rated for 50,000 hours at 70% lumen maintenance.

WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

Standard Input Voltage 120V/60Hz with TRIAC dimming.


FLANGE

White finish.

CERTIFICATIONS


ENERGY STAR® Certified. ETL pending. Certified to the high efficacy requirements of California T24. Suitable for damp and wet locations (indoor covered ceilings).

DIMENSIONS

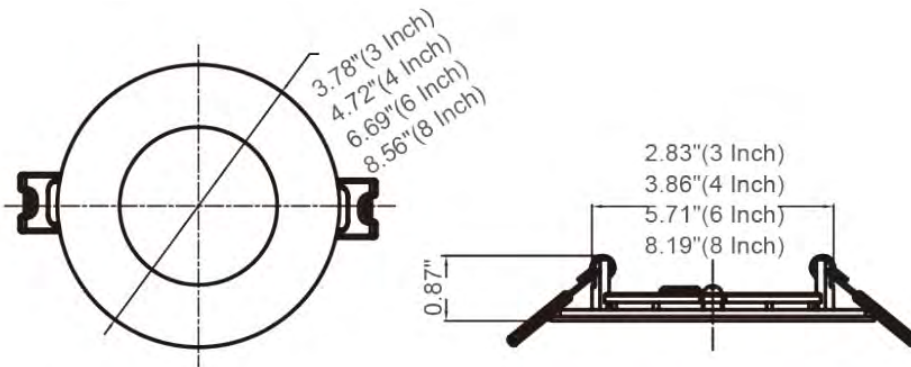

DF Round

| SERIES NUMBER | WEIGHT |
|-----------------|----------|
| DF 3R 5 G1 9FS | 0.93 lbs |
| DF 4R 7 G1 9FS | 1.03 lbs |
| DF 6R 9 G1 9FS | 1.64 lbs |
| DF 8R 15 G1 9FS | 2.1 lbs |

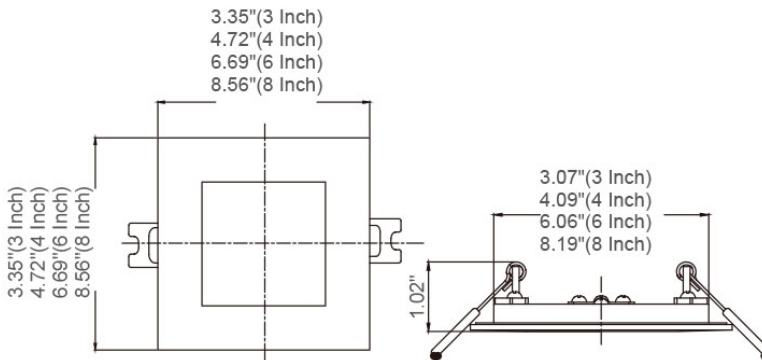

DF Square


| SERIES NUMBER | WEIGHT |
|------------------|--------|
| DF 4S 5 7 G1 9FS | 1 lbs |

Due to continuous product improvements, specification and/or equipment updates may change without notice.


PERFORMANCE DATA

| SERIES NUMBER | WATT | LUMENS | EFFICACY | REPLACEMENT |
|------------------|------|--------|----------|-------------|
| DF 3R 5 G1 9FS | 8W | 500 | 63 lm/W | 50W PAR |
| DF 4R 7 G1 9FS | 10W | 650 | 65 lm/W | 60W PAR |
| DF 6R 9 G1 9FS | 12W | 900 | 75 lm/W | 70W PAR |
| DF 8R 15 G1 9FS | 18W | 1,500 | 83 lm/W | 100W PAR |
| DF 4S 5 7 G1 9FS | 10W | 650 | 65 lm/W | 60W PAR |

PHOTOMETRIC DATA

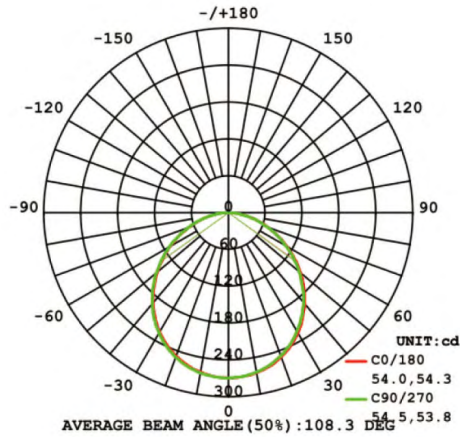

DF Round

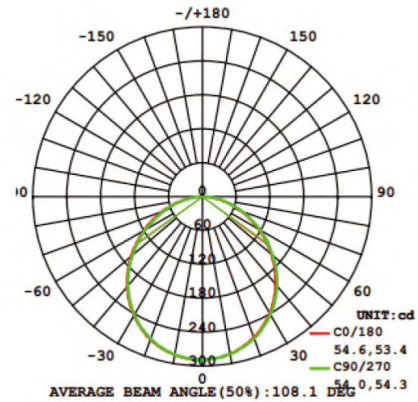

DF Square

SHIPPING INFORMATION

| Product number | Individual box weight | # per carton | Carton box weight |
|-----------------|-----------------------|--------------|-------------------|
| DF 3R 5 G1 9FS | 0.92 lbs | 30 pcs | 28.9 lbs |
| DF 4R 7 G1 9FS | 1.04 lbs | 30 pcs | 32.41 lbs |
| DF 6R 9 G1 9FS | 1.4 lbs | 30 pcs | 43.21 lbs |
| DF 8R 15 G1 9FS | 2 lbs | 12 pcs | 25.13 lbs |

DF Round

| Product number | Individual box weight | # per carton | Carton box weight |
|----------------|-----------------------|--------------|-------------------|
| DF 4S 7 G1 9FS | 1.07 lbs | 30 pcs | 33.29 lbs |

DF Square

Due to continuous product improvements, specification and/or equipment updates may change without notice.