

CWP CUT-OFF WALL PACK CCT3

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® cut-off wallpack comes in rugged cast-aluminum housing with excellent thermal design. Our CWP product offers a popular but classic appearance with sleek angle design. Delivering up to 16,776 lumens with different wattages options: 40W, 60W, 80W, 120W, and 120W selectable wattages and color temperature. Replacing up to 750-watt metal halide luminaires and provides energy saving up to 72%. Our CWP is ideal for outdoor applications such as car ports, loading areas, driveways, parking areas, and pathways. Suggested for wall mounting minimum above four feet from ground.



Photocell Included

**Rated Life 50,000 Hours
Warranty 5 Years**

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and Building Facades

FEATURES

- DLC Premium Qualified
- IP65 Rated
- UL/cUL Listed
- ColorTemp: 4000K, 5000K, CCT3 (120W)
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 4KV (40W/60W) / 6KV (80W/120W)
- Beam Angle: Cut-off
- Dimmable: 0-10V
- CRI: >80
- Operating temperature: - 40°F - 122°F
- Uniform and consistent color
- 10-30 foot height performance
- Material: Die Cast Aluminum
- Color: Bronze
- 5Year Warranty
- Optional Accessories for Purchase: Microwave Sensor, Emergency Drivers, Remote Programmer

ACCESSORIES

-  Microwave Sensor Kit
-  Emergency Drivers
-  Remote Programmer

SAMPLE NUMBER LED-FXCWP40/40K/BZ

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	FINISH COLOR
LED	FX	CWP	40	40K	BZ
LED Lighting	Fixture	Cutoff Wall Pack	<40 Watt	4000K	Bronze



CUT-OFF WALL PACK

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	PhotoCell	IP65 Rated	DLC (S/P)
39	9319	LED-FXCWP40/40K/BZ*	4000K	5,288	250	•	•	P
39	9320	LED-FXCWP40/50K/BZ*	5000K	5,356	250	•	•	P
63	9208	LED-FXCWP60/40K/BZ*	4000K	8,347	400	•	•	P
63	9209	LED-FXCWP60/50K/BZ*	5000K	8,425	400	•	•	P
83	9443	LED-FXCWP80/40K/BZ	4000K	11,048	400-575	•	•	P
83	9444	LED-FXCWP80/50K/BZ	5000K	11,193	400-575	•	•	P
121	9445	LED-FXCWP120/40K/BZ	4000K	16,525	575-750	•	•	P
121	9446	LED-FXCWP120/50K/BZ*	5000K	16,776	575-750	-	•	P
80	9554	FXCWP120SW/CCT3/BZ-PHO	3CCT	10,800	575-750	•	•	P
100			(30/40/50K)	13,500				
120				16,200				

*Motion Sensor Kit
K540380 SEN-ANT-11-WH/BA12V

ACCESSORIES (Ordered Separately)

Emergency Driver



7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED Emergency Driver for 39W)



7334 BAEM15-48BC/MV-A
(15W CEC Compliant LED Emergency Driver for 60W)

Microwave Sensor / Remote Programmer



K540380 SEN-ANT-11-WH/BA12V
(Microwave Sensor Kit 0-10V for #9319,9320,9208,9209,9446)



P10540 SEN-ANT-11-WH
(Remote Programmable Microwave Motion Sensor 0-10V Bi-Level Internal 12V Low Voltage for #9443,9444,9445,9554)



P10316 SEN-BRI-RC100
(Remote Programmer)

CUT-OFF WALL PACK


WALL & AREA LUMINAIRES

DIMENSIONS


39W
6.85-lbs

63W
7.05-lbs

83W
7.48-lbs

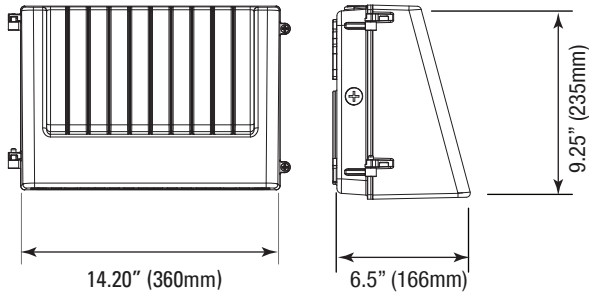

121W
10.56-lbs

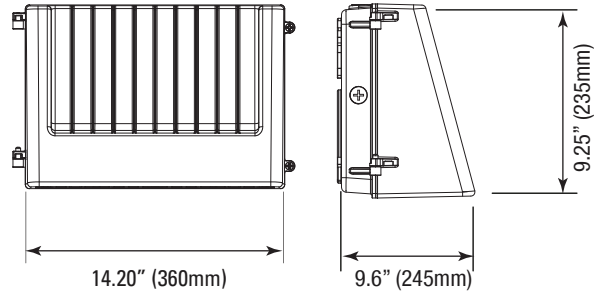

PHOTOMETRICS CHART

PACKAGE

39 Watt
DLC Premium

63 Watt
DLC Premium

83 Watt
DLC Premium

121 Watt
DLC Premium

Case Qty 1 pc

