




GE  
Lighting

### 62174 - F29T8SPX41/U/ECO


GE Ecolux® Watt-Miser® Mod-U-line® T8

- Saves energy compared to standard wattage lamps
- Passes TCLP, which can lower disposal costs.




### GRAPHS & CHARTS

Graphs\_Lamp Mortality

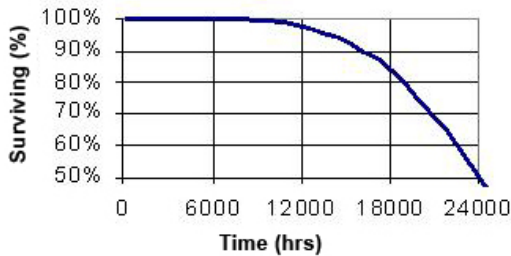

Graphs\_Spectral Power Distribution

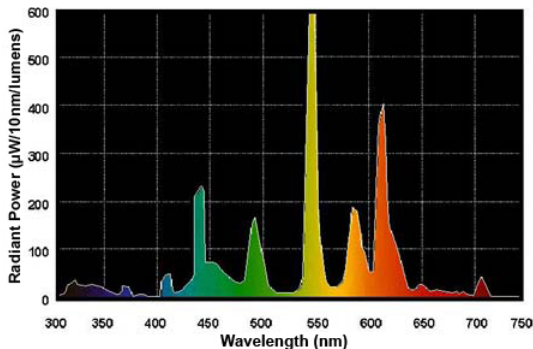

### GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - U-Shaped
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	24000.0 h
Rated Life (rapid start) @ Time	24000.0 @ 3.0/30000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	15.0 °C
Mercury Content (NOM)	8.0 mg
Picograms of Mercury (NOM)	151.5 pg
Additional Info	TCLP compliant
Primary Application	Energy Saving

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2500.0
Mean Lumens (NOM)	2200.0
Nominal Initial Lumens per Watt (NOM)	86.2069
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	82.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	29.0
Lamp Current (NOM)	265.0 mA

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	22.500 in(571.5 mm)
Nominal Length (NOM)	22.500 in(571.5 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Bulb Diameter in Bend (MAX)	1.100 in(27.9 mm)
Base Face to Top of Lamp (NOM)	22.250 in(565.2 mm)
Lamp Legs Center to Center Length (NOM)	1.625 in(41.3 mm)

### PRODUCT INFORMATION

Product Code	62174
Description	F29T8SPX41/U/ECO
Standard Package	Case
Standard Package GTIN	10043168621745
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168621748