

Project	Type
Catalog #	

## DESCRIPTION

VersaQube2 is a multi-purpose LED luminaire designed for indoor and outdoor area lighting applications. Delivering maximum lumens for >200,000 hours\* while using only 48 Watts of power, its compact design with enclosed power supply make it ideal for such applications as flood lighting, sign lighting, landscape and general area lighting. The VersaQube2 can be mounted to a wall, ceiling or conduit, making it one of the most versatile LED luminaires in the market.


## FEATURES

- Powered by a constant current power supply to achieve maximum efficiency (see separate data sheet)
- IP65 ingress protection
- Designed to meet Class 2 safety requirements
- 5-year warranty



## CERTIFICATION

- UL Listed USA+Canada File # E338791 approved
- LM-79 Test Report available

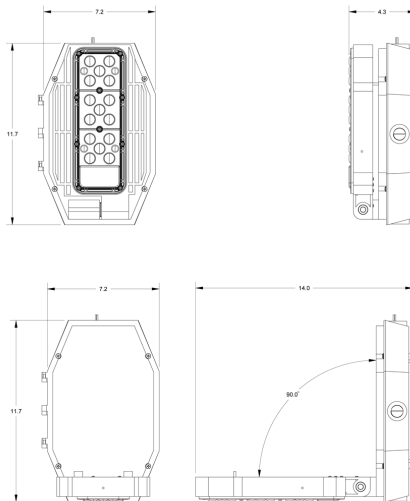

## ORDERING INFORMATION

Example: VQ2-1-UNVL-12-50

VQ2		UNVL	12	50
Series	Color	Input Voltage	Light Distribution Pattern	Color Temp
VQ2	1 Bronze	UNVL 120-277	12	50 5000K
	2 White	UNVH 347-480	5M	
	3 Black		2M	

Specifications and dimensions subject to change without notice.

# VersaQube2

Multi-Purpose Luminaire  
1-Qube. w/PS



### ENERGY DATA

Input Voltage (V AC)	120 - 277
System Level Power (W)	48
Delivered Lumens (Lm)	4740
System Efficacy (Lm/W)	98
Correlated Color Temp (K)	5000
Minimum CRI	70
LED L70 Lifetime (Hrs)*	>200,000
LED L85 Lifetime (Hrs)	>200,000
Operating Temp (°C)	-30 to 50

\* US LED product 'Lifetimes' refer only to the LED light engine, not the power source, and are based on the Illuminating Engineering Society's TM21 Calculated Lumen Maintenance methodology at a 25°C/77°F ambient temperature. The lifetimes are solely meant to be a guide for expected LED degradation and not a warranty or predictive of their actual life, which can be affected by ambient temperatures and other factors

### SPECIFICATIONS

Dimensions (in)	11.7 x 7.2 x 4.3
Units/carton	1
Net weight	8.5 lbs
Environmental Rating	Wet

DATASHEET 05.20.2015