

6" DOWNLIGHT 14.5W TITANIUM CRI^{SP} LED SERIES 4.0




14.5W REPLACES



**75W
Inc.**

80% Energy Savings

CRI^{SP}

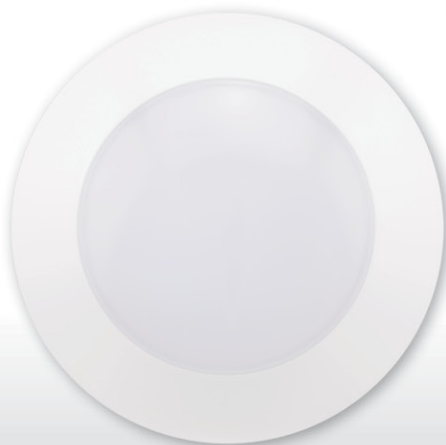

\$203 Savings per lamp*


- ⌚ Innovative CLICK design
- ⌚ Fits most 4" J-boxes and 5-6" recessed housings
- ⌚ Installs in just minutes - no rewiring
- ⌚ Exceptional color rendering CRI 90
- ⌚ Richer reds and natural skin tones (R9 60, R13 90)
- ⌚ Tight LED binning for consistent CCT across all lamps



40,000 H



DIMMABLE



EFFICACY



WARRANTY



CRI (Ra)



SEMI DIRECTIONAL




DOWNLIGHT PRODUCT FEATURES

DUAL INSTALLATION:


4" J-BOX FLUSHMOUNT

- Attach mounting bracket to J-box
- Click downlight into mounting bracket



5-6" CAN RECESSED

- Connect E26 adapter to the LED adapter
- Squeeze mounting springs and push downlight up until flush with ceiling

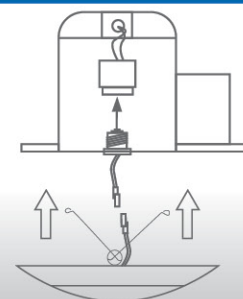

ACCESSORIES INCLUDED:



Mounting Bracket



J-Box Screws



Wire Nuts



LED Adapter



E26 Adapter



Mounting Springs

6" DOWNLIGHT 14.5W TITANIUM CRI^{SP} LED SERIES 4.0



APPLICATIONS

General Lighting



Recessed Lighting



Accent Lighting



SPECIFICATIONS**

Product Model	40842 14.5SMDL6G4DIM/927	40843 14.5SMDL6G4DIM/930	40847 14.5SMDL6G4DIM/840
Type	6" SMDL	6" SMDL	6" SMDL
Base	E26 / LED Adapter (GU24 optional)	E26 / LED Adapter (GU24 optional)	E26 / LED Adapter (GU24 optional)
Power (W)	14.5	14.5	14.5
Voltage - Frequency	120V 60Hz	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Warm White 2700K	Warm White 3000K	Natural White 4000K
CRI (Ra)	90	90	80
Typical lumens (lm)	950	1000	1200
Efficacy (LPW)	66	69	83
Beam Angle	110°	110°	110°
Dimmable	Yes***	Yes***	Yes***
Housing Compatibility	4" J-box / Most 5-6" housing	4" J-box / Most 5-6" housing	4" J-box / Most 5-6" housing
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	40,000	40,000	40,000
Dia. x MOL	7.32"x1.30" (186x33mm)	7.32"x1.30" (186x33mm)	7.32"x1.30" (186x33mm)
Weight (lb. / g)	0.45lb. / 204g	0.45lb. / 204g	0.45lb. / 204g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$30 LED with 40,000-hr lifetime
 ** Specification data is preliminary and may be subject to change

*** List of tested dimmer switches available on website
 **** Suitable for damp locations. Not for use where directly exposed to weather or water

Ref.#:DS060-SMDL-6-14.5W